


# DSB500-871HM

High Performance Digital Signage Player  
Supports Socket G2 3rd Generation Intel®  
Core™ Processor

**NEW**

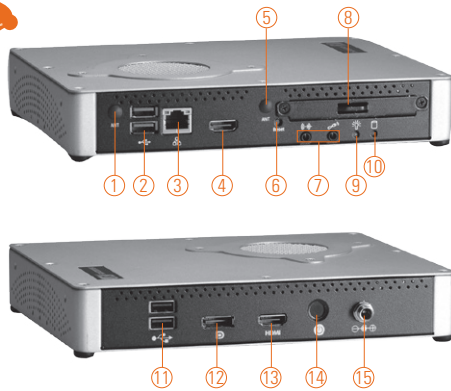

- |                            |                            |                  |
|----------------------------|----------------------------|------------------|
| 1. WiFi antenna (optional) | 6. Reset button            | 10. HDD LED      |
| 2. USB 3.0 x 2             | 7. Audio (Line-out/Mic-in) | 11. USB 2.0 x 2  |
| 3. Ethernet                | 8. 2.5" HDD tray           | 12. DisplayPort  |
| 4. HDMI                    | 9. Power LED               | 13. HDMI         |
| 5. Power button            |                            | 14. Power button |
|                            |                            | 15. 19V DC in    |



## Specifications

|                       |   |
|-----------------------|---|
| Standard Color        | Black/Grey  |
| Construction          | Heavy-duty steel  |
| CPU                   | Socket G2 (rPGA988B) socket for 3rd Generation Intel® Core™ i5/ i3 processors (Ivy Bridge)  |
| Chipset               | Intel® HM76 PCH   |
| System Memory         | 1 x 204-pin DDR3-1066/1333/1600 SO-DIMM max. up to 8 GB   |
| Storage               | 1 x 2.5" SATA HDD tray  |
| BIOS                  | AMI UEFI BIOS   |
| System I/O Outlet     | 1 x DisplayPort<br>2 x USB 3.0<br>2 x USB 2.0<br>1 x Audio (Line-out/Mic-in)<br>2 x HDMI<br>1 x 10/100/1000Mbps Ethernet<br>1 x power on/off button<br>1 x reset button |
| Indicator             | 1 x LED for system status   |
| WiFi                  | Optional 802.11 b/g/n   |
| Expansion Slot)       | 1 x PCI Express Mini Card   |
| Operating Temperature | 0°C ~ +40°C (+32°F ~ +104°F)  |
| Dimensions            | 210 mm (8.26") (W) x 165 mm (6.49") (D) x 35 mm (1.38") (H)   |
| Packing Dimensions    | TBD   |
| Weight (net/gross)    | 1.5 kg (3.3 lb)/ 2.5 kg (5.51 lb)   |
| Certification         | CE  |

## Features

- Supports Socket G2 (rPGA988B) 3rd Generation Intel® Core™ i5/ i3 processors
- Intel® HM76 chipset
- DDR3-1066/1333/1600 SO-DIMM max. up to 8 GB
- Optional wireless LAN module
- 1 DisplayPort, 2 HDMI
- One 2.5" SATA drive bay
- Supports wall mount and VESA mount
- Supports 2 USB 3.0 ports
- Supports TPM 1.2

Overview

Industrial Panel  
Computers &  
Monitors

Heavy-duty Fanless  
Touch Panel  
Computers

Digital  
Signage  
Solutions

Healthcare  
& Medical  
Solutions

Open Frame  
Panel  
Computers

Accessories

## Optional EOS Installation

Windows® XP Embedded

## Optional OS Installation

Windows® XP, Windows® 7, Windows® Embedded 8

## Ordering Information

### Standard

DSB500-871HM High performance digital signage player supports Socket G2 3rd Gen. Intel® Core™ processor

### Optional

Wireless Lan kit Wi-Fi module and antenna

VESA mount kit

Wall mount kit

\* Specification and certifications are based on options and may vary.