

SPL-101GT++-12V



SPL-101GT++-12V

➔ Industrial 1-port Gigabit PoE Splitter, 60Watts Output


Features

- Fully compliant with IEEE802.3af/at standard
- Supports 10/100/1000Base-T(X) for PoE In and Data Out
- Support PoE P.D input up to 90Watts
- Power Isolation and Short Circuit Protection for Power Output
- Auto protection for Over Voltage Power Input
- Supports Power Output up to 60Watts/12VDC
- IP-30 Rugged Case Design
- DIN-Rail and Wall Mount Design




Introduction

SPL-101GT++-12V is a high power plus PoE Splitter for use in Power over Ethernet systems. With Ethernet Input (data + power) port and Output (data only) port, SPL-101GT++-12V may split power from existing LAN cable and convert up to 12VDC/5A for power hungry applications such as Wireless APs, Security cameras and IP Phones. The internal current limit, short-circuit and overload protection are implemented for use as a DC power supply.

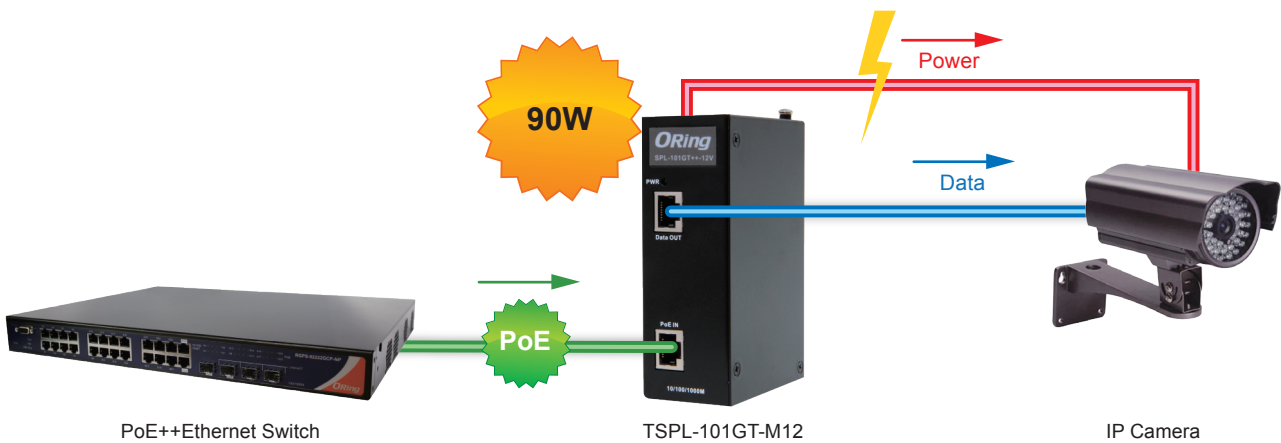

Dimensions

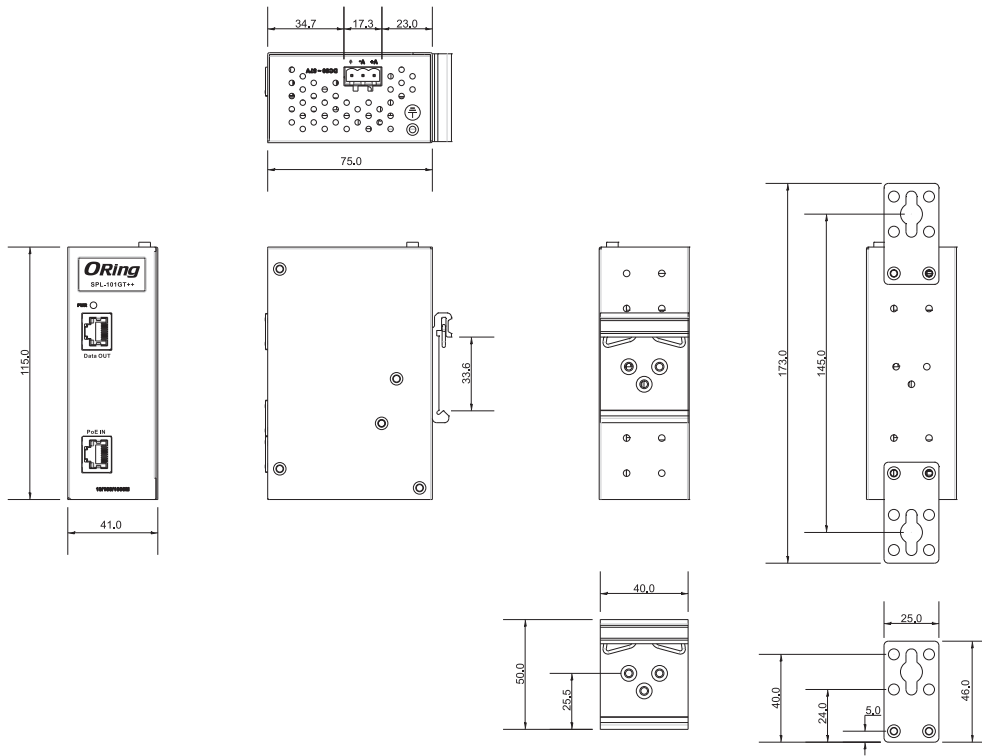

(Unit=mm)

Connectors and Pin Definitions

[PoE Definition 1]

1000 Base-T

Pin No.	RJ-45 Input (Data and Power)		RJ-45 Output (Data Only)	
	Symbol	Description	Symbol	Description
1	BI_DA+(Vdc1+)	Data BI_DA+ and Feeding Power(+)	BI_DA+	Data BI_DA+
2	BI_DA-(Vdc1+)	Data BI_DA- and Feeding Power(+)	BI_DA-	Data BI_DA-
3	BI_DB+(Vdc1-)	Data BI_DB+ and Feeding Power(-)	BI_DB+	Data BI_DB+
4	BI_DC+(Vdc2+)	Data BI_DC+ Feeding Power(+)	BI_DC+	Data BI_DC+
5	BI_DC-(Vdc2+)	Data BI_DC- Feeding Power(+)	BI_DC-	Data BI_DC-
6	BI_DB-(Vdc1-)	Data BI_DB- and Feeding Power(-)	BI_DB-	Data BI_DB-
7	BI_DD+(Vdc2-)	Data BI_DD+ Feeding Power(-)	BI_DD+	Data BI_DD+
8	BI_DD-(Vdc2-)	Data BI_DD- Feeding Power(-)	BI_DD-	Data BI_DD-

10/100 Base-T(X)

Pin No.	RJ-45 Input (Data and Power)		RJ-45 Output (Data Only)	
	Symbol	Description	Symbol	Description
1	Rx+(Vdc1+)	Data Receive and Feeding power(+)	Rx+	Data Receive
2	Rx-(Vdc1+)	Data Receive and Feeding power(+)	Rx-	Data Receive
3	Tx+(Vdc1-)	Data Transmit and Feeding power(-)	Tx+	Data Transmit
4	NC(Vdc2+)	Not Connected Feeding power(+)	NC	Not Connected
5	NC(Vdc2+)	Not Connected Feeding power(+)	NC	Not Connected
6	Tx-(Vdc1-)	Data Transmit and Feeding power(-)	Tx-	Data Transmit
7	NC(Vdc2-)	Not Connected Feeding power(-)	NC	Not Connected
8	NC(Vdc2-)	Not Connected Feeding power(-)	NC	Not Connected

Specifications

ORing Splitter Model	SPL-101GT++-12V
Physical Ports	
RJ-45 Ethernet Port with P.S.E. Input	1
RJ-45 Ethernet Port Output	1
Power Output Connector	4-pin terminal block
Operating Voltage	
Power Output Voltage	12V @ 5A ±5% typical
LED Indicator	
Power Indicator	PWR / Ready: 1 x LED Green On: Power is on and functioning Normally.
Power	
Input Power	90W PD input
Protection	
Short Circuit Protection	Present
Over Load Protection	Present
Physical Characteristic	
Enclosure	IP-30
Dimension (W x D x H)	41(W) x 75 (D) x 115 (H)mm (1.61 x 2.95 x 4.52 inch)
Weight (g)	366g
Environmental	
Storage Temperature	-40 to 80°C (-40 to 176°F)
Operating Temperature	-40 to 75°C (-40 to 167°F)
Operating Humidity	5% to 90% Non-condensing
Regulatory approvals	
EMC	EN55032 EN55024
EMI	FCC Part 15B Class A CISPR 22 class A
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11
Shock	IEC60068-2-27
Free Fall	IES60068-2-6
Vibration	IEC60068-2-6
Safety	EN60950-1
MTBF	1676582hr
Warranty	5 years

Ordering Information

SPL - 101GT ++ -12V

Code Definition	Output voltage
Option	++ : 90Watts High Power Plus PoE

Available Model	Model Name	Description
	SPL-101GT++-12V	Industrial 1-port Gigabit PoE++ Splitter, 60Watts/12VDC Output

Packing List

- SPL-101GT++-12V x 1
- DIN-Rail Kit x 1
- Wall-mount Kit x 1

Industrial Ethernet Switch
 Industrial Media Converter
 Industrial Device Server
 Industrial Wireless Access Point
 Industrial Cellular VPN Router
 Industrial M2M Gateway
 Accessories
 Network Management Software