

REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2010.09.15	蔡華明
02	Δ	變更圖號	2012.04.03	曹 熙

Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩMin.
 Dielectric Withstanding Voltage: 500VAC
 Contact Resistance: 20mΩMax.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T or the equivalent material
 All materials must meet Greenconn requirement for environment protection.

Ordering Information


G PFA203 - XX XX A 333 B 1 B X

No. of Pins per Row
02~40

Standard Plating
02=Gold Flash
Selective Plating
01=Tin
05=Gold Flash/Tin

Color
1=Black

Standard Packing
A=box
Selective Packing
C=Tube

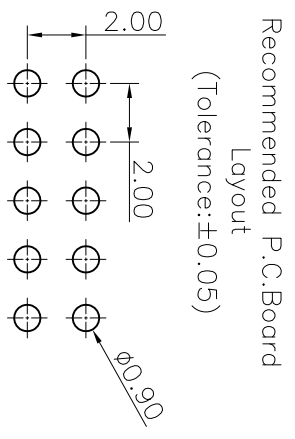

格 菱 股 份 有 限 公 司 Greenconn Corporation		GENERAL TOLERANCE X. ±5.0° X. ±3.0° .XX ±2.0° .XXX ±1.0°		DESIGN: 曹 熙 CHECKED: 劉北平 AUDITED: 李 輝 APPROVED: cc_li		DWG. NO. GPFA203-CA333BB		TITLE: 2.00 PIN HEADER DUAL ROWS DIP TYPE CONNECTOR	
REV. 02	UNIT. mm	SCALE. 4:1	PAGE. 1/1	DATE: 2012.04.03 DATE: 2012.04.03 DATE: 2012.04.03 DATE: 2012.04.03		PART NO. GPFA203-XXXX A333B1BX			

