

LISA2-M-PIN

~20° medium beam. 6.8 mm high variant with location pin installation.


TECHNICAL SPECIFICATIONS:

Dimensions	Ø 9.9 mm
Height	6.8 mm
Fastening	glue, pin
Colour	black
Box size	
Box weight	1.4 kg
Quantity in Box	2000 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
LISA2-M	Lens	PMMA	clear
LISA2-HLD-PIN	Holder	PC	black

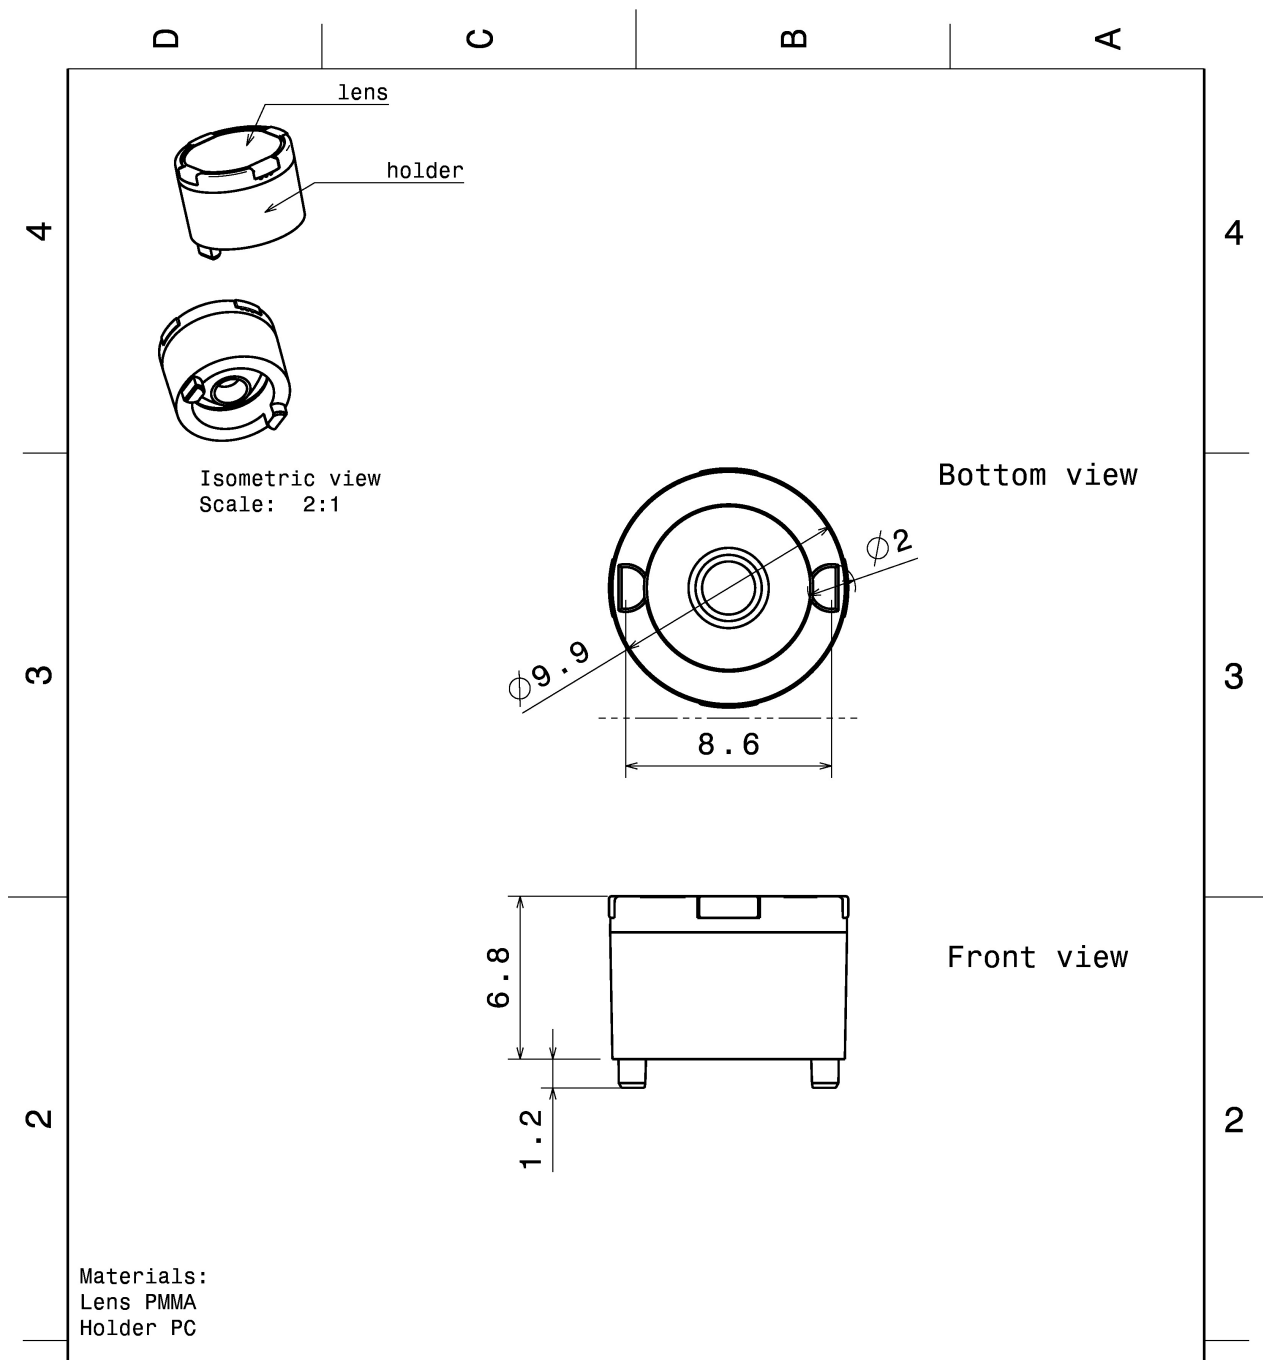


This drawing is our property. It can't be reproduced or communicated without our written agreement.				LediL Oy Salorankatu 10 FIN-24240 SALO Finland	
DRAWN BY p1		DATE 20.06.2012		DRAWING TITLE Datasheet Lisa2-Pin-XT Series Assy	
CHECKED BY	DATE	SIZE A4	DRAWING NUMBER		REV 1
DESIGNED BY p1	DATE 20.06.2012	SCALE 4:1	WEIGHT (g)	SHEET 1/1	



PHOTOMETRIC DATA (MEASURED):





LED XP-G2
 FWHM 25.0°
 Efficiency 89 %
 Peak intensity 3.500 cd/lm
 Required components:

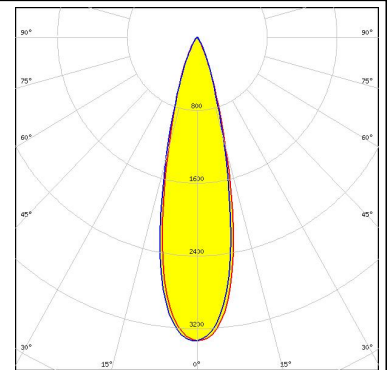



LED XP-G3
 FWHM 21.0°
 Efficiency 84 %
 Peak intensity 3.600 cd/lm
 Required components:

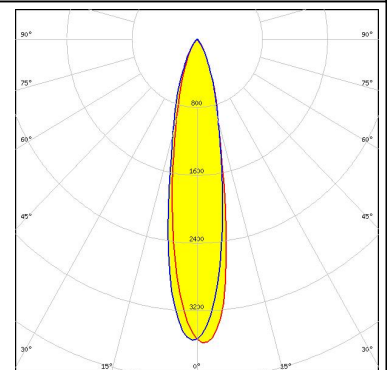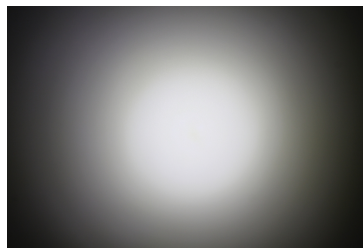


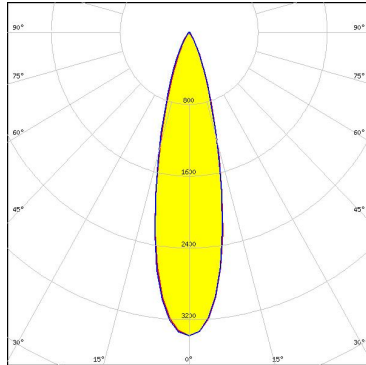
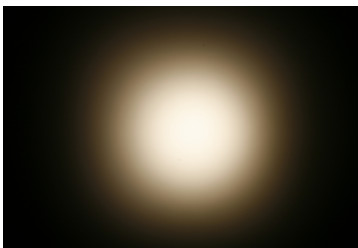
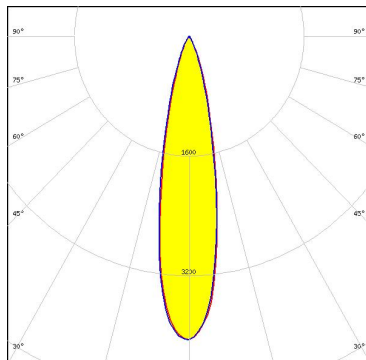

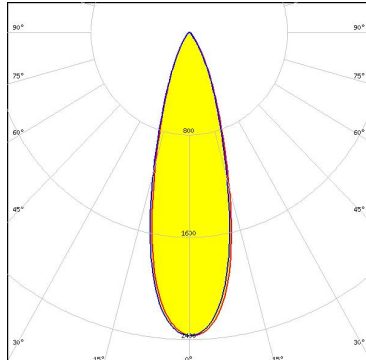
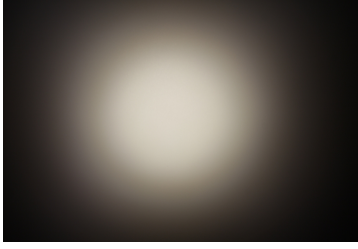
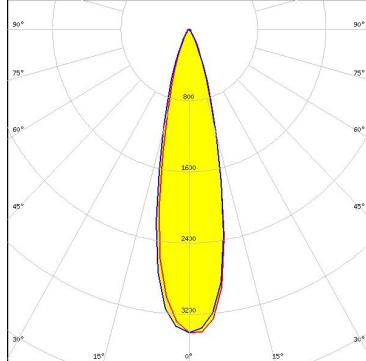
LED XT-E
 FWHM 26.0°
 Efficiency 89 %
 Peak intensity 3.260 cd/lm
 Required components:

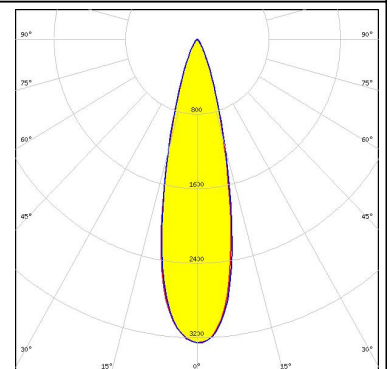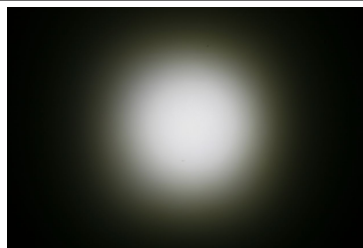

LED LUXEON T
 FWHM 28.0°
 Efficiency 87 %
 Peak intensity 2.700 cd/lm
 Required components:

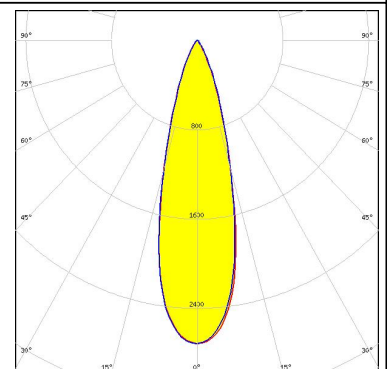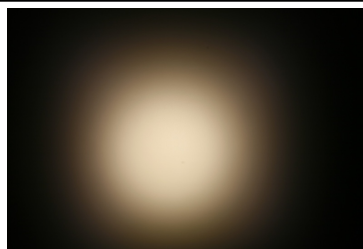

PHOTOMETRIC DATA (MEASURED):

<p>LUMILEDS</p> <p>LED LUXEON TX</p> <p>FWHM 26.0°</p> <p>Efficiency 88 %</p> <p>Peak intensity 3.380 cd/lm</p> <p>Required components:</p>		
<p>NICHIA</p> <p>LED NCSxx19B</p> <p>FWHM 23.0°</p> <p>Efficiency 85 %</p> <p>Peak intensity 4.100 cd/lm</p> <p>Required components:</p>		
<p>NICHIA</p> <p>LED NVSxx19B/NVSxx19C</p> <p>FWHM 30.0°</p> <p>Efficiency 86 %</p> <p>Peak intensity 2.400 cd/lm</p> <p>Required components:</p>		
<p>OSRAM Opto Semiconductors</p> <p>LED Oslon Square EC</p> <p>FWHM 26.0°</p> <p>Efficiency 84 %</p> <p>Peak intensity 3.400 cd/lm</p> <p>Required components:</p>		

PHOTOMETRIC DATA (MEASURED):

OSRAM
Opto Semiconductors


LED SFH 4715S
FWHM 22.0°
Efficiency %
Peak intensity cd/lm
Required components:

OSRAM
Opto Semiconductors

LED SFH 4725S
FWHM 23.0°
Efficiency 0 %
Peak intensity 0.000 cd/lm
Required components:


SAMSUNG

LED LH181B
FWHM 20.0°
Efficiency 78 %
Peak intensity 2.900 cd/lm
Required components:

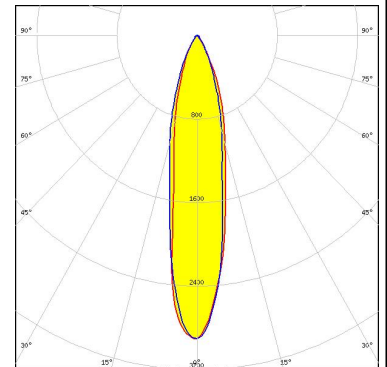

SAMSUNG


LED LH351B
FWHM 31.0°
Efficiency 87 %
Peak intensity 2.600 cd/lm
Required components:

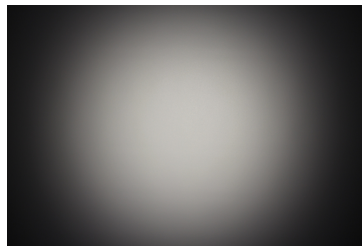

PHOTOMETRIC DATA (MEASURED):

SAMSUNG

LED LH351Z
FWHM 26.0°
Efficiency 87 %
Peak intensity 3.500 cd/lm
Required components:

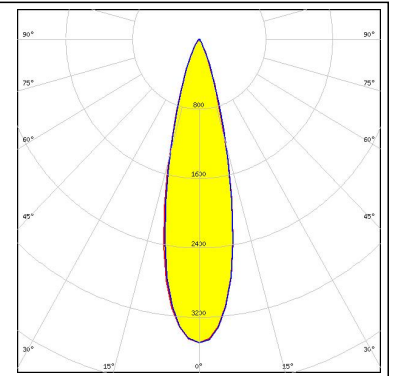

PHOTOMETRIC DATA (SIMULATED):

LUMILEDS


LED LUXEON IR Compact
 FWHM 14.0°
 Efficiency 82 %
 Peak intensity 0.000 cd/lm
 Required components:

LUMILEDS

LED LUXEON IR Domed 150
 FWHM 20.0°
 Efficiency 88 %
 Peak intensity 0.000 cd/lm
 Required components:


NICHIA

LED NVSxE21A
 FWHM 18.0°
 Efficiency 85 %
 Peak intensity 4.530 cd/lm
 Required components:

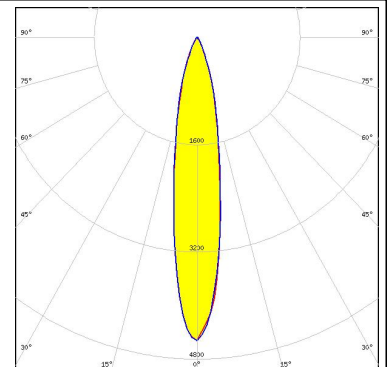

OSRAM
Opto Semiconductors


LED Oslon Square Gen3
 FWHM 21.0°
 Efficiency 91 %
 Peak intensity 4.430 cd/lm
 Required components:

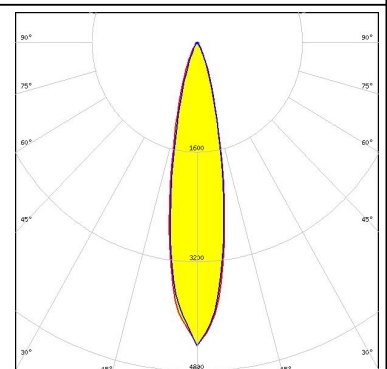

PHOTOMETRIC DATA (SIMULATED):



OSRAM
Opto Semiconductors

LED Oslon SSL 150
 FWHM 16.0°
 Efficiency 91 %
 Peak intensity 7.900 cd/lm
 Required components:

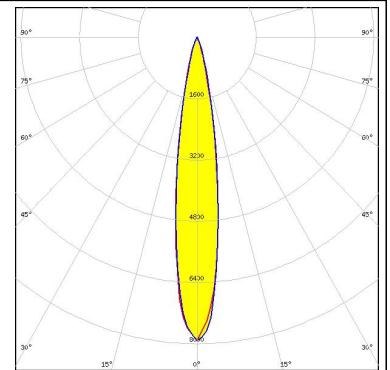


OSRAM
Opto Semiconductors

LED SFH 4715AS
 FWHM 26.0°
 Efficiency 89 %
 Peak intensity cd/lm
 Required components:

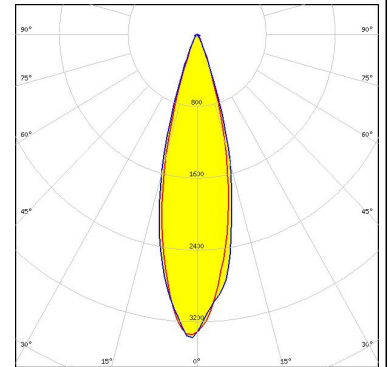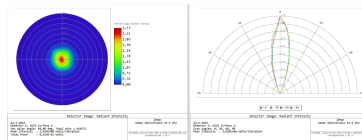

OSRAM
Opto Semiconductors


LED SFH 4716AS
 FWHM 16.0°
 Efficiency 89 %
 Peak intensity 0.000 cd/lm
 Required components:

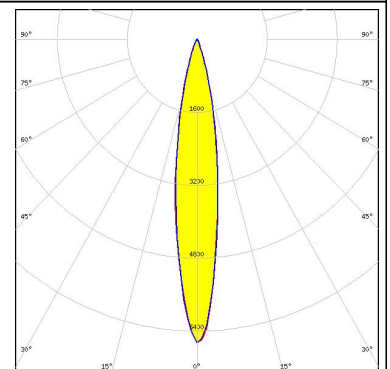


SEOL

SEOUL SEMICONDUCTOR

LED Z5M1/Z5M2
 FWHM 23.0°
 Efficiency 91 %
 Peak intensity 3.990 cd/lm
 Required components:

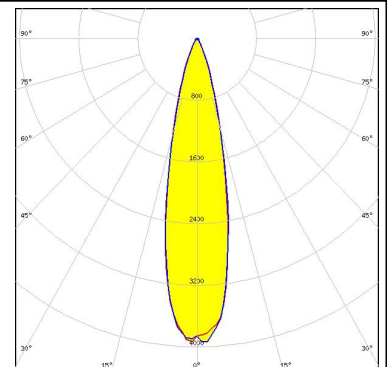

PHOTOMETRIC DATA (SIMULATED):

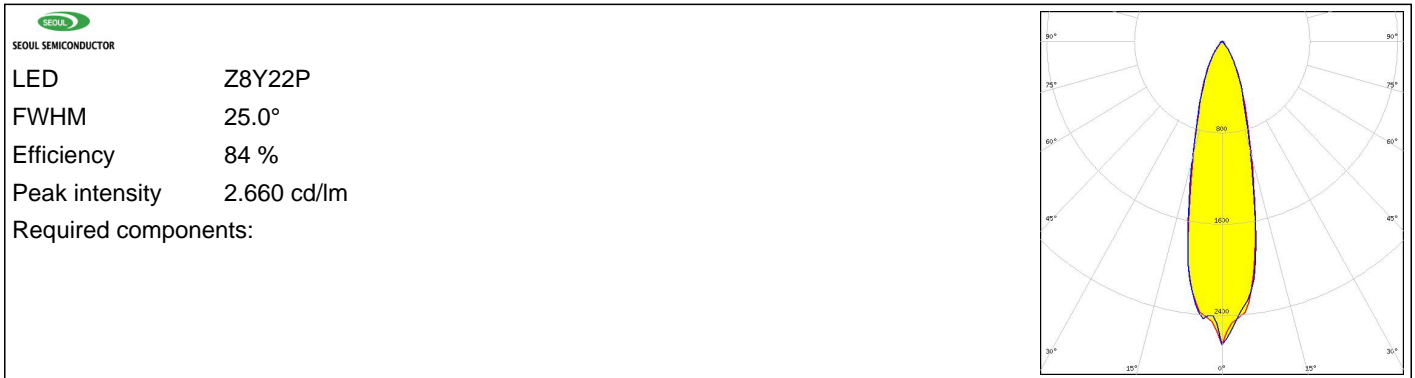

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)