
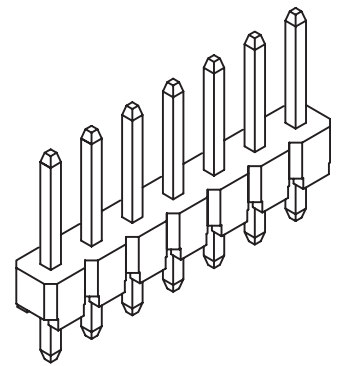


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.	2007.09.15	张荣


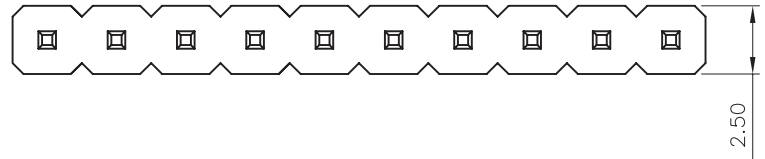


**Specifications**


Current Rating: 3Amp  
 Insulation Resistance: 1000M Min.  $\Omega$   
 Dielectric Withstanding: 600V AC  
 Contact Resistance: 20m Max  $\Omega$   
 Operating Temperature: -40°C to +105°C

**Materials**

Contact Material: Brass  
 Insulation Material: Polyester, UL 94V-0 PBT  
 All materials must be GP materials

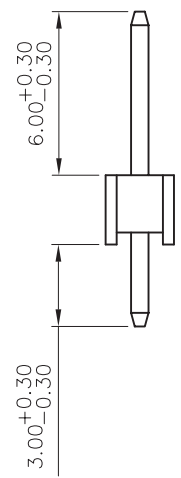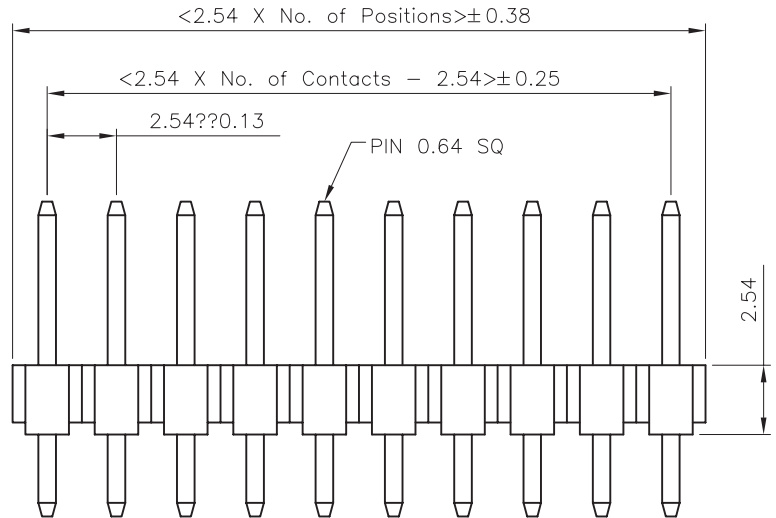

**Recommended P.C.Board**



CIXI ULO ELECTRONICS CO., LTD					<b>GENERAL TOLERANCE</b>		DESIGN: 张荣	DATE: 2007.09.15	DWG. NO.	TITLE: 2.54 PIN HEADER SINGLE ROW DIP TYPE BASE 2.54H
					X.° ± 5.0°	X. ± 0.30	CHECKED:	DATE:	PART NO.	
REV. 01	UNIT. mm	SCALE. 5:1	PAGE. 1/1	.X° ± 3.0°	.X ± 0.25	AUDITED:	DATE:	ULO-PH409		
				.XX° ± 2.0°	.XX ± 0.15	APPROVED:	DATE:			
				.XXX° ± 1.0°	.XXX ± 0.10					

F  
E  
D  
C  
B  
A

F  
E  
D  
C  
B  
A

1 2 3 4 5 6 7 8 9

1 2 3 4 5 6 7 8 9