



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.


| | | | | |
|------|-----------------|------------|-------|------------------------------|
| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
| A | Initial Release | 2017/04/11 | Mafei | Change Revision From 01 To A |

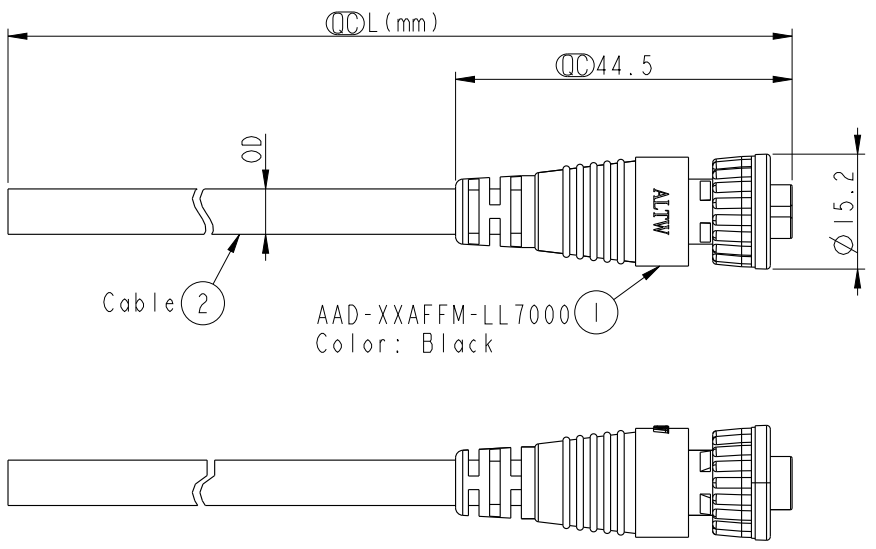

AAD-XXAFFM-LL7AXX

| | |
|----------|------------------|
| 02: 2Pin | XX : 01~99Meters |
| 03: 3Pin | 01 : 01Meter |
| | 02 : 02Meters |
| | ... |
| | 99 : 99Meters |

| | |
|------------|------------|
| 3 Black | 2 Red |
| 2 Blue | 1 Black |
| 1 Brown | |
| Pin # Wire | Pin # Wire |

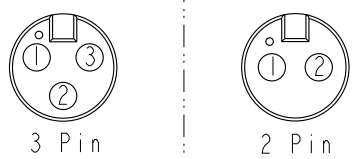

| | | | | |
|----------|--------------|----------|-----|-------------------|
| 3P | PVC | 4.5 | 24 | AAD-03AFFM-LL7AXX |
| 2P | | 4.2 | | AAD-02AFFM-LL7AXX |
| Contacts | Cable Jacket | Cable OD | AWG | Item No. |

Note:

- * \varnothing Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Cable: UL2464 24AWG+D+AL/Wy PVC Jacket UV Resistant, Black.
- * Cable Length Tolerance: 01M: 40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT: mm

TOLERANCE ±0.50mm

| | | | |
|---------------------------------------|----------------|---------------------------------|--|
| TITLE MINI CABLE LOCK F CONN F PIN | | | |
| SCALE 1:1 | SIZE A4 | SHEET 1 OF 1 | |
| REV. A | WC-REV. A.1 | \varnothing : Inspection item | |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | | |
|------------------------------|---------------------|--------------------|
| ITEM NO. | DRAWN BY Mafei | DATE 2017-04-11 |
| DWG NO. AAD-XXAFFM-LL7AXX | CHECKED BY Jerry | DATE 2017-04-11 |
| CUSTOMER ALTW | APPROVED BY Max | DATE 2017-04-11 |