
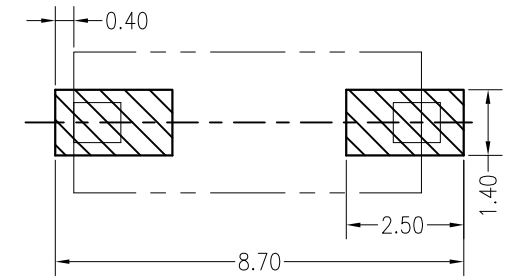
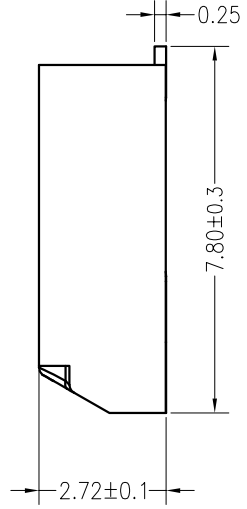





REV	ECN No.	DESCRIPTION	DESIGN	DATE
A0		Release	吴丹平	2017.08.31

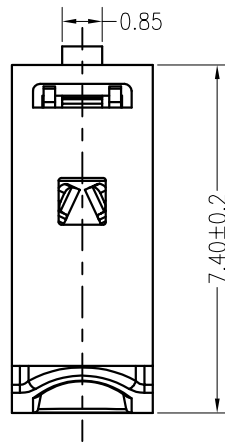

Board Layout

主要技术参数 Main Specifications

线 数 (Poles): 01 to 03
 接触电阻 (Contact resistance): $\leq 20m\Omega$
 绝缘电阻 (Insulation resistance): $\geq 800M\Omega$
 额定电压 (Rated voltage): 275V AC DC
 额定电流 (Rated current): 2.0A AC DC
 耐 电 压 (Withstand Voltage): 800V AC/minute
 温度范围 (Temperature Range): $-40^{\circ}C \sim +110^{\circ}C$

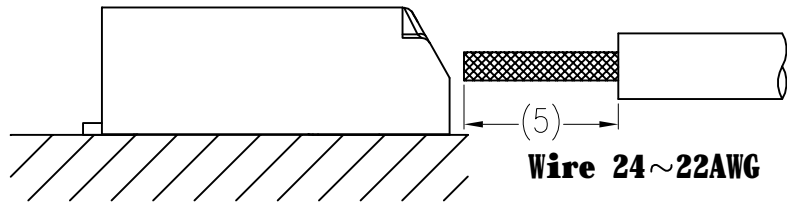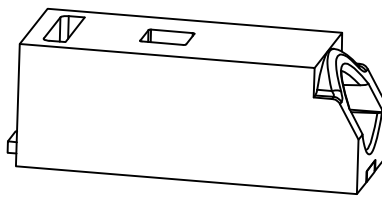

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
B	CONTACT	1 PCS	PhosphorBronze	Matte Sn
A	HOUSING	1 PCS	LCP/PA9T	UL 94V-0, COLOR:BEIGE

LEDsconn			TITLE: -	
			3.0mmPITCH 90°WAFER SMT TYPE	
X.±0.5	X.±5'	USE: CUSTOMER	PART NO.:	
.X±0.3	.X±2'			
.XX±0.25	.XX±1'	APPD:	DWG NO.:	
--	--	CHKD:		
UNITS: mm		DR:	SCALE 1 : 1	SHEET 1 / 1