







SPECIFICATIONS

Rated Current:1.0AMP
 Contact Resistance:20mΩ Max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min
 Operation Temperature:-40°C to +105°C

Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:Polyester(UL94V-0)
 Standard: PA6T
 Max.Processing Temp: 230°C for 30-60 seconds
 (260°C for 10 seconds)

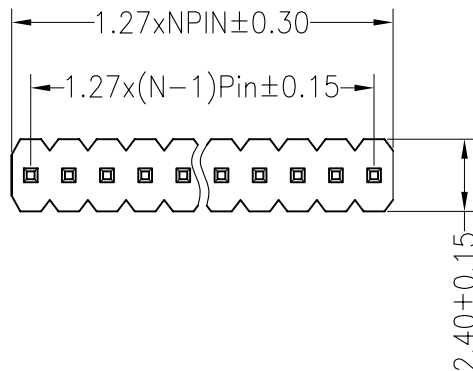

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

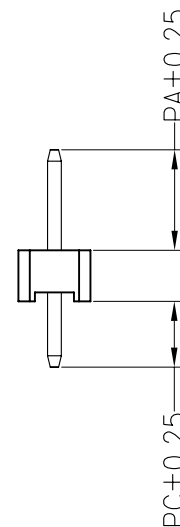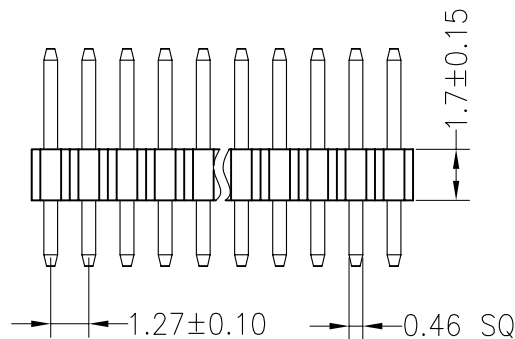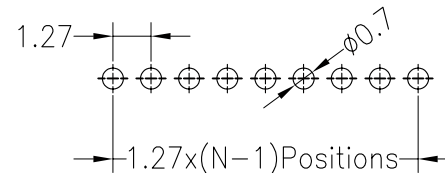

Dimension antitheses list			
ITEM	PA	PC	L
Standard	2.75	2.75	7.20
Alternate			

OPERATION

DRAW

SCALE

FIT

X.X ±0.30

CHECK

UNIT

mm

X.XX ±0.20

X.XXX ±0.10

Angle ±3°

APPROVE

SIZE

A4

SHEET

1/1

PROJ.

CONNTHERM

PART NO.

PLHS-xxS-JL

TITLE:

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL	OPERATION	DRAW	SCALE	FIT	CONNTHERM	
A0		NEW DRAWING				X.X ±0.30	CHECK	UNIT	mm	PART NO.	PLHS-xxS-JL
						X.XX ±0.20		SIZE	A4	TITLE:	
						X.XXX ±0.10		SHEET	1/1		
						Angle ±3°	APPROVE	PROJ.			