


Reference PCB layout
Unit:mm tolerance:±0.05

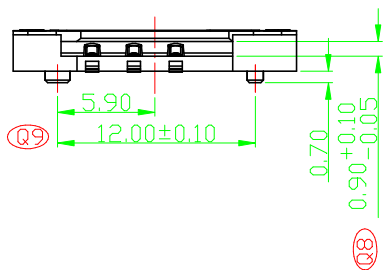

⑩ SPECIFICATION:

- 1.壽命:10000Cycles Min.
- 2.Contact Force:0.2~1.0N.(卡片厚度0.76mm)
- 3.接觸阻抗:50mΩ, typical,100mΩ Max.
- 4.絕緣阻抗:Min 1000MΩ/500V DC
- 5.open/lock force: 6N ± 3N
- 6.平貼:IR前後CP8 0.10mm Max; 塑膠0.20mm
- 7.ⓧ 為重點檢驗尺寸.

Table A

材質	塑膠	LCP E130i BK HF
	端子	C5210R-H T=0.20mm HF
端子電鍍	整體打鍍底50u"Min,接觸區刷金3u"Min, 焊接區浸鍍純霧錫100u"Min.	

Welink Electronics Factory

物料編號 PART NO.		5210625-SINR15-2		材料 MATERIAL	參閱 Table A	機種型號 MODEL NO.	708
核 APPROVED	准	圖名 TITLE	成品圖				
審 CHECKED	核	圖 DRAWING NO.	DOC-DWG-H33942-000				
設 DESIGNED	陳明星	日期 DATE	07/01/15	圖紙 SIZE	A4	比例 SCALE	1/1
符號 SYM.		日期 DATE		圖紙 SIZE		SHEET 1 OF 1	
內 DESCRIPTION OF REVISIONS		繪圖 DRAWN		核 APPROVED		角單 UNIT	
TOLERANCES UNLESS OTHERWISE SPECIFIED		0.00		±0.08		0.00° ±1°	
0.0		±0.10		0.0° ±2°		3RD. ANGLE'S	
0.		±0.15		0.° ±3°		mm	
		±0.20		0.° ±3°		角單 UNIT	