
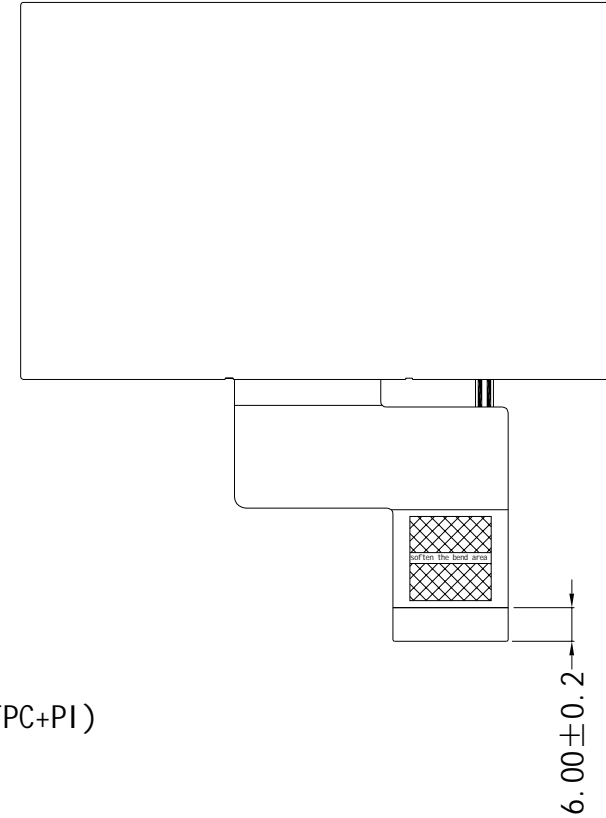
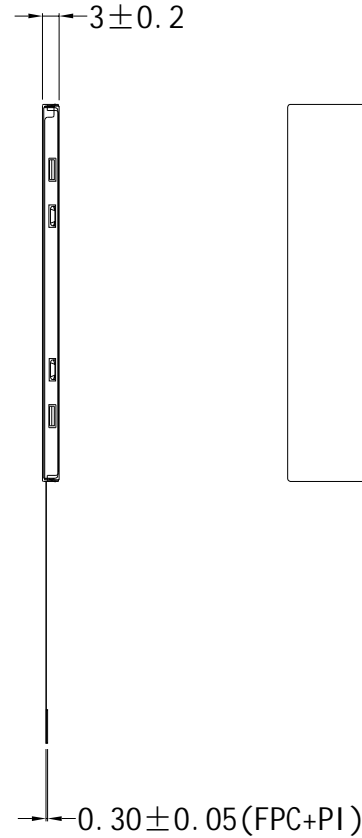


REV.	CHANGE CONTENT	BY	DATE
A	FIRST	王新兴	2021.02.01

### FRONT VIEW

### SIDE VIEW

### BOTTOM VIEW

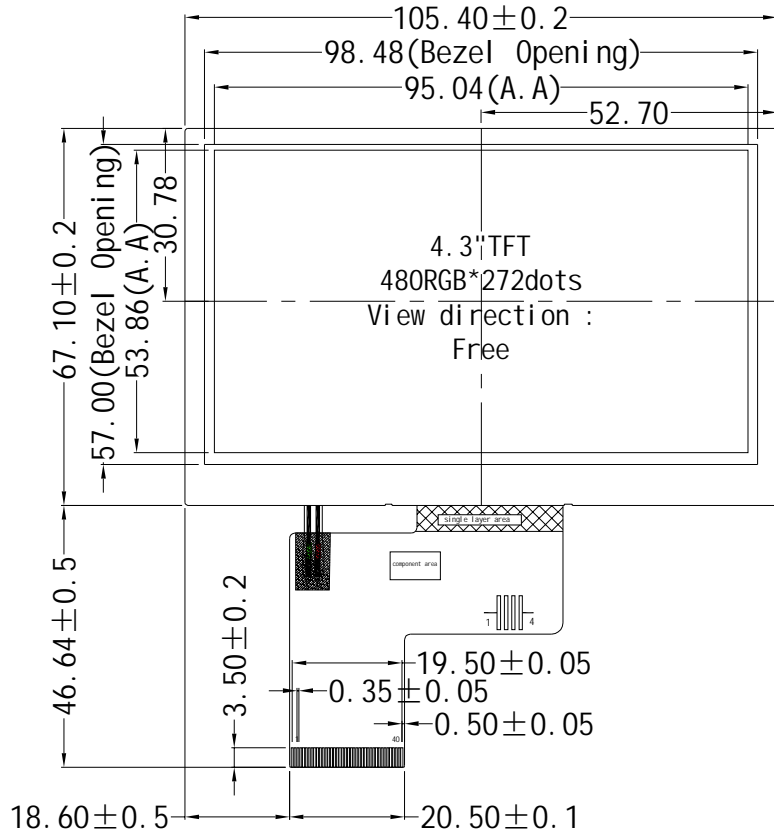

PIN	NAME
1	K
2	A
3	GND
4	DVDD
5	RO
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HS
33	VS
34	DE
35	NC
36	GND
37	XR(NC)
38	YD(NC)
39	XL(NC)
40	YU(NC)

#### TFT NOTE:

显示类型 Display type	4.3 480RGB*272
显示模式 Display mode	Transmissive Normally BLACK
视察方向 Viewing direction	<input type="checkbox"/> 6 <input type="checkbox"/> 12 <input type="checkbox"/> 3 <input type="checkbox"/> 9 <input checked="" type="checkbox"/> Free
对比度 Contrast ratio	800:1
亮度 Luminance	500 cd/m <sup>2</sup> TYP
接口类型 Interface	<input type="checkbox"/> SPI <input type="checkbox"/> LVDS <input checked="" type="checkbox"/> TTL/RGB <input type="checkbox"/> MCU
供电电压 VDD	<input checked="" type="checkbox"/> 3.3V <input type="checkbox"/> 5V
工作温度 Operation temperature	-20℃ to 70℃
存储温度 Storage temperature	-30℃ to 80℃
驱动芯片型号 Driver IC	SC7283-G4-1
FPC连接方式 FPC Connection	<input checked="" type="checkbox"/> Plug-in type <input type="checkbox"/> welded
环保要求 Environmental requirements	<input checked="" type="checkbox"/> RoHS 2.0 <input type="checkbox"/> REACH
未标注公差 Unmarked tolerance	0.20

PIN(K) ← ← ← ← ← ← ← ← PIN(A)

BACKLIGHT: 7 CHIP-WHITE LED  
IF=20mA(constant current) VF=20.3~23.8V



DRAWING No. : HT0430DI01A(HT0430T6034LR09ANN)

DRAWING TITLE:TFT

FILE NO. : 1

DESIGN	王新兴	2021.02.01	REV. : A	SCALE: 1:1
CHECKED	JYQ	2021.02.01	PROJECTION:	UNIT: mm
APPROVED	JYQ	2021.02.01	⊙	SHEET: 1/1