

Connector

Electrical Characteristics:





Current Rating: 1 AMP
 Insulator Resistance: 1000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:

Housing: PBT Glass Fiber UL94V-0
 Contacts: Brass
 Plating: Gold plated over nickel
 Cable: 1.27mm(0.050") pitch flat cable



Features:

- * Fast connection of flat cable to PC board.
- * Recommended 28AWG 1.27mm(0.05") flat cable.
- * Plug directly into 2.54mmX2.54mm PC board.

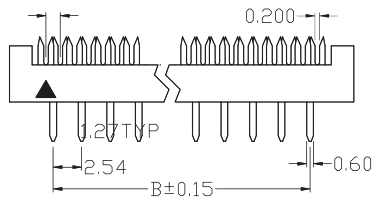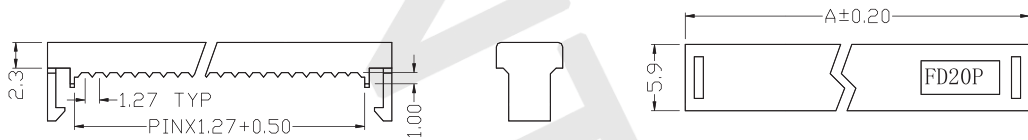

Dimension

Position	A	B
06	12.82	5.08
08	15.36	7.62
10	17.90	10.16
14	22.98	15.24
16	25.52	17.78
20	30.60	22.86
24	35.68	27.94
26	38.22	30.48
30	43.30	35.56
34	48.38	40.64
40	56.00	48.26
50	68.70	60.96

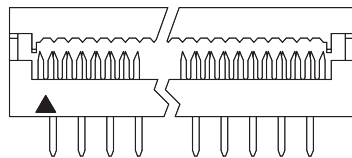

P.C.B Layout