

CONNTHERM

Tactile switch SMD

Characteristics:

Rating:DC12V 50mA

Travel:0.20±0.1mm

Operating Force:160~260±50gf


Contact Resistance:100mΩ Max.

Life:50000~100000 Cycles Min.

Operating temperature range: -20°C~70°C



Dimensions

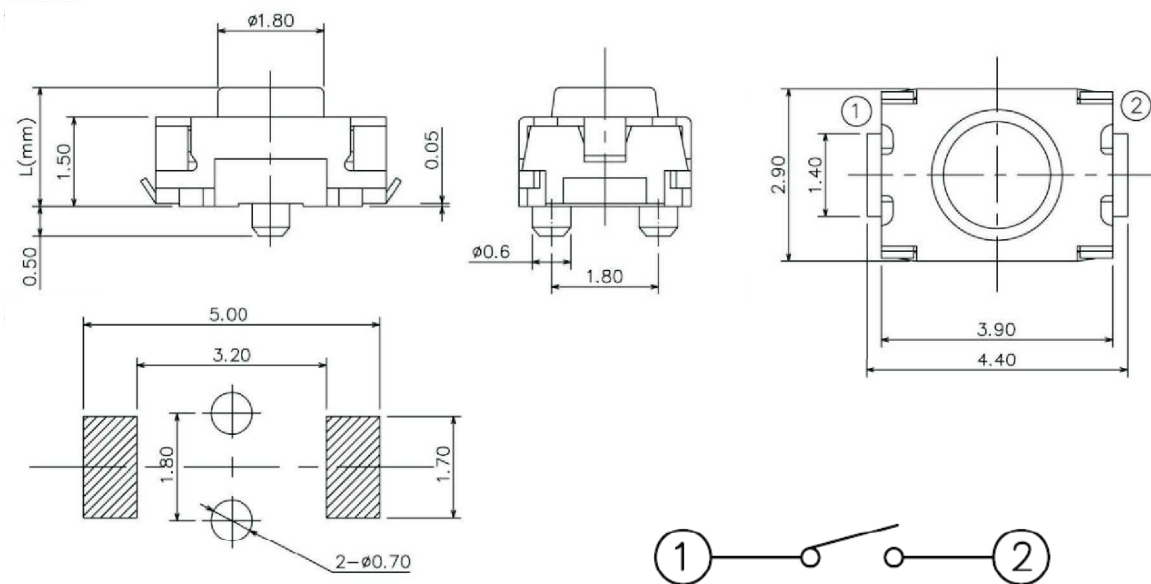

Mounting Holes

Contact Configuration