


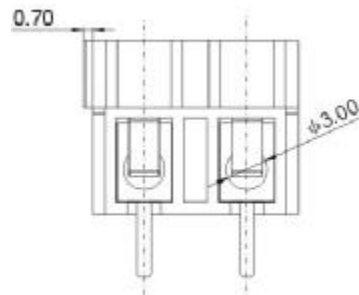





DEGSON ELECTRONICS CO., LTD.

Product Specification

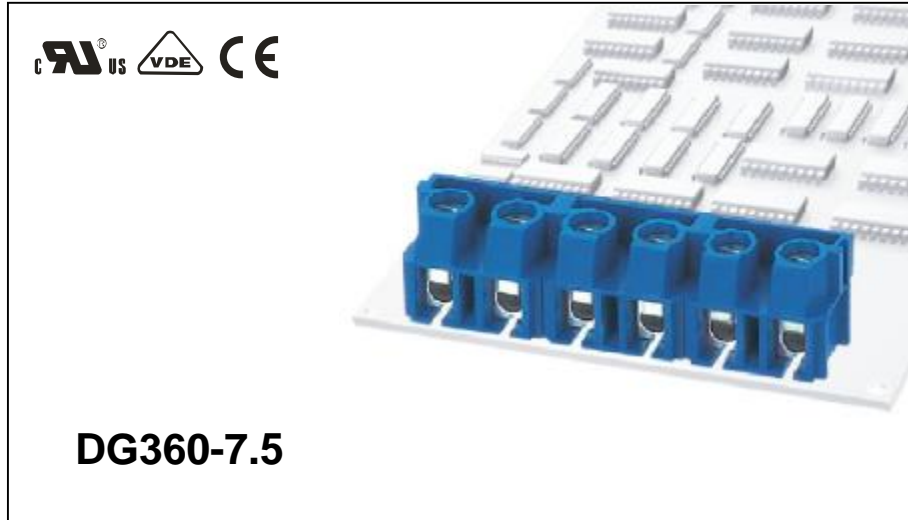

| | | |
|----------------------|--------------------------------------|--------------------|
| APPROVAL | | |
| Electrical | | |
| Standard | UL | IEC |
| Rated voltage | 300V | 450V |
| Rated current | 15A | 24A |
| Wire range | 22-14AWG | 2.5mm ² |
| Withstanding voltage | AC2500V/1Min | |
| Mechanical | | |
| Torque | 0.5Nm(4.4Lb-In) | |
| Ambient temperature | -30°C~+120 °C | |
| Strip length | 5-6mm | |
| Dimensions | | |
| Pitch | 7.5mm(.295") | |
| Poles | 2P,3P-24P | |
| Material | | |
| Housing | PBT,UL94V-0 | |
| Screws | M3,steel, Cr ³⁺ Zn-plated | |
| Pin header | Brass,Tin plated | |
| Wire guard | Stainless steel | |

HOW TO ORDER :

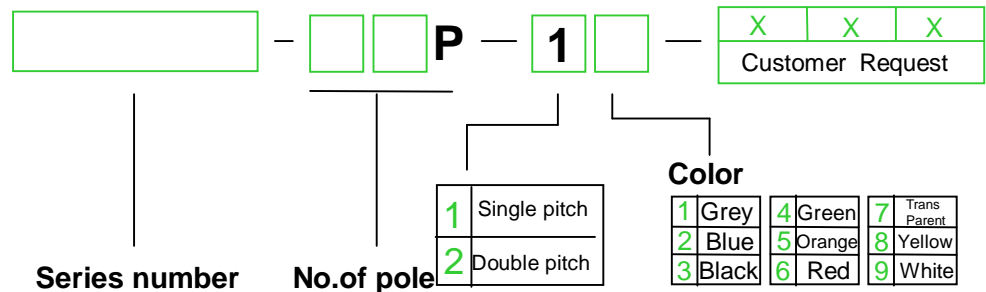

| | |
|------|-------------------------------------|
| | DEGSON ELECTRONICS CO., LTD. |
| NAME | DG360-7.5 |