
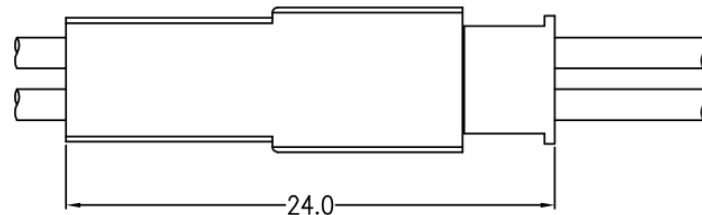
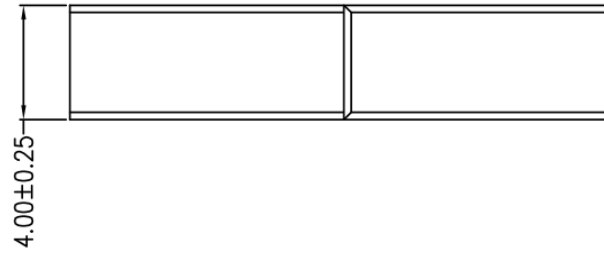
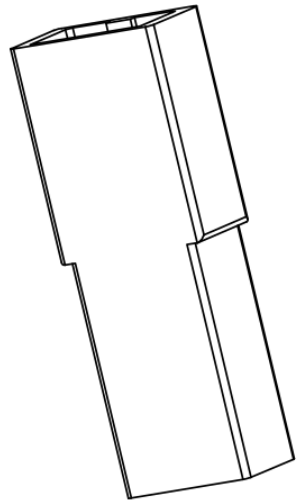
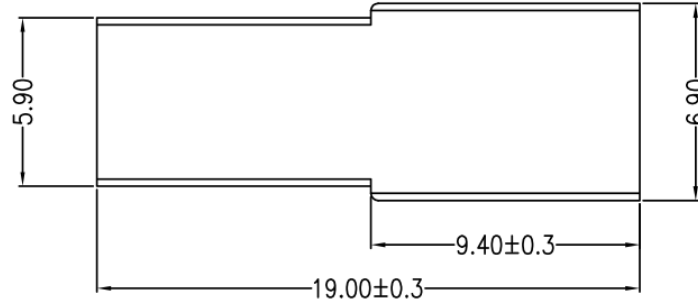


REV	DESCRIPTION	DESIGN	DATE
A0	Release		



Assembly Layout

Main Specifications

Poles : 02
 Contact resistance : $\leq 20\text{m}\Omega$
 Insulation resistance : $\geq 1000\text{M}\Omega$
 Rated voltage : 250V AC DC
 Rated current : 3.0A AC DC
 Withstand Voltage : 1000V AC/minute
 Temperature Range : $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$

C					
B					
A	PEDESTAL		1 PCS	PA66	
ITEM	COMPONENT		Q'TY	MATERIAL	FINISH
LEDsconn					TITLE:
X.±0.5	X.±5'	USE: CUSTOMER		PART NO.:	
.X±0.3	.X±2'	APPD:		DWG NO.:	
.XX±0.25	.XX±1'	CHKD:		SCALE	
--	--	DR:		1 : 1	SHEET
		UNITS: mm			1 / 1