

# A

# 17051-DA

Ø172x51mm(Ø6.8"x2")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-20°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	AC Induction Capacitor Motor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	920 g
ROHS COMPLIANCE	Yes
OPTIONAL FUNCTION	FG, RD
IP LEVEL	IP54 (Special IP Rating On Request)

# 172mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17051V1H-DA	115	0.28/0.24	27/27	2800/3300	0.66/0.78	17.0/20.0	240/285	6.8/8.06	55/61
A17051V1M-DA	115	0.25/0.23	27/27	2650/3050	0.55/0.61	14.0/15.5	210/250	5.9/7.0	53/59
A17051V2H-DA	230	0.11/0.12	24/27	2800/3300	0.66/0.78	17.0/20.0	240/285	6.8/8.06	55/61
A17051V2M-DA	230	0.11/0.11	26/26	2650/3050	0.55/0.61	14.0/15.5	210/250	5.9/7.0	53/59

## DIMENSION

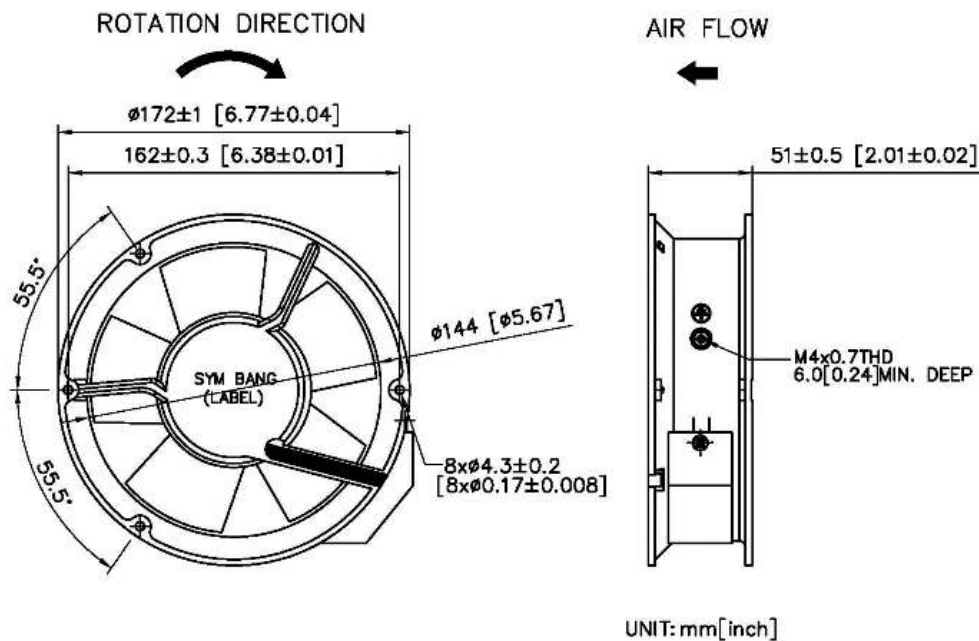

SYMBANG

# AIR PERFORMANCE

