

# A

# 17238-C

172x151x38mm(6.8"x5.9"x1.5")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	100 VAC to 120 VAC for 115V Type 200 VAC to 240 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M $\Omega$ min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
SAFETY	Impedance Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	740 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

# 172 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17238V1HB-C	110	0.58/0.47	43/36	2580/2880	0.45/0.35	11.4/8.9	160/185	4.57/5.29	49
A17238V2HB-C	230	0.32/0.25	48/39	2580/2880	0.45/0.35	11.4/8.9	160/185	4.57/5.29	49

## DIMENSION

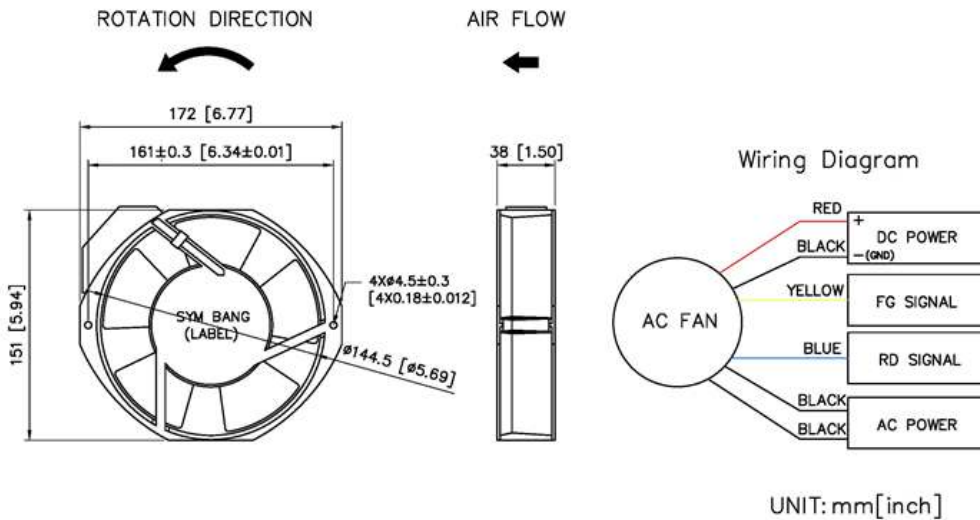

SYMBANG

# AIR PERFORMANCE

