

# A

# 17251A

172X151X51mm(6.8"X5.9"X2")



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	1050 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)


# 172

 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17251V1HA	115	0.62/0.55	50.3/45.1	2600/2850	0.43/0.41	11/10.3	187/189	5.3/5.3	50
A17251V1MA	115	0.33/0.33	28.0/27.9	2400/2000	0.51/0.55	13/14	159/148	4.5/4.2	40
A17251V1LA	115	0.29/0.29	25.9/25.0	2170/1300	0.40/0.31	10/8	113/100	3.2/2.9	32
A17251V2HA	230	0.32/0.27	52.0/46.0	2600/2850	0.43/0.41	11/10.3	187/189	5.3/5.3	50
A17251V2MA	230	0.18/0.18	28.8/28.5	2400/2200	0.51/0.55	13/14	159/148	4.5/4.2	40
A17251V2LA	230	0.14/0.13	23.1/21.3	2170/1300	0.40/0.31	10/8	113/100	3.2/2.9	32

## DIMENSION

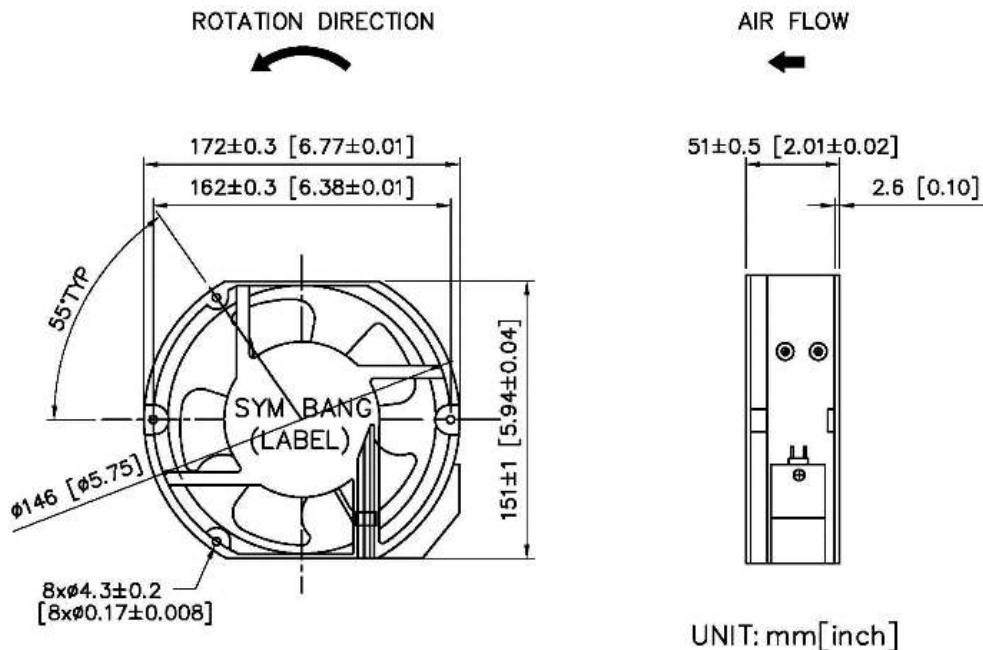

SYMBANG

# AIR PERFORMANCE

