

# A

# 17251DVA

172x151x51mm(6.8"x5.9"x2")



HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Shaded Pole Motor
SAFETY	Thermally Protected
TERMINATION	Lead Wire
WEIGHT	1050 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)


# 172

 mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17251DVHBLA	115	0.62/0.55	50.3/45.1	2600/2850	0.43/0.41	11/10.3	187/189	5.3/5.3	50
A17251DVHBLA	230	0.32/0.27	52.0/46.0	2600/2850	0.43/0.41	11/10.3	187/189	5.3/5.3	50

## DIMENSION

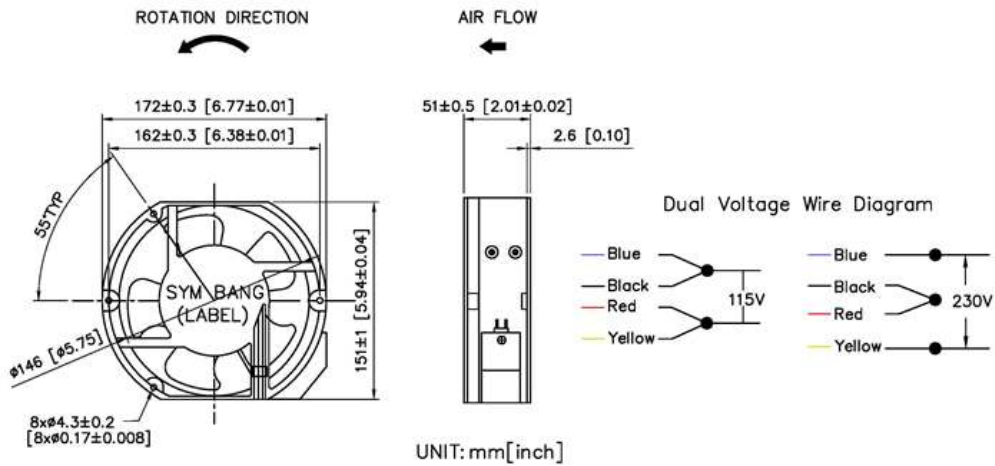

SYMBANG

# AIR PERFORMANCE

