

A

17251M

172x151x51mm(6.8"x5.9"x2")



| | |
|-------------------------|---|
| HOUSING | Aluminum Die Casting, Painted Black |
| IMPELLER | Metal |
| BEARING | Ball |
| OPERATING TEMPERATURE | -10°C to + 70°C |
| INSULATION | Class A |
| OPERATING VOLTAGE RANGE | 85 VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type |
| DIELECTRIC STRENGTH | 5mA Max. at 1500 VAC for 1 second |
| INSULATION RESISTANCE | 10M Ω min. @500 VDC |
| MOTOR TYPE | Outer Rotor, AC Induction Capacitor Motor |
| SAFETY | Thermally Protected |
| TERMINATION | Terminals or Lead Wire |
| WEIGHT | 940 g |
| ROHS COMPLIANCE | Yes |
| IP LEVEL | IP21(Special IP Rating On Request) |


172

mm

SPECIFICATION

| MODEL NO. | RATED VOLTAGE(V) | RATED CURRENT(A) | INPUT POWER(W) | SPEED (RPM) | MAX. AIR PRESSURE | | MAX. AIR FLOW | | NOISE dB(A) @1M |
|-------------|------------------|------------------|----------------|-------------|-------------------|-----------|---------------|-----------|-----------------|
| | | | | | inchH2O | mmH2O | CFM | m3/min | |
| A17251V1SBM | 115 | 0.27/0.23 | 26/26 | 2800/3300 | 0.64/0.78 | 16.5/20.0 | 220/260 | 6.20/7.35 | 55/61 |
| A17251V1HBM | 115 | 0.25/0.21 | 27/25 | 2700/3100 | 0.55/0.61 | 14/15.5 | 210/250 | 5.94/7.07 | 53/59 |
| A17251V2SBM | 230 | 0.10/0.11 | 23/26 | 2800/3300 | 0.64/0.78 | 16.5/20.0 | 220/260 | 6.20/7.35 | 55/61 |
| A17251V2HBM | 230 | 0.11/0.12 | 26/27 | 2700/3100 | 0.55/0.61 | 14/15.5 | 210/250 | 5.94/7.07 | 53/59 |
| A17251V3HBM | 380 | 0.06/0.06 | 22/23 | 2600/3000 | 0.47/0.43 | 12/11 | 200/230 | 5.66/6.51 | 53/59 |

DIMENSION

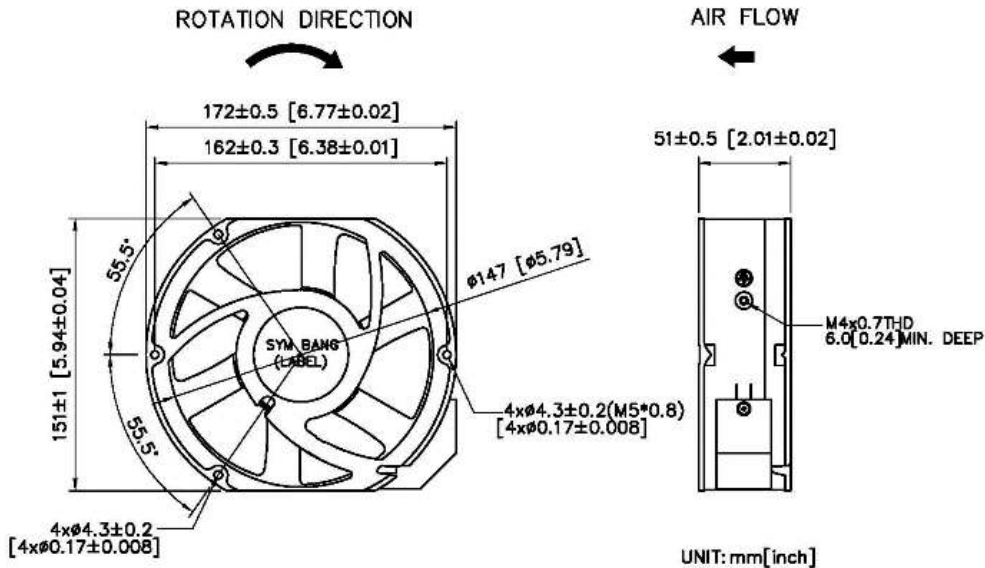

SYMBANG

AIR PERFORMANCE

