

# A

# 17251-JS

172x151x51mm(6.8"x5.9"x2")




HOUSING	Aluminum Die Casting, Painted Black
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-20°C to + 80°C
INSULATION	Class A
OPERATING VOLTAGE RANGE	85VAC to 125 VAC for 115V Type 185 VAC to 245 VAC for 230V Type
DIELECTRIC STRENGTH	5mA Max. at 1500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
MOTOR TYPE	Outer Rotor, AC Induction Capacitor Motor
SAFETY	Thermally Protected
TERMINATION	Terminals or Lead Wire
WEIGHT	900 g
ROHS COMPLIANCE	Yes
IP LEVEL	IP21(Special IP Rating On Request)

# 172mm

## SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A17251V2-JS	230	0.23/0.22	26/25	2750/3250	0.57/0.72	14.5/18.5	215/250	6.08/7.07	52/57
A17251V1-JS	115	0.12/0.11	26/25	2750/3250	0.57/0.72	14.5/18.5	215/250	6.08/7.07	52/57

## DIMENSION

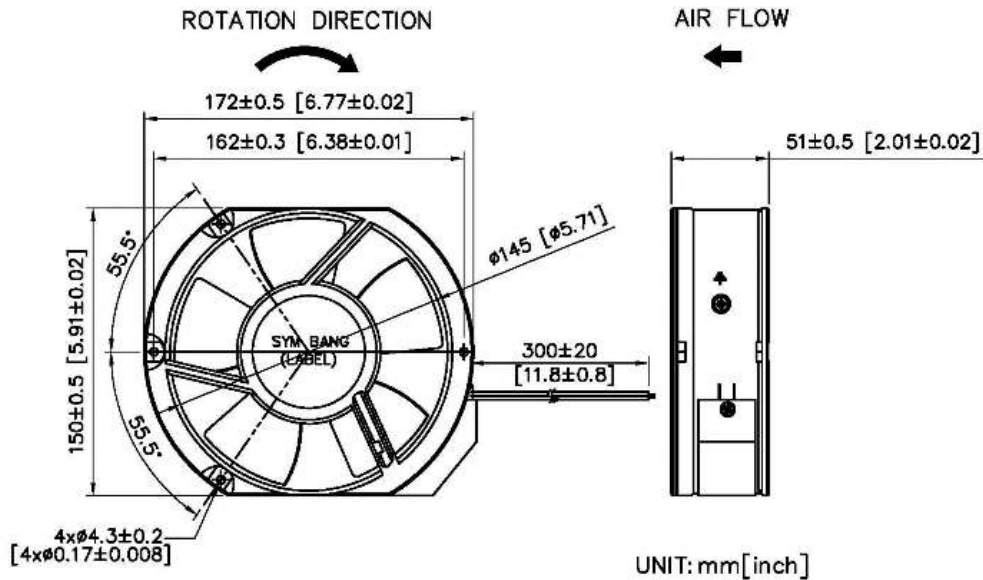

SYMBANG

# AIR PERFORMANCE

