


A

20060-TJ

200x200x60 mm(7.87"x7.87"x2.36")

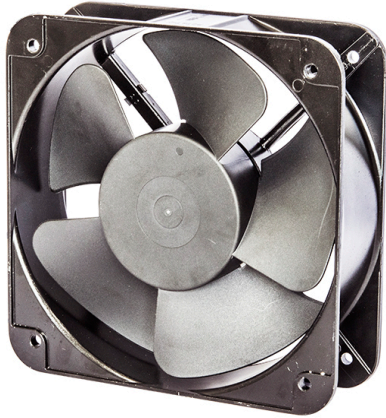

HOUSING	Aluminum
IMPELLER	Thermoplastic PBT, UL94V-0
BEARING	Ball
OPERATING TEMPERATURE	-10°C to + 70°C
INSULATION	Class A
TERMINATION	Lead Wire
DIELECTRIC STRENGTH	5mA Max. at 500 VAC for 1 second
INSULATION RESISTANCE	10M Ω min. @500 VDC
SAFETY	Impedance Protected
WEIGHT	1.7 kgs
ROHS COMPLIANCE	Yes
IP LEVEL	IP21 (Special IP Rating On Request)


200

mm

SPECIFICATION

MODEL NO.	RATED VOLTAGE(V)	RATED CURRENT(A)	INPUT POWER(W)	SPEED (RPM)	MAX. AIR PRESSURE		MAX. AIR FLOW		NOISE dB(A) @1M
					inchH2O	mmH2O	CFM	m3/min	
A20060V3HB-TJ	380	0.16	45	2500	0.20	5.0	325	9.2	59
A20060V2HB-TJ	220	0.30	48	2500	0.20	5.0	325	9.2	59
A20060V1HB-TJ	110	0.69	56	2500	0.20	5.0	325	9.2	59

DIMENSION

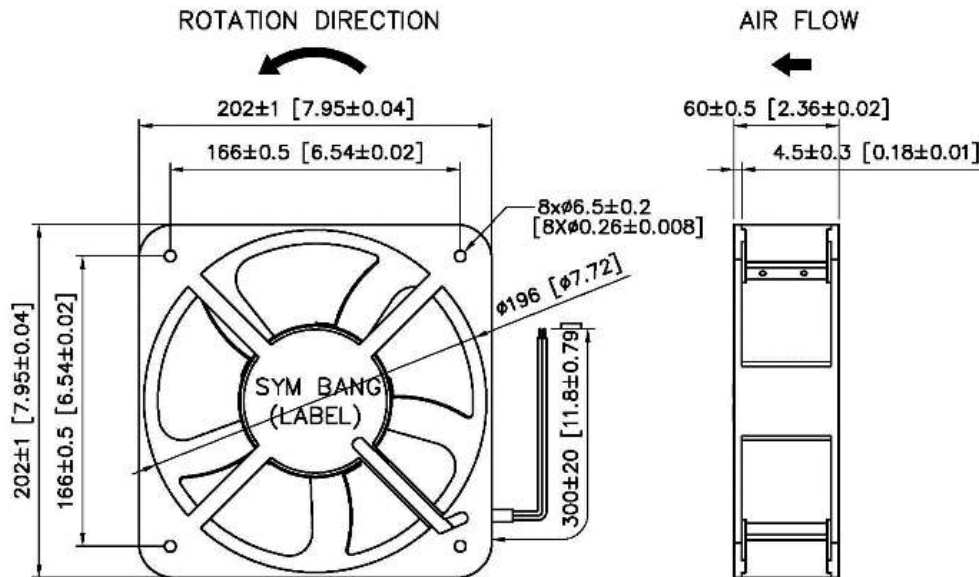

UNIT: mm[inch]

AIR PERFORMANCE

