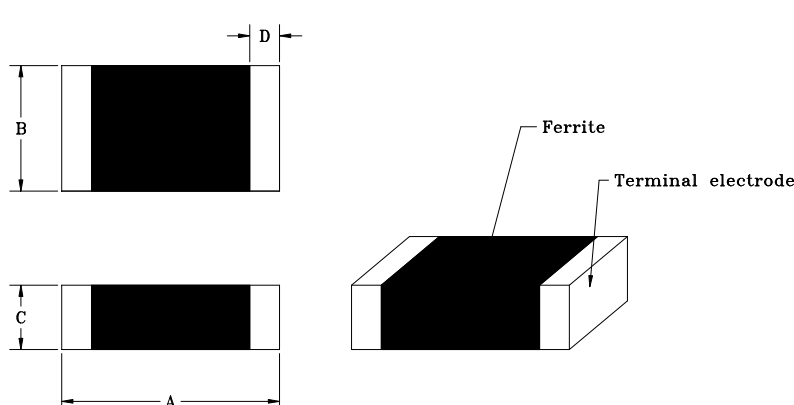


SPECIFICATION FOR APPROVAL

COMMODITY	CHIP BEAD	SPEC NO.	SP-060925002
ITEM	JCB 160808A-121/2 Green	版本：A	表單編號：TRR-002

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	1.6	±0.2
	B	0.8	±0.2
	C	0.8	±0.2
	D	0.3	±0.2
	E		
	F		
	G		
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.
IMPEDANCE	120 ± 25% Ω
TEST FREQUENCY	100 MHz
RDC	0.05 (max) Ω
IDC	2000 (max) mA
	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.


REMARK :

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

COMMODITY :	CHIP BEAD	SPEC NO :	SP-060925002
Type :	JCB 160808A-121/2	版本 : A	表單編號 : TRR-004

Typical Impedance v.s. Frequency Curve

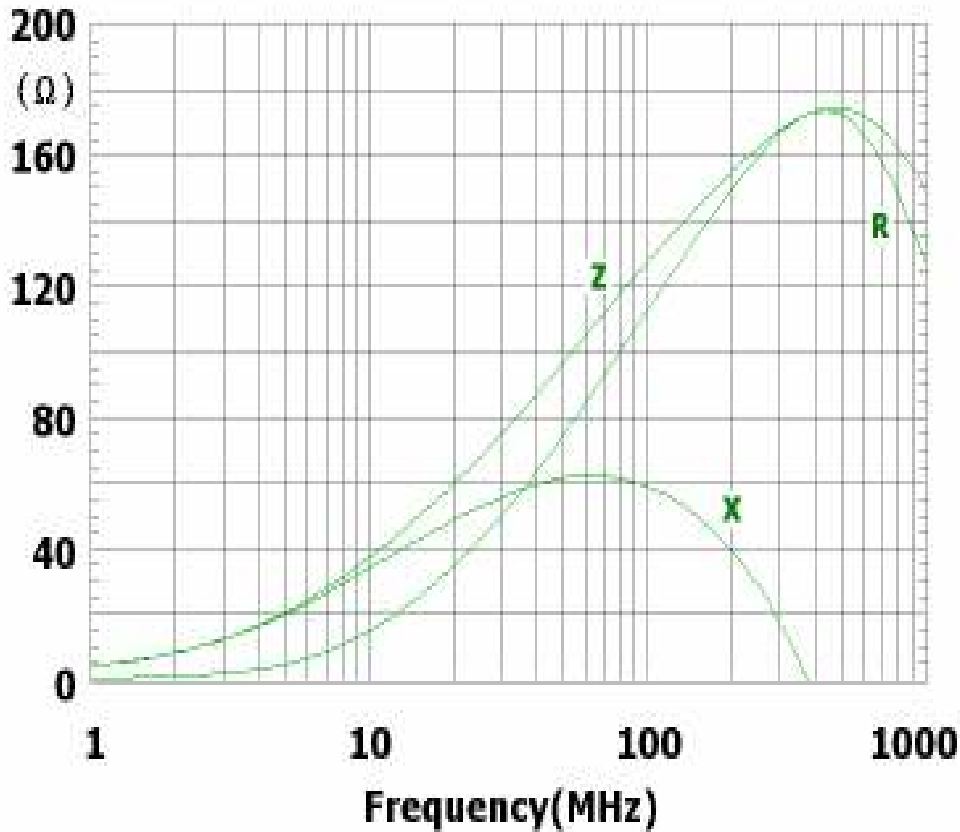

Test Instrument :

HP-4286A RF L.C.R. Meter.

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :



JANTEK

JANTEK ELECTRONICS CO.,LTD

TEL : 886-2-2689-4971 FAX : 886-2-2689-4260

E-mail : jantek@jantek-elec.com.tw

Web-Site : www.jantek-elec.com.tw