

Type: QXG600


2 / 11



The front of horizontal type



The back of horizontal type

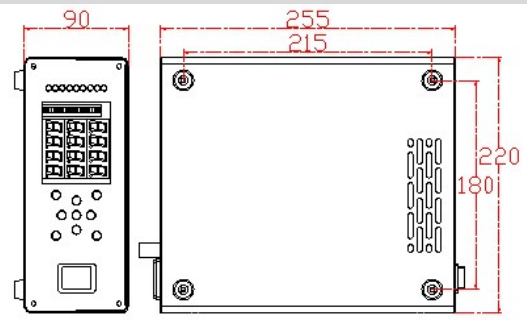


Horizontal Type
Generator Size: 255*220*90mm
Foot Size: 215*180mm



The front of vertical type



The back of vertical type

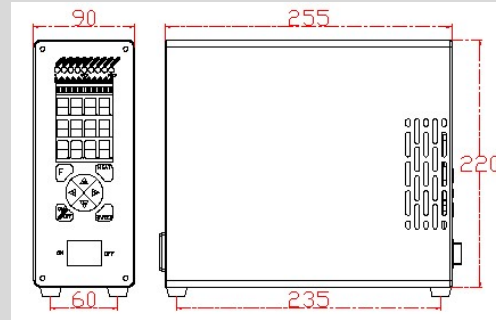

Vertical Type
Generator Size: 255*90*220mm
Foot Size: 235*60mm

Specification :

Type	QXG600- I	QXG600- II
Ultrasonic Power	100-300W	400-600W
Frequency	25-135KHZ	25-135KHZ
Output Current MAX	1.2A	2.5A Max
Power Adjustment	0-100%	
Timer	0-9999S Adjustment	
Remote Control	Remote Control Ultrasonic ON/OFF Contact signal control mode	
Working Voltage	AC220V ±10% 50HZ (or AC110)	
Size	255*220*90mm Horizontal type 255*90*220mm Vertical type	
Weight	3.0KG	

Connection Port :

AC220V or AC 110 Power Supply	European standard / American standard plugs
Ultrasonic Output	JK48-5P Terminal
Signal Control	JK48-5P Terminal

Optional Features :

Matching Models	Function Introduction	Signal Port
QXG600-T	RS485 communication, modbusRTU protocol	16-3P
QXG600-2F	Multi-frequency function, matching multi-frequency load (transducer) work	16-2P
QXG600-H	The anti-noise function effectively relieves wheezing	NO
QXG600-J	Fault alarm, relay normally closed contact output	16-2P