


General Description

These N+P dual Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

BVDSS	RDSON	ID
20V	40mΩ	3.8A
-20V	100mΩ	-2.5A

DFN2X2 Dual 2EP Pin Configuration

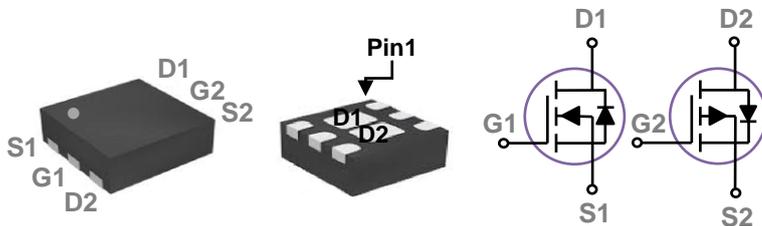

Features

- Fast switching
- Green Device Available
- Suit for 1.8V Gate Drive Applications

Applications

- Notebook
- Load Switch
- Networking
- Hand-held Instruments

Absolute Maximum Ratings Tc=25°C unless otherwise noted

Symbol	Parameter	Rating		Units
V _{DS}	Drain-Source Voltage	20	-20	V
V _{GS}	Gate-Source Voltage	±10	±10	V
I _D	Drain Current – Continuous (T _C =25°C)	3.8	-2.5	A
	Drain Current – Continuous (T _C =100°C)	2.3	-1.5	A
I _{DM}	Drain Current – Pulsed ¹	15.2	-10	A
P _D	Power Dissipation (T _C =25°C)	1.25	1.25	W
	Power Dissipation – Derate above 25°C	0.01	0.01	W/°C
T _{STG}	Storage Temperature Range	-55 to 150	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	-55 to 150	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction to Ambient	---	100	°C/W
R _{θJC}	Thermal Resistance Junction to Case	---	15	°C/W

N-CH Electrical Characteristics (T_J=25 °C, unless otherwise noted)
Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	20	---	---	V
ΔBV _{DSS} /ΔT _J	BV _{DSS} Temperature Coefficient	Reference to 25°C , I _D =1mA	---	0.02	---	V/°C
I _{DSS}	Drain-Source Leakage Current	V _{DS} =20V , V _{GS} =0V , T _J =25°C	---	---	1	uA
		V _{DS} =16V , V _{GS} =0V , T _J =125°C	---	---	10	uA
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±10V , V _{DS} =0V	---	---	±100	nA

On Characteristics

R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =4.5V , I _D =3A	---	30	40	mΩ
		V _{GS} =2.5V , I _D =2A	---	42	55	mΩ
		V _{GS} =1.8V , I _D =1.5A	---	55	70	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =250uA	0.3	0.6	1	V
ΔV _{GS(th)}	V _{GS(th)} Temperature Coefficient		---	-2	---	mV/°C
g _{fs}	Forward Transconductance	V _{DS} =10V , I _D =2A	---	4.4	---	S

Dynamic and switching Characteristics

Q _g	Total Gate Charge ^{2, 3}	V _{DS} =10V , V _{GS} =4.5V , I _D =3A	---	5.8	10	nC
Q _{gs}	Gate-Source Charge ^{2, 3}		---	0.6	1.5	
Q _{gd}	Gate-Drain Charge ^{2, 3}		---	1.5	3	
T _{d(on)}	Turn-On Delay Time ^{2, 3}	V _{DD} =10V , V _{GS} =4.5V , R _G =25Ω I _D =1A	---	2.9	6	ns
T _r	Rise Time ^{2, 3}		---	8.4	16	
T _{d(off)}	Turn-Off Delay Time ^{2, 3}		---	19.2	38	
T _f	Fall Time ^{2, 3}		---	5.6	12	
C _{iss}	Input Capacitance	V _{DS} =15V , V _{GS} =0V , F=1MHz	---	315	600	pF
C _{oss}	Output Capacitance		---	50	80	
C _{rss}	Reverse Transfer Capacitance		---	40	60	

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _S	Continuous Source Current	V _G =V _D =0V , Force Current	---	---	3.8	A
I _{SM}	Pulsed Source Current		---	---	7.6	A
V _{SD}	Diode Forward Voltage	V _{GS} =0V , I _S =1A , T _J =25°C	---	---	1	V

Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. The data tested by pulsed , pulse width ≤ 300us , duty cycle ≤ 2%.
3. Essentially independent of operating temperature.

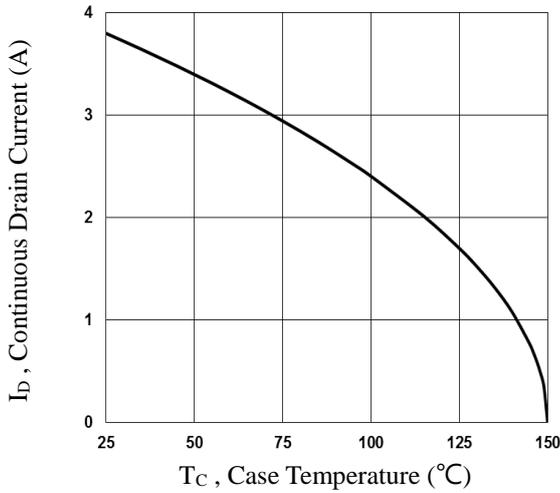


Fig.1 Continuous Drain Current vs. T_c

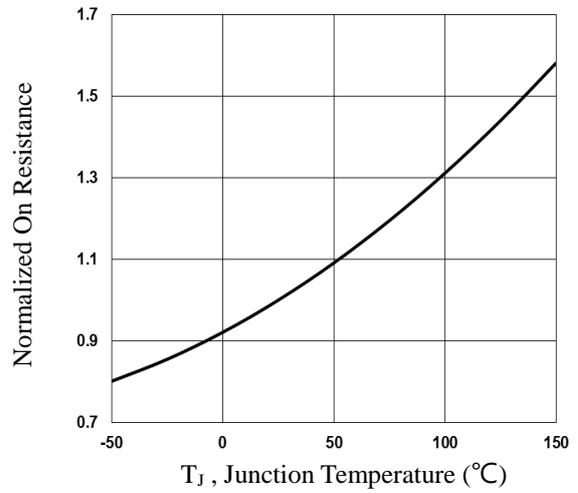


Fig.2 Normalized $R_{DS(on)}$ vs. T_j

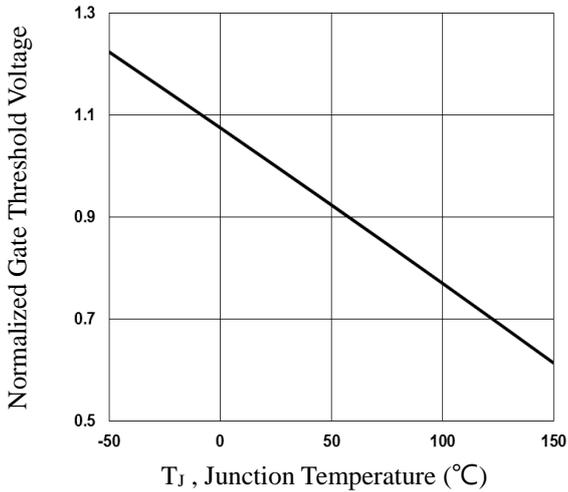


Fig.3 Normalized V_{th} vs. T_j

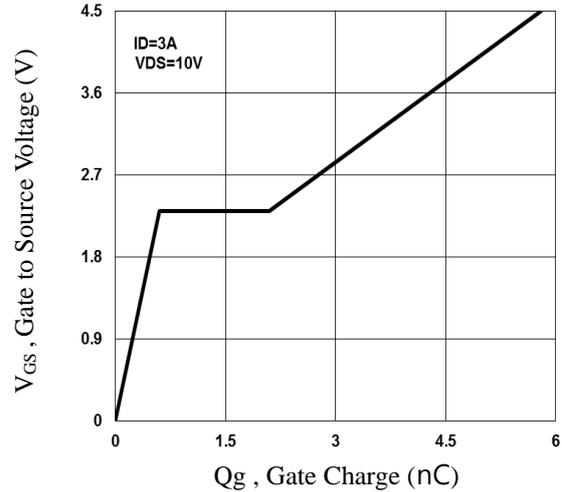


Fig.4 Gate Charge Waveform

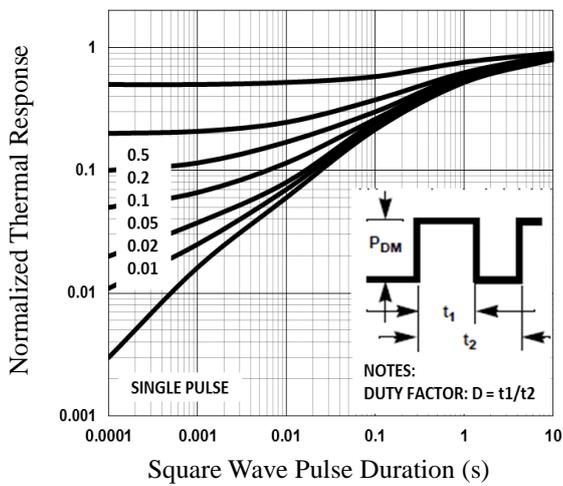


Fig.5 Normalized Transient Impedance

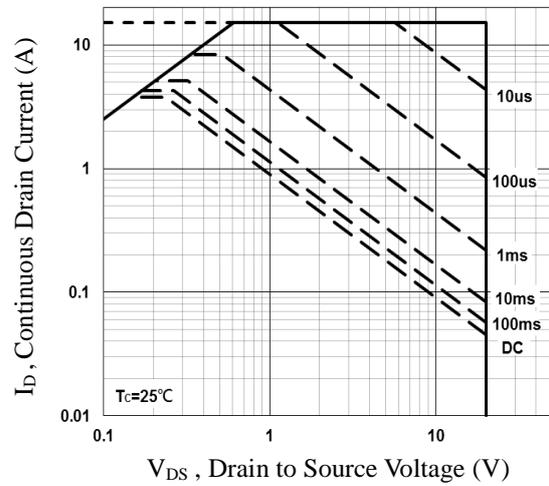


Fig.6 Maximum Safe Operation Area

P-CH Electrical Characteristics (T_J=25 °C, unless otherwise noted)
Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250uA	-20	---	---	V
ΔBV _{DSS} /ΔT _J	BV _{DSS} Temperature Coefficient	Reference to 25°C, I _D =-1mA	---	-0.01	---	V/°C
I _{DSS}	Drain-Source Leakage Current	V _{DS} =-20V, V _{GS} =0V, T _J =25°C	---	---	-1	uA
		V _{DS} =-16V, V _{GS} =0V, T _J =125°C	---	---	-10	uA
I _{GSS}	Gate-Source Leakage Current	V _{GS} =±10V, V _{DS} =0V	---	---	±100	nA

On Characteristics

R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =-4.5V, I _D =-3A	---	82	100	mΩ
		V _{GS} =-2.5V, I _D =-2A	---	125	140	mΩ
		V _{GS} =-1.8V, I _D =-1A	---	197	230	mΩ
V _{GS(th)}	Gate Threshold Voltage	V _{GS} =V _{DS} , I _D =-250uA	-0.3	-0.6	-1.0	V
ΔV _{GS(th)}	V _{GS(th)} Temperature Coefficient		---	3	---	mV/°C
g _{fs}	Forward Transconductance	V _{DS} =-10V, I _D =-1A	---	2.2	---	S

Dynamic and switching Characteristics

Q _g	Total Gate Charge ^{4, 5}	V _{DS} =-10V, V _{GS} =-4.5V, I _D =-2A	---	4.8	10	nC
Q _{gs}	Gate-Source Charge ^{4, 5}		---	0.5	1	
Q _{gd}	Gate-Drain Charge ^{4, 5}		---	1.9	4	
T _{d(on)}	Turn-On Delay Time ^{4, 5}	V _{DD} =-10V, V _{GS} =-4.5V, R _G =25Ω I _D =-1A	---	3.5	7	ns
T _r	Rise Time ^{4, 5}		---	12.6	24	
T _{d(off)}	Turn-Off Delay Time ^{4, 5}		---	32.6	62	
T _f	Fall Time ^{4, 5}		---	8.4	16	
C _{iss}	Input Capacitance	V _{DS} =-15V, V _{GS} =0V, F=1MHz	---	350	510	pF
C _{oss}	Output Capacitance		---	65	95	
C _{rss}	Reverse Transfer Capacitance		---	50	75	

Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I _S	Continuous Source Current	V _G =V _D =0V, Force Current	---	---	-2.5	A
I _{SM}	Pulsed Source Current		---	---	-5	A
V _{SD}	Diode Forward Voltage	V _{GS} =0V, I _S =-1A, T _J =25°C	---	---	-1	V

Note :

4. The data tested by pulsed, pulse width ≤ 300us, duty cycle ≤ 2%.
5. Essentially independent of operating temperature.

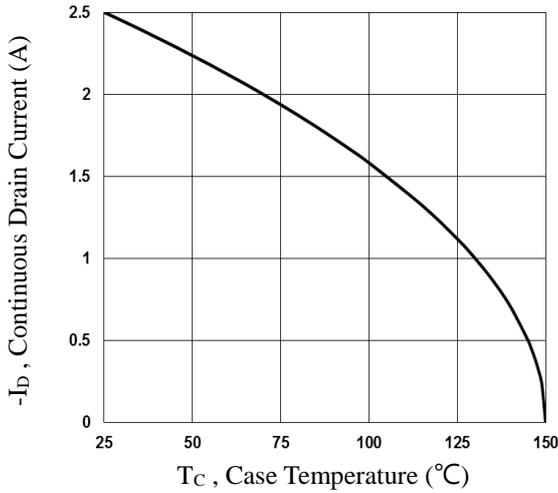


Fig.7 Continuous Drain Current vs. T_c

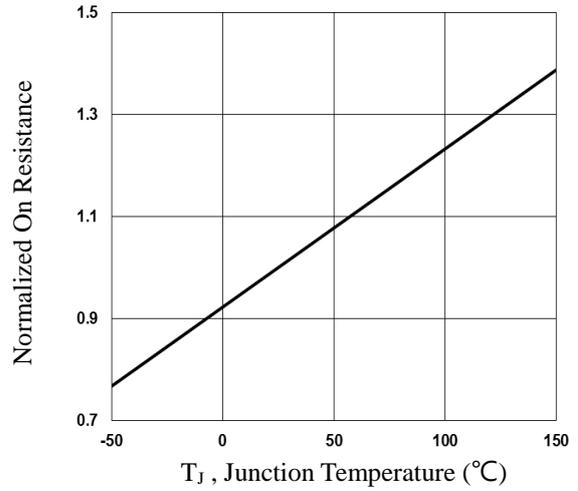


Fig.8 Normalized $R_{DS(on)}$ vs. T_j

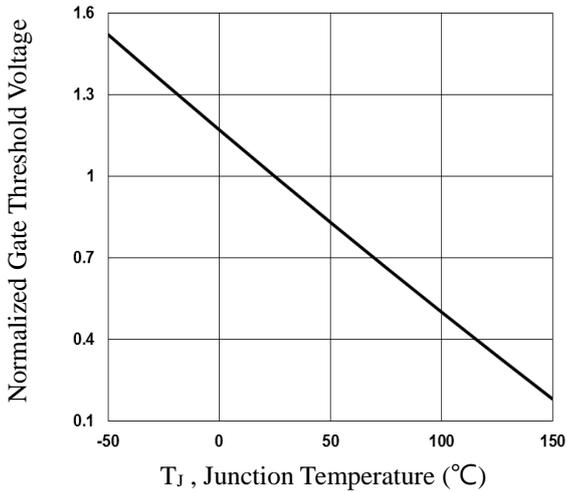


Fig.9 Normalized V_{th} vs. T_j

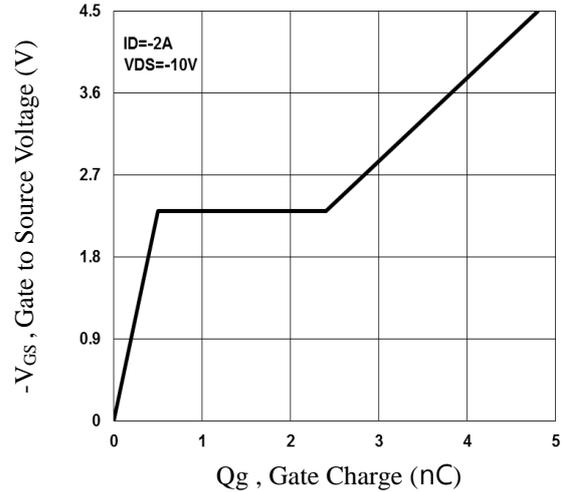


Fig.10 Gate Charge Waveform

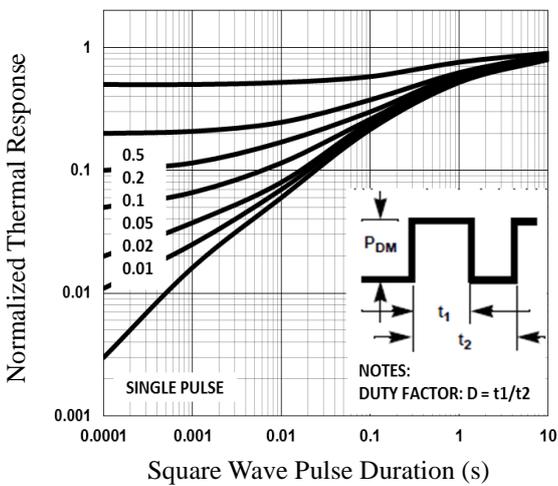


Fig.11 Normalized Transient Impedance




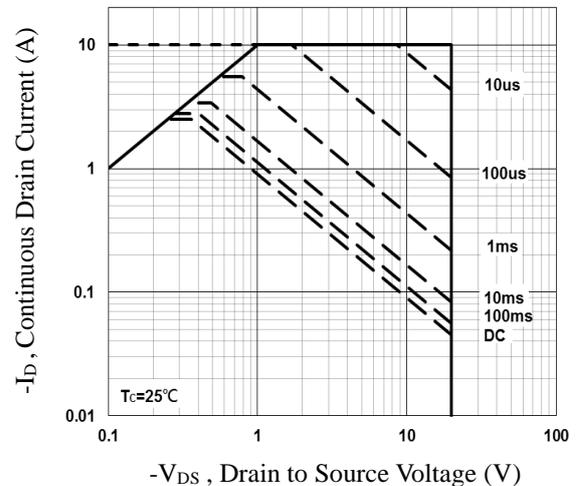


Fig.12 Maximum Safe Operation Area

PPAK2X2 Dual 2EP PACKAGE INFORMATION

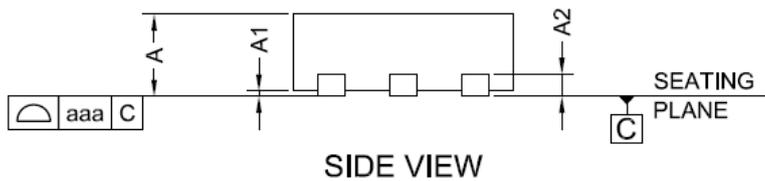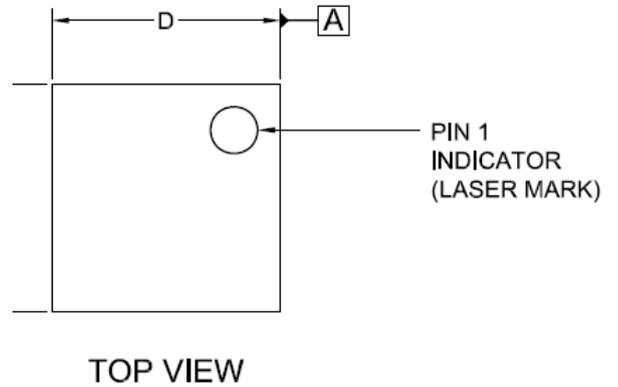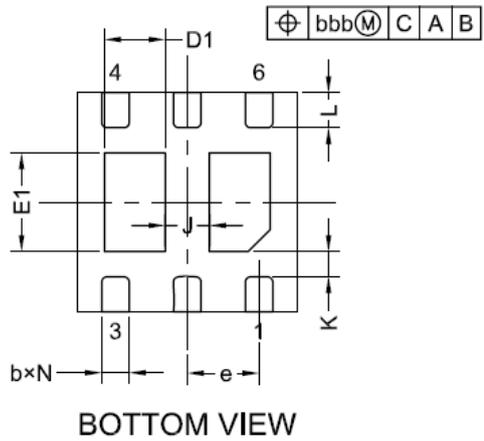

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	TYP	MAX
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A2	0.203		
b	0.20	0.25	0.30
D	1.95	2.00	2.05
D1	0.50	0.55	0.60
E	1.95	2.00	2.05
E1	0.85	0.90	0.95
e	0.65BSC		
L	0.27	0.32	0.37
J	0.40BSC		
K	0.20MIN		
N	6		
aaa	0.08		
bbb	0.10		