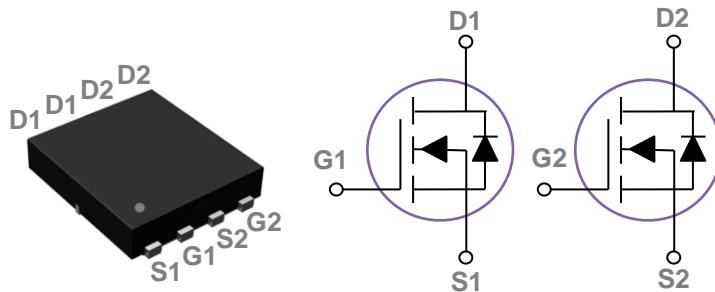


General Description

These N-Channel enhancement mode power field effect transistors are using trench DMOS technology. This advanced technology has been especially tailored to minimize on-state resistance, provide superior switching performance, and withstand high energy pulse in the avalanche and commutation mode. These devices are well suited for high efficiency fast switching applications.

PPAK5x6 Dual Pin Configuration



BVDSS	RDS(ON)	ID
100V	24mΩ	25A

Features

- 100V,25A, RDS(ON) =24mΩ @VGS = 10V
- Improved dv/dt capability
- Fast switching
- 100% EAS Guaranteed
- Green Device Available

Applications

- Networking
- Load Switch
- LED applications

Absolute Maximum Ratings $T_c=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	100	V
V _{Gs}	Gate-Source Voltage	±20	V
I _D	Drain Current – Continuous ($T_c=25^\circ\text{C}$)	25	A
	Drain Current – Continuous ($T_c=100^\circ\text{C}$)	15.8	A
I _{DM}	Drain Current – Pulsed ¹	100	A
EAS	Single Pulse Avalanche Energy ²	51	mJ
I _{AS}	Single Pulse Avalanche Current ²	32	A
P _D	Power Dissipation ($T_c=25^\circ\text{C}$)	50	W
	Power Dissipation – Derate above 25°C	0.4	W/°C
T _{STG}	Storage Temperature Range	-55 to 150	°C
T _J	Operating Junction Temperature Range	-55 to 150	°C

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Unit
R _{θJA}	Thermal Resistance Junction to ambient	---	62	°C/W
R _{θJC}	Thermal Resistance Junction to Case	---	2.48	°C/W

Electrical Characteristics ($T_J=25\text{ }^{\circ}\text{C}$, unless otherwise noted)
Off Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0\text{V}$, $I_D=250\mu\text{A}$	100	---	---	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=80\text{V}$, $V_{GS}=0\text{V}$, $T_J=25\text{ }^{\circ}\text{C}$	---	---	1	μA
		$V_{DS}=80\text{V}$, $V_{GS}=0\text{V}$, $T_J=85\text{ }^{\circ}\text{C}$	---	---	10	μA
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20\text{V}$, $V_{DS}=0\text{V}$	---	---	± 100	nA

On Characteristics

$R_{DS(\text{ON})}$	Static Drain-Source On-Resistance	$V_{GS}=10\text{V}$, $I_D=14\text{A}$	---	20	24	$\text{m}\Omega$
		$V_{GS}=4.5\text{V}$, $I_D=10\text{A}$	---	27	35	$\text{m}\Omega$
$V_{GS(\text{th})}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D = 250\mu\text{A}$	1.2	1.6	2.5	V
g_{fs}	Forward Transconductance	$V_{DS}=10\text{V}$, $I_D=3\text{A}$	---	9	---	S

Dynamic and switching Characteristics

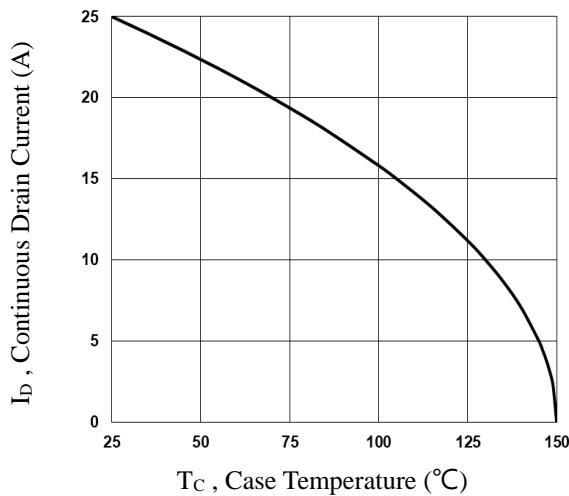
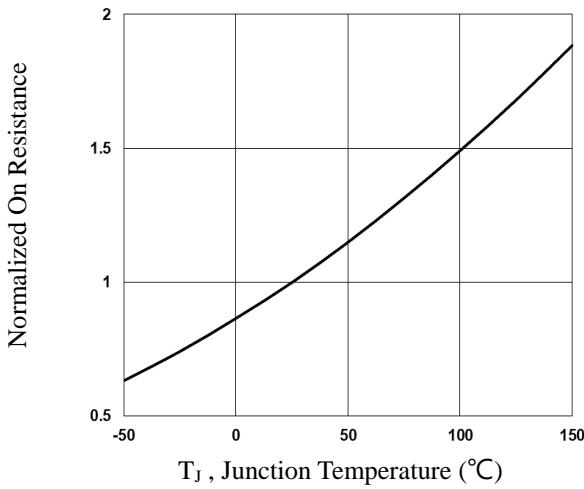
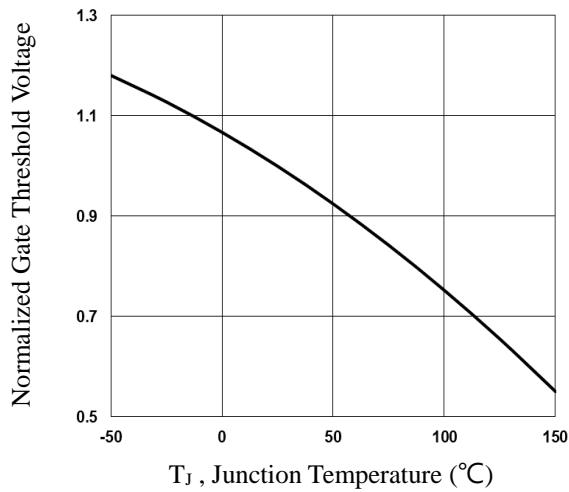
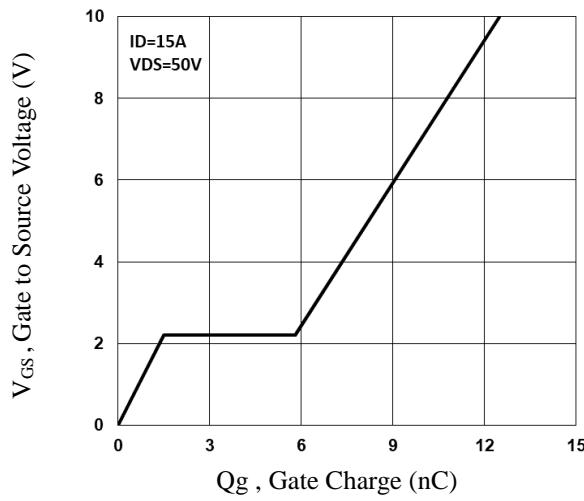
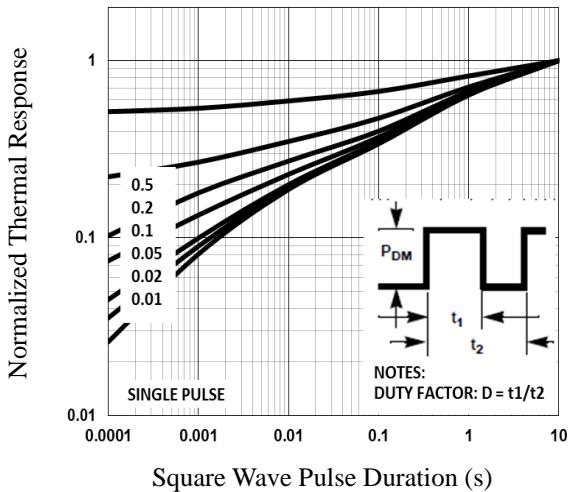
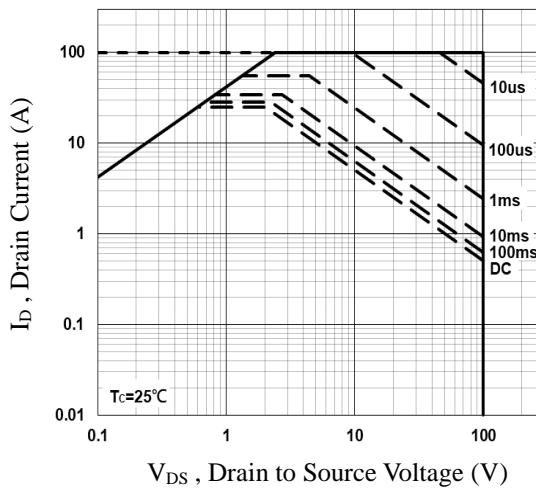
Q_g	Total Gate Charge ^{3, 4}	$V_{DS}=50\text{V}$, $V_{GS}=10\text{V}$, $I_D=15\text{A}$	---	12.5	20	nC
Q_{gs}	Gate-Source Charge ^{3, 4}		---	1.5	3	
Q_{gd}	Gate-Drain Charge ^{3, 4}		---	4.3	6	
$T_{d(on)}$	Turn-On Delay Time ^{3, 4}	$V_{DD}=50\text{V}$, $V_{GS}=10\text{V}$, $R_G=6\Omega$ $I_D=15\text{A}$	---	20	30	ns
T_r	Rise Time ^{3, 4}		---	30	45	
$T_{d(off)}$	Turn-Off Delay Time ^{3, 4}		---	55	70	
T_f	Fall Time ^{3, 4}		---	30	45	
C_{iss}	Input Capacitance	$V_{DS}=50\text{V}$, $V_{GS}=0\text{V}$, $F=1\text{MHz}$	---	690	1030	pF
C_{oss}	Output Capacitance		---	135	220	
C_{rss}	Reverse Transfer Capacitance		---	6	15	
R_g	Gate Resistance	$V_{GS}=0\text{V}$, $V_{DS}=0\text{V}$, $F=1\text{MHz}$	---	0.8	---	Ω

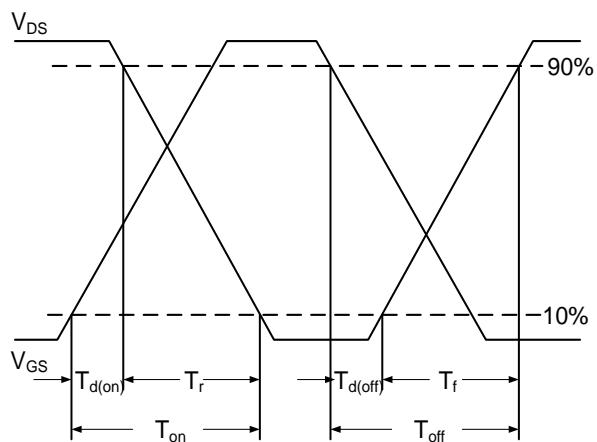
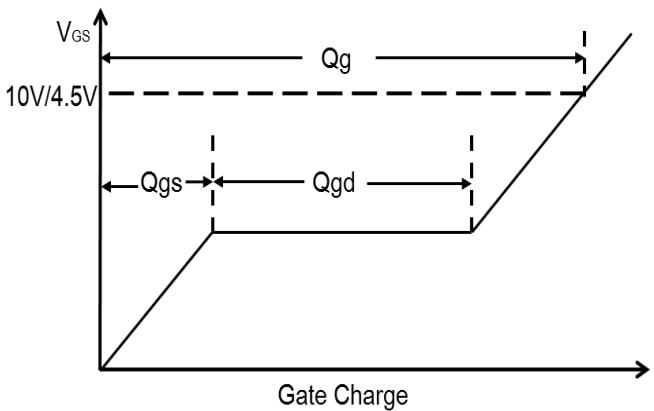
Drain-Source Diode Characteristics and Maximum Ratings

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_s	Continuous Source Current	$V_G=V_D=0\text{V}$, Force Current	---	---	25	A
			---	---	50	A
V_{SD}	Diode Forward Voltage	$V_{GS}=0\text{V}$, $I_s=1\text{A}$, $T_J=25\text{ }^{\circ}\text{C}$	---	---	1	V
t_{rr}	Reverse Recovery Time	$V_R=100\text{V}$, $I_s=10\text{A}$	---	180	---	ns
Q_{rr}	Reverse Recovery Charge	$di/dt=100\text{A}/\mu\text{s}$, $T_J=25\text{ }^{\circ}\text{C}$	---	300	---	nC

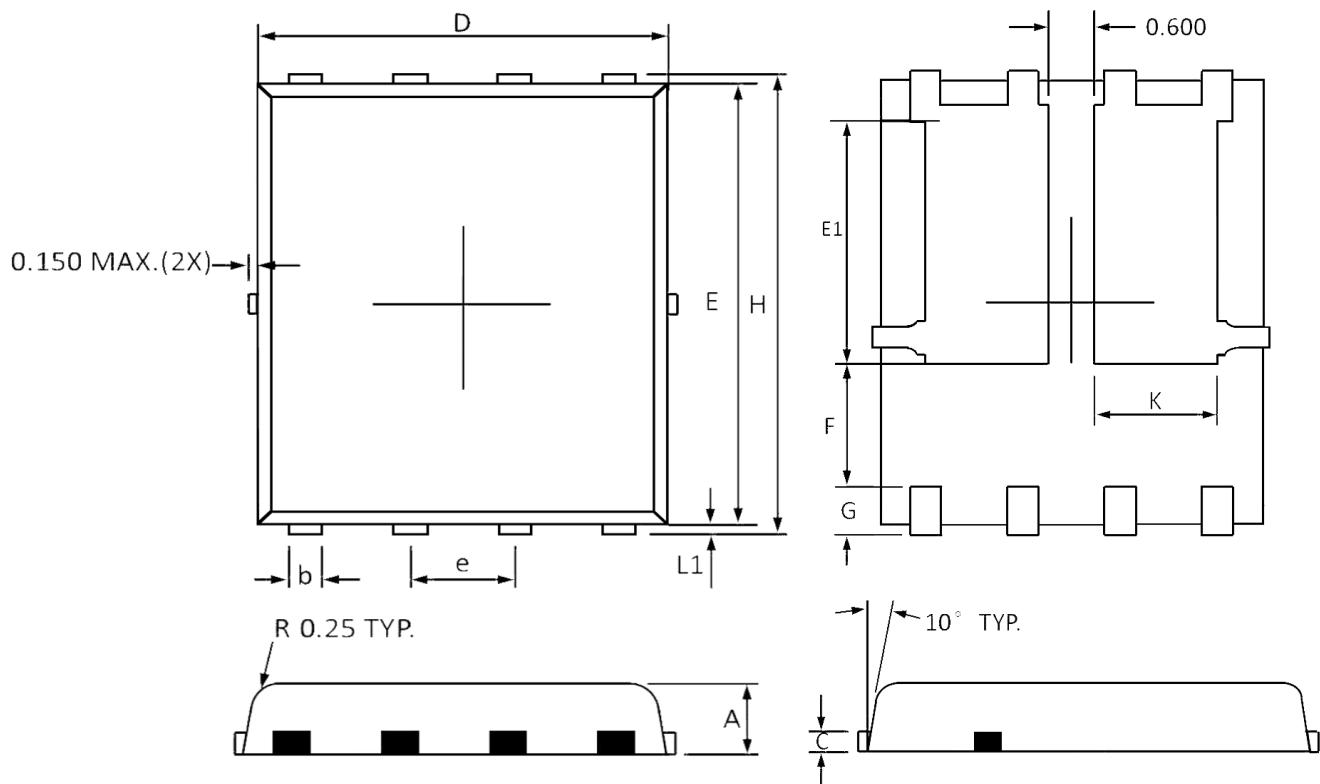
Note :

1. Repetitive Rating : Pulsed width limited by maximum junction temperature.
2. $V_{DD}=50\text{V}$, $L=0.1\text{mH}$, $I_{AS}=32\text{A}$, $R_G=25\Omega$, Starting $T_J=25\text{ }^{\circ}\text{C}$.
3. The data tested by pulsed , pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
4. Essentially independent of operating temperature.


Fig.1 Continuous Drain Current vs. T_c

Fig.2 Normalized R_{DS(on)} vs. T_j

Fig.3 Normalized V_{th} vs. T_j

Fig.4 Gate Charge Characteristics

Fig.5 Normalized Transient Impedance

Fig.6 Maximum Safe Operation Area


Fig.7 Switching Time Waveform

Fig.8 Gate Charge Waveform

PPAK5x6 Dual PACKAGE INFORMATION



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.800	1.200	0.031	0.047
b	0.300	0.510	0.012	0.020
C	0.250 Ref		0.010 Ref	
D	4.800	5.400	0.189	0.213
E	5.450	5.960	0.215	0.235
E1	3.200	3.800	0.126	0.150
e	1.27 BSC		0.050 BSC	
F	1.000	1.900	0.039	0.075
G	0.380	0.800	0.015	0.031
H	5.850	6.300	0.230	0.248
L1	0.050	0.250	0.002	0.010
K	1.500	1.900	0.059	0.074

PPAK5X6 Dual RECOMMENDED LAND PATTERN