
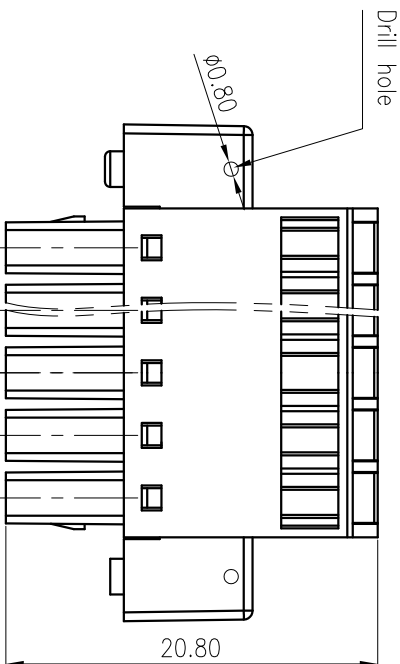
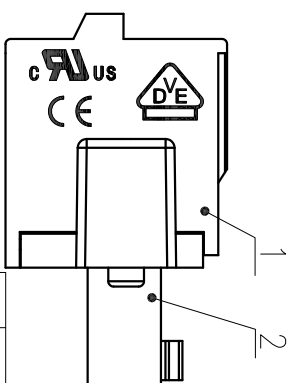
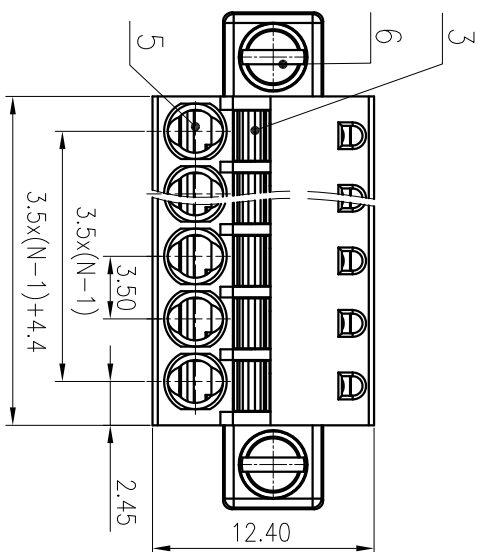
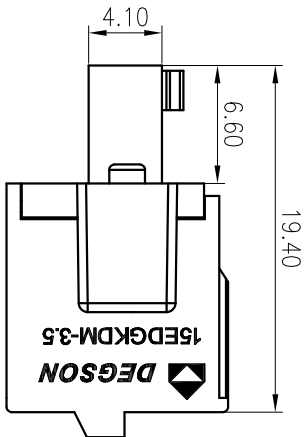


备注公差/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50			±Z

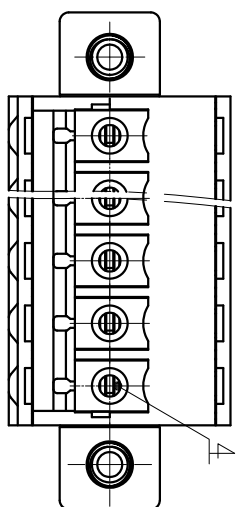

6	Screw	Steel	Zn Plated
5	Spring	Stainless steel	
4	Clamp	Copper alloy	Sn Plated
3	Button	POM	UL94HB
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/8	300/8	300/8
EC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/3
额定电压/电流/Rated Voltage(V)/Current(A)	/	/	250/12
额定脉冲电压(RV)/Rate Impulse Voltage(KV)	/	/	2.5
拧紧扭矩/Torque Tightening(N·m/Lb·in)	M2.5	0.4	3.54
导线范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~1.5	28~16	
间距/Pitch(mm)/导线范围/Poles	3.5	N=02~24P	
剥线长度/Stripping length(mm)		9	
使用温度范围/Operating temperature(°C)		-40~+105	
符合RoHS环保要求/Conform to RoHS		Yes	

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: LIGL 2020.06.17

CHKD: MofEK 2020.06.17

DRT: ZhuWM 2008.07.18

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

15EDGKDM-3.5-XXP-1Y-00A(H)

DRAWING NO.: 15EDGKDM-3.5-C01

REV	ECN	DESCRIPTION	DRT	DATE

SIZE: A4	SCALE: 2.5:1 SHEET 1/1
----------	------------------------