

Cruzo Panel (2x3)

Where elegance meets superior functionality

Key Characteristics:

- No moving parts – completely sealed against the environment
- Enhanced touch activated - operation by hand, gloves or tools
- Switching functions - momentary, toggle, prolonged, continuous, timer and programmable
- Optional Smart Switch technology - self-diagnostic, Wi Fi, Bluetooth and IoT capabilities



Electrical Data

| | |
|-----------------------------|------------|
| Actuation Force | 2-5 N |
| Text | White |
| LEDs | Blue, Red |
| LED Operating Voltage | 12V DC max |
| LED max Current Consumption | 10 mA |


Mechanical Data

| | |
|-------------------|-------------------------------|
| Housing Materials | Aluminium 6061 T651 |
| Front | Glass |
| Connection | Wires 18 AWG, Length 10" |
| Finish | Anodize Color - Natural/Black |

Environmental Data

| | |
|-----------------------|-----------------|
| Operating Temperature | -20°C to +75°C |
| Storage Temperature | - 40°C To +85°C |
| IP Protection | IP68 |

Technical Drawing

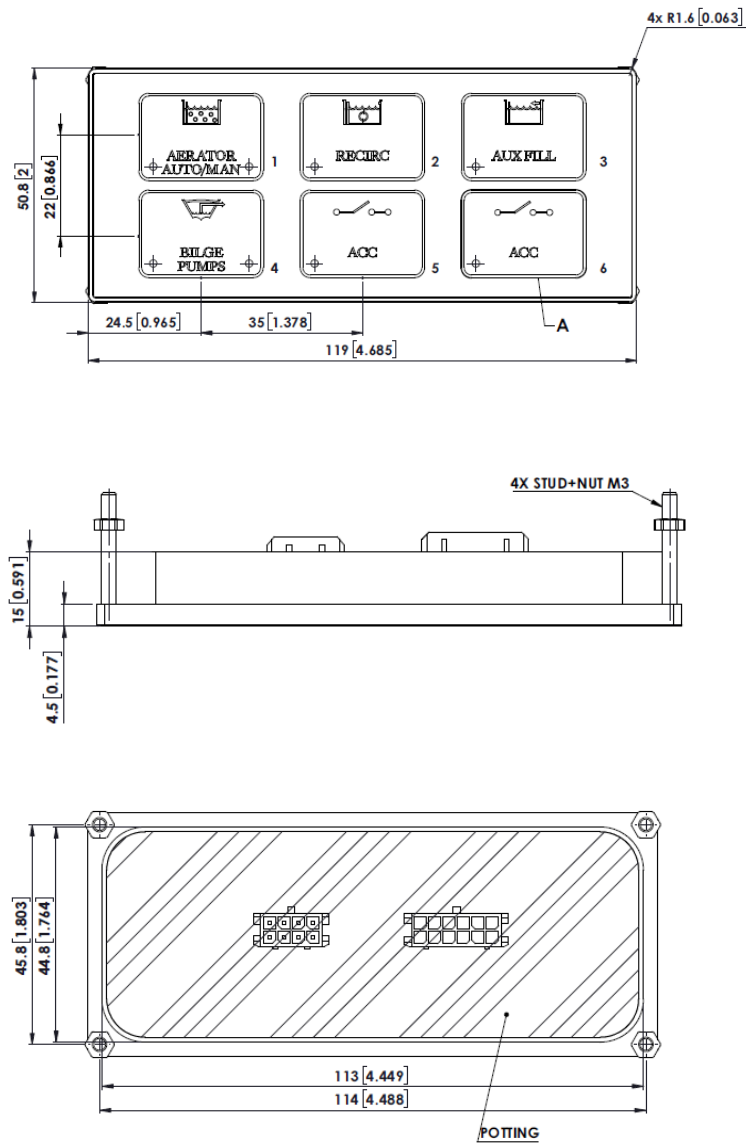

*The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Users should evaluate the suitability and test each product selected for their own applications.