


Six Pack Panel (2x3)

Key Characteristics:

- No moving parts – completely sealed against the environment
- Enhanced touch activated - operation by hand, gloves or tools
- Switching functions - momentary, toggle, prolonged, continuous, timer and programmable
- Optional Smart Switch technology - self-diagnostic, Wi Fi, Bluetooth and IoT capabilities

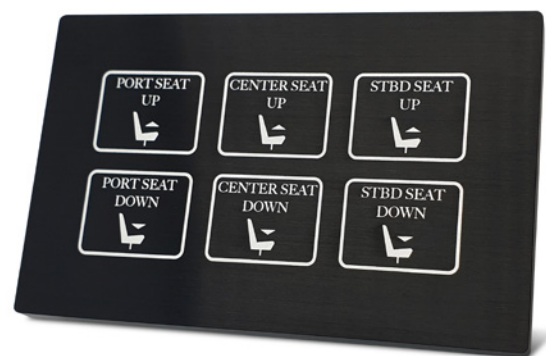

Electrical Data

Actuation Force	3-5 N
Make Impulse Time	125-300 mSec


Mechanical Data

Housing Materials	Aluminium 6061 T651
Connection	DT04-12AP + 4 Wires, Length of 12" 18AWG
Finish	Anodize Color - Natural/Black & Laser Engraving

Environmental Data

Operating Temperature	-20°C to +75°C
Storage Temperature	- 40°C To +85°C
IP Protection	IP69K

Technical Drawing

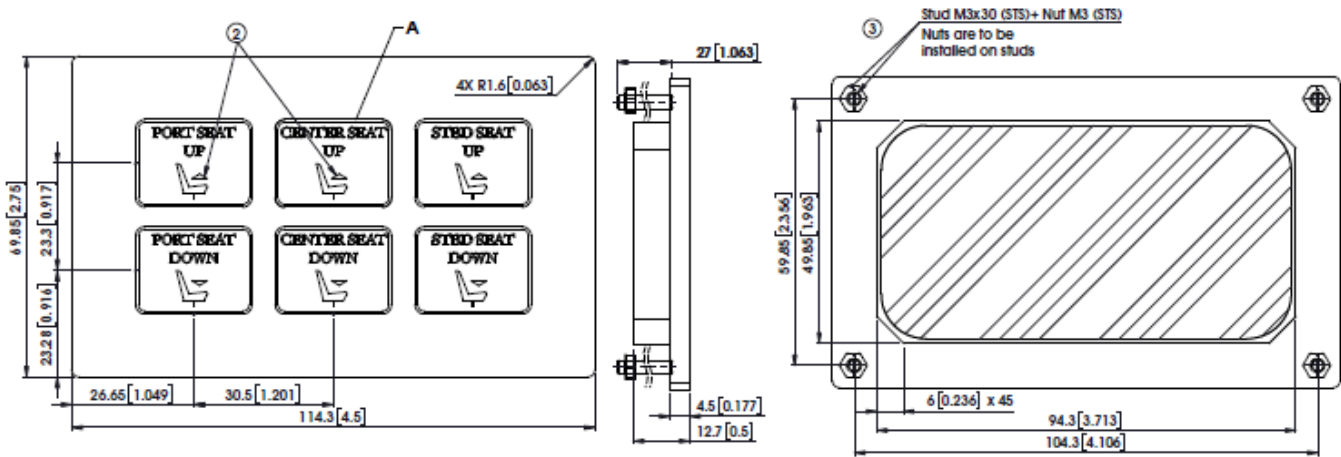

*The specifications, descriptions and illustrations indicated in this document are based on current information. All content is subject to modifications and amendments. Users should evaluate the suitability and test each product selected for their own applications.