



# SPECIFICATION FOR APPROVAL

COMMODITY	<b>COMMON MODE FILTER CHOKE</b>	SPEC NO.	SP-0200601001
ITEM	<b>JSCM 0706-701</b> <span style="border: 1px solid black; padding: 2px;">Green</span>	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	7.0	±0.5
	B	6.0	±0.5
	C	3.8	MAX.
	D	3.5	TYP.
	E	1.5	±0.5
	F	1.5	±0.5
	G	1.7	±0.5

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">IMPEDANCE</td> <td style="width: 20%;">500 (min.)</td> <td style="width: 10%;">Ω</td> </tr> <tr> <td></td> <td>700 (typ.)</td> <td></td> </tr> </table>	IMPEDANCE	500 (min.)	Ω		700 (typ.)		<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
IMPEDANCE	500 (min.)	Ω					
	700 (typ.)						
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>TEST FREQUENCY</td> <td>100</td> <td>MHz</td> </tr> </table>	TEST FREQUENCY	100	MHz				
TEST FREQUENCY	100	MHz					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>RDC (1 line)</td> <td>15</td> <td>(max.) mΩ</td> </tr> </table>	RDC (1 line)	15	(max.) mΩ				
RDC (1 line)	15	(max.) mΩ					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Rated Current</td> <td>4</td> <td>(max.) A</td> </tr> </table>	Rated Current	4	(max.) A				
Rated Current	4	(max.) A					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Rated Volt.</td> <td>80</td> <td>(max) Vdc</td> </tr> </table>	Rated Volt.	80	(max) Vdc				
Rated Volt.	80	(max) Vdc					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>Insulation Resistance</td> <td>10</td> <td>(min) MΩ</td> </tr> </table>	Insulation Resistance	10	(min) MΩ				
Insulation Resistance	10	(min) MΩ					

**REMARK :**


1. Operating temperature range : - 40°C to + 125°C (Including self temp. rise)
2. Storage temperature range : -40~+125°C (on board)
3. Marking : Laser Marking

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN

# TEST REPORT

SPEC NO : SP-0200601001

Typical Impedance v.s. Frequency Curve

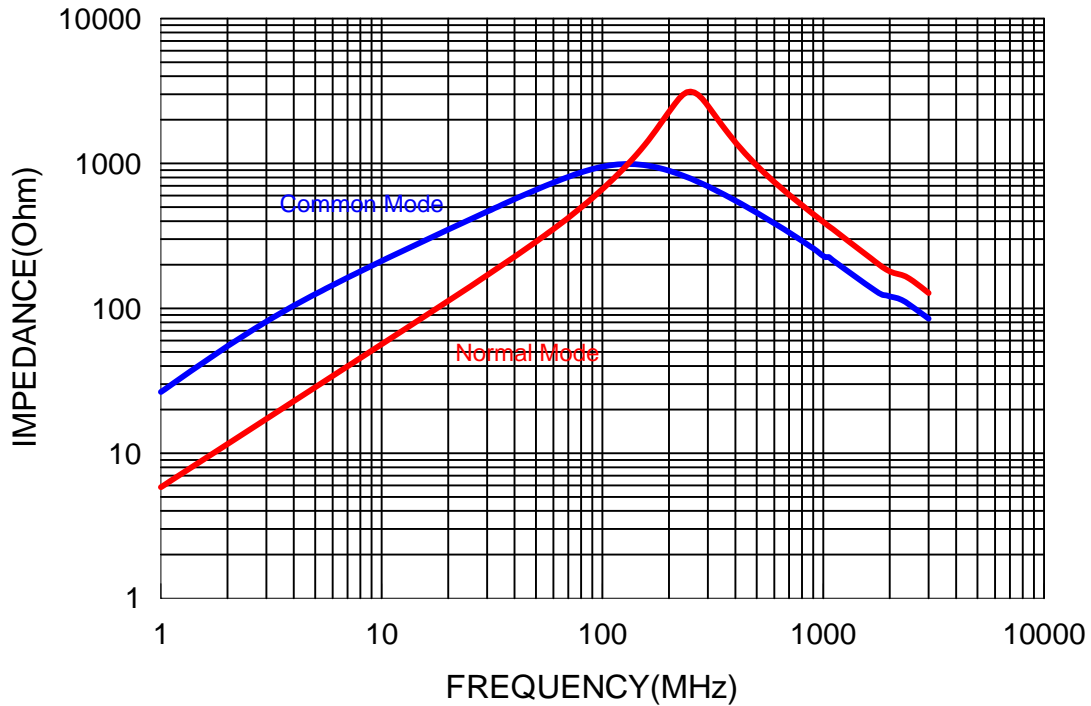

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260  
E-mail : jantek@jantek-elec.com.tw  
Web-Site : www.jantek-elec.com.tw