




ECM-APL2-B

Intel® Apollo Lake 3.5" Micro Module

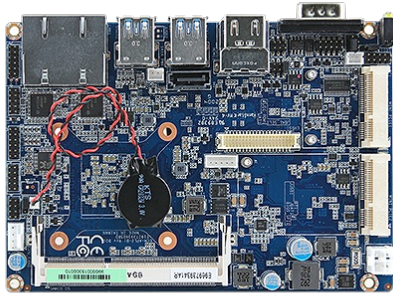

- > Bottom layer soldered
- > Intel® Pentium®/Celeron®/Atom™ BGA Processor
- > Intel® HD Graphics 500/505
- > Single DRAM Socket, Max. Up to 8GB DDR3L 1600&1333MHz
- > Triple Display: Dual HDMI, LVDS
- > Dual mPCIe Expansion Slot
- > Dual Gigabit Ethernet, HD Audio Code
- > TPM 2.0

+ Spec

-System Information-	
Processor	Intel® Celeron® Processor J3455 (2M Cache, up to 2.30 GHz)
System Memory	1 x 204-Pin DDR3L 1600&1333MTs SO-DIMM up to 8GB
I/O Chipset	EC (IT8528VG)
BIOS Information	AMI uEFI BIOS, 128Mbit SPI Flash ROM
Expansion	
Expansion	1 x Full size Mini PCIe Supports mSATA 1 x Half size Mini PCIe
Storage	
Storage	1 x mSATA support from Mini PCIe
I/O	
USB Port	4 x USB 3.1 (Gen1 5Gbps) 2 x USB 2.0
COM Port	1 x RS-232 1 x RS232 (Default)(JCOM2) or 1 x RS422/485 by GPIO (J422_485)
SATA	1 x SATA III
DIO	1 x 8bit GPIO
MIO	1 x LPC 1 x SPI
Other	1 x LVDS 2 x LAN
Display	
Graphic Chipset	Intel® Apollo Lake SoC Processor integrated Gen9 LP graphics
Spec. & Resolution	HDMI: Max. Resolution 3840 x 2160 @ 30Hz LVDS: Max. Resolution 1920 x 1080 @ 60Hz 2 x HDMI (1.4b)
Multiple Display	Triple Display: Dual HDMI, LVDS
LVDS	1 x LVDS
Audio	
Audio Codec	Realtek ALC888S, supports 5.1-CH
Audio Interface	1 x Mic-In 1 x Line-In 1 x Line-Out
Certifications	
Certification Information	CE FCC Class B
Ethernet	
LAN Chipset	2 x Intel® I210AT
Ethernet Interface	10/100/1000 Base-Tx GbE compatible
LAN Port	2 x RJ-45
Mechanical & Environmental	
Operating Temperature	0°C ~ 60°C (32°F ~ 140°F) for N & J series
Storage Temperature	-40°C ~ 75°C (-40°F ~ 167°F)
Operating Humidity	40°C @ 95% Relative Humidity, Non-condensing
Weight	0.041lbs (0.03kg)
Power Requirement	DC in +12V ~ +24V
ACPI	Single Power ATX Support S0, S3, S4, S5 ACPI 5.0 Compliant



Power Mode	AT/ATX
Dimension (L x W)	5.7" x 4" (146mm x 101mm)
Software Support	
OS Information	Win 10 Linux
Ordering Information	
Ordering Information	ECM-APL2-J3455-C4R 3.5" W/F1 J3455/6USB/2COM/2LAN/LVDS/C4 ACC-ECMAPL2-SD-2R Heat spreader for ECM-APL2 NJ series