

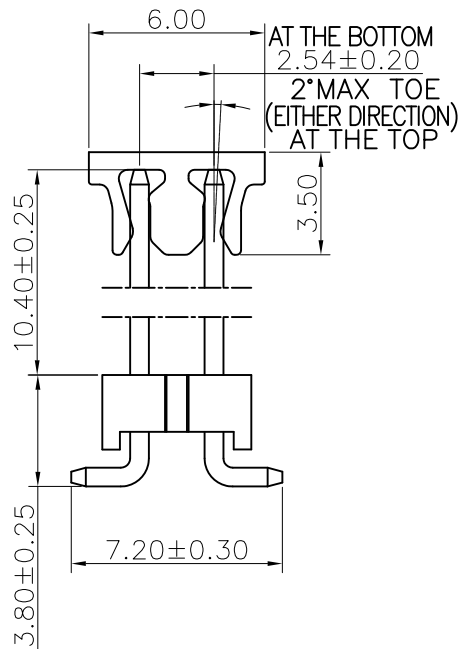
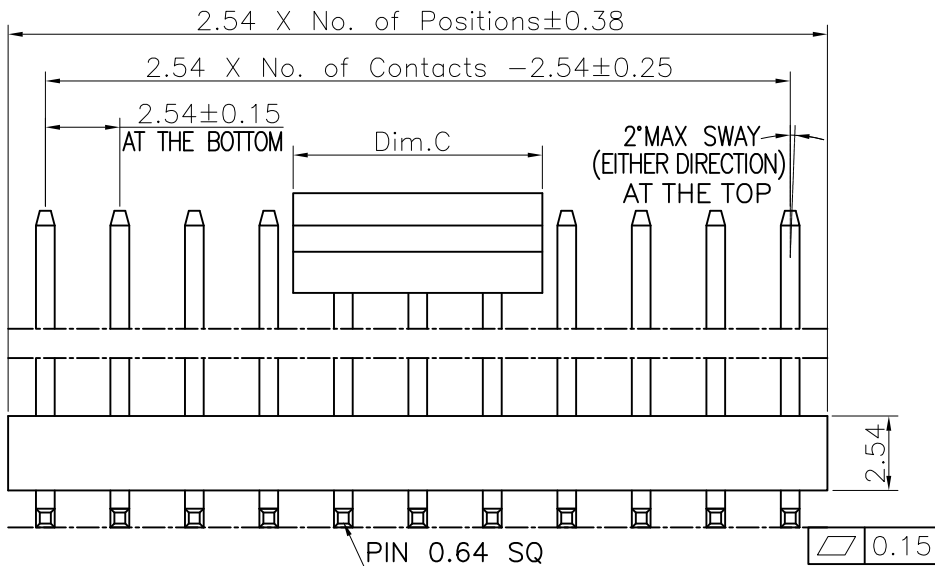


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
A	NEW	INTERIM INITIAL RELEASE.	2020.10.19	何東華

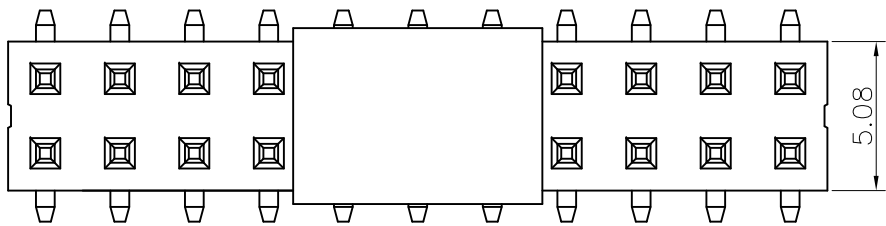

Specifications  
 Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding Voltage: 600VAC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C  
 Materials  
 Contact Material: Brass  
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon (Halogen Free) or the equivalent material  
 All materials must meet Greenconn requirement for environment protection.

Recommended P.C.Board Layout  
 (Tolerance: ±0.05)

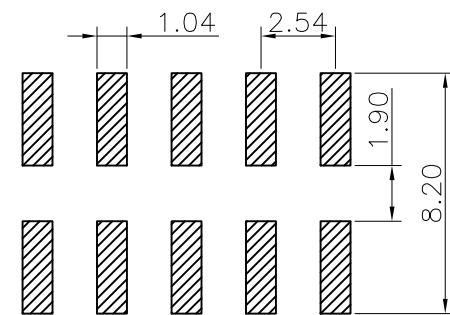

Dim.C	NOTE
5.00	02pins
6.00	03~08pins
8.50	09~40pins

**Ordering Information**

G PHC201 - XX XX A 302 R 1 Z X

No. of Pins per Row 02~40  
 Standard Plating 02=Gold Flash  
 Selective Plating 01=Tin  
 58=Gold 30u"/Tin

Color 1=Black

Standard Packing C=Tube(03~40PIN)  
 Selective Packing A=Box  
 E=CAP+Tube(03~40PIN)  
 F=CAP+Tape&Reel

格稜股份有限公司  
**Greenconn Corporation**

GENERAL TOLERANCE	
X. ±5.0°	X. ±0.30
.X ±3.0°	.X ±0.25
.XX ±2.0°	.XX ±0.15
.XXX ±1.0°	.XXX ±0.10

DESIGNED: 何東華	DATE: 2020.10.19
CHECKED:	DATE:
CO SIGEND: 鐘隆進	DATE: 2020.10.19
APPROVED:	DATE:

DWG. NO.	GPHC201-CA302RZ
PART NO.	GPHC201-XXXX A302R1ZX

TITLE:  
 2.54 PIN HEADER  
 DUAL ROWS SMT TYPE  
 CONNECTOR