

DC FAN

20mm~254mm




DC9238

Size: 92×92×38mm



General Specification

Frame / Impeller: Plastic
 Lead Wire: AWG#24 or
 Equivalent (+)Red, (-)Black
 Ball Bearing 50,000Hrs(40°C)
 Sleeve Bearing 30,000Hrs(40°C)
 Operating temperature: -10°C~+70°C
 Storage temperature: -40°C~+70°C

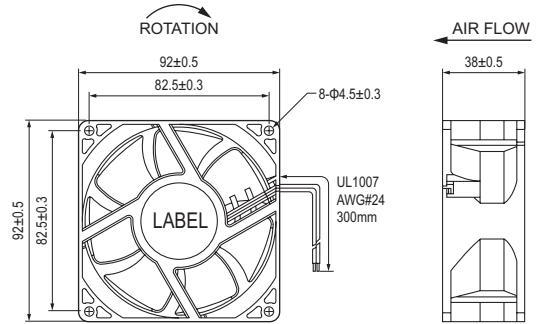

Model Number	# Bearing Type	Rated Voltage (VDC)	Operating Voltage (VDC)	Input Current (A)	Input Power (W)	Speed (RPM)	Max Air Volum		Max Static Pressure		Noise (dB-A)	Weight (g)
							(CFM)	m ³ /min	Inch-H ₂ O	Pa		
DC9238#12U	B	12	7.0~13.8	2.00	24.00	6000	125.10	3.54	0.93	231.35	63.0	245.0
DC9238#12H	B	12	7.0~13.8	1.60	19.20	5000	101.92	2.89	0.82	204.18	55.0	245.0
DC9238#12M	B	12	7.0~13.8	1.30	15.60	4000	83.31	2.36	0.61	151.89	52.0	245.0
DC9238#12L	B	12	7.0~13.8	1.10	13.20	3000	67.23	1.90	0.44	109.56	49.0	245.0
DC9238#24U	B	24	14.0~27.6	1.00	24.00	6000	125.10	3.54	0.93	231.35	63.0	245.0
DC9238#24H	B	24	14.0~27.6	0.80	19.20	5000	101.92	2.89	0.82	204.18	55.0	245.0
DC9238#24M	B	24	14.0~27.6	0.60	14.40	4000	83.31	2.36	0.61	151.89	52.0	245.0
DC9238#24L	B	24	14.0~27.6	0.50	12.00	3000	67.23	1.90	0.44	109.56	49.0	245.0
DC9238#48U	B	48	28.0~56.0	0.50	24.00	6000	125.10	3.54	0.93	231.35	63.0	245.0
DC9238#48H	B	48	28.0~56.0	0.40	19.20	5000	101.92	2.89	0.82	204.18	55.0	245.0
DC9238#48M	B	48	28.0~56.0	0.30	14.40	4000	83.31	2.36	0.61	151.89	52.0	245.0
DC9238#48L	B	48	28.0~56.0	0.25	12.00	3000	67.23	1.90	0.44	109.56	49.0	245.0


DZ9238

Size: 92×92×38mm



General Specification

Frame / Impeller: Plastic
 Lead Wire: AWG#24 or
 Equivalent (+)Red, (-)Black
 Ball Bearing 50,000Hrs(40°C)
 Sleeve Bearing 30,000Hrs(40°C)
 Operating temperature: -10°C~+70°C
 Storage temperature: -40°C~+70°C

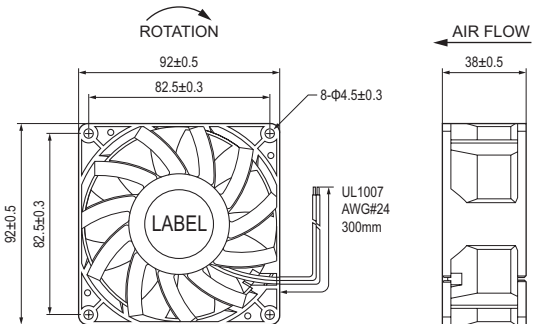

Model Number	# Bearing Type	Rated Voltage (VDC)	Operating Voltage (VDC)	Input Current (A)	Input Power (W)	Speed (RPM)	Max Air Volum		Max Static Pressure		Noise (dB-A)	Weight (g)
							(CFM)	m ³ /min	Inch-H ₂ O	Pa		
DZ9238#12U	B	12	7.0~13.8	2.50	30.00	6000	139.87	3.96	0.96	238.79	61.0	166.0
DZ9238#12H	B	12	7.0~13.8	1.80	21.60	5500	124.56	3.53	0.79	196.23	56.0	166.0
DZ9238#12M	B	12	7.0~13.8	1.20	14.40	5000	115.09	3.26	0.71	176.52	50.0	166.0
DZ9238#12L	B	12	7.0~13.8	0.90	10.80	4500	102.73	2.91	0.58	145.04	45.0	166.0
DZ9238#24U	B	24	14.0~27.6	1.50	38.00	6000	139.87	3.96	0.96	238.79	61.0	166.0
DZ9238#24H	B	24	14.0~27.6	1.00	24.00	5500	124.56	3.53	0.79	196.23	56.0	166.0
DZ9238#24M	B	24	14.0~27.6	0.80	19.20	5000	115.09	3.26	0.71	176.52	50.0	166.0
DZ9238#24L	B	24	14.0~27.6	0.60	14.40	4500	102.73	2.91	0.58	145.04	45.0	166.0
DZ9238#48U	B	48	28.0~56.0	0.80	38.40	6000	139.87	3.96	0.96	238.79	61.0	166.0
DZ9238#48H	B	48	28.0~56.0	0.60	28.80	5500	124.56	3.53	0.79	196.23	56.0	166.0
DZ9238#48M	B	48	28.0~56.0	0.40	19.20	5000	115.09	3.26	0.71	176.52	50.0	166.0
DZ9238#48L	B	48	28.0~56.0	0.30	14.40	4500	102.73	2.91	0.58	145.04	45.0	166.0