
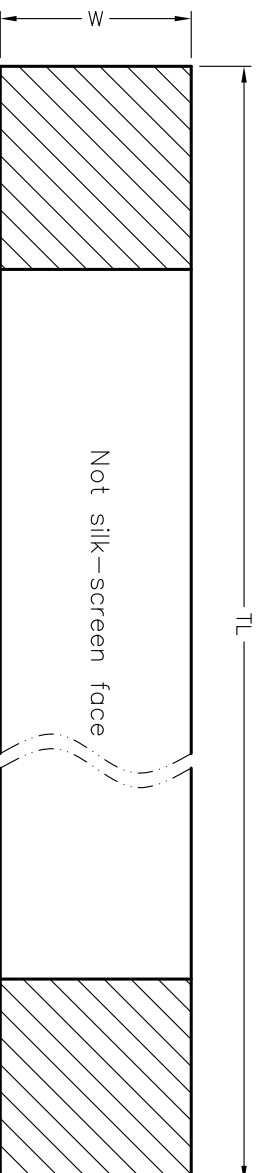
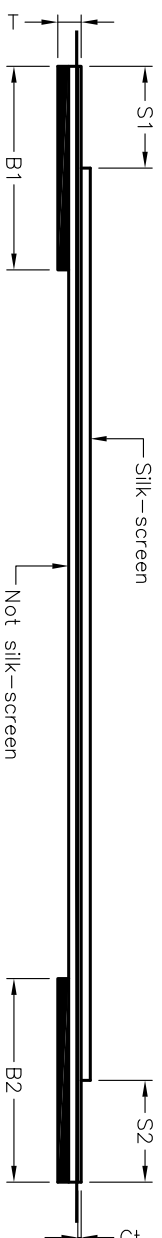
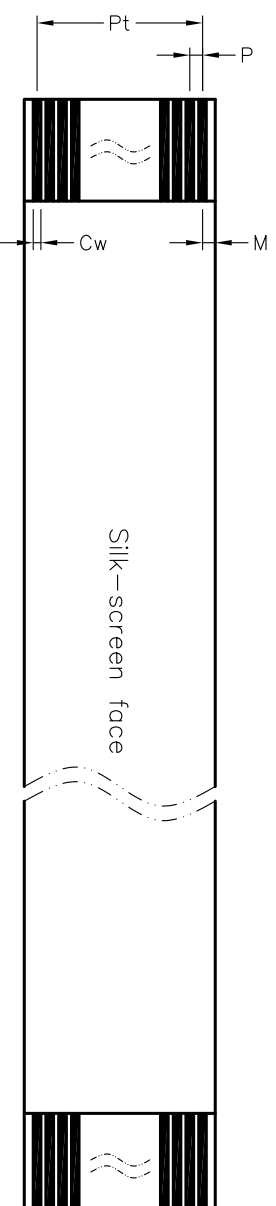


BOM			
No.	Item	Specification	Remarks
1	Insulation film	JINDA UL20624 White PET(43 μ m)	flame retardant rating VW-1
2	Reinforcement plate	Blue PET(225 μ m)	
3	Conductors (Flat copper wire)	Thickness 0.035mm Width 0.30mm Plating Sn	± 0.005 ± 0.03 $\geq 1\mu$ m
4	Number of Conductors	N	30

Dimensions (Unit: mm)			
1	Total length	TL	± 3
2	Total width	W	± 0.1
3	Margin width	M	± 0.1
4	Pitch	P	± 0.08
5	Span	Pt	± 0.1
6	Thickness of connection area	T	± 0.05
7	Strip length	S1	± 1.0
		S2	± 1.0
8	Reinforcemen length	B1	± 1.0
		B2	± 1.0

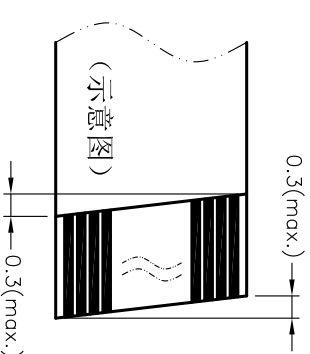

GENERAL TOLERANCE	
XX: ± 0.40	
X: ± 0.30	
.X: ± 0.25	X: $\pm 2^\circ$
.XX: ± 0.15	.X: $\pm 1^\circ$

SCALE:	3.5:1
UNIT:	mm

DRAWN:	Luoshengrong
CHECK:	
APPROVE:	Xiaozhi jun

DATE:	2024.4.20
DATE:	
DATE:	2024.4.20

DOCUMENT NO:	JD-Y-EF001
TITLE:	工程图

REVISION:	A
SHEET:	1/1