


OA80AP Sleeve Bearing Series



AC Fan - 115V
80mm x 38mm (3.2" x 1.5")

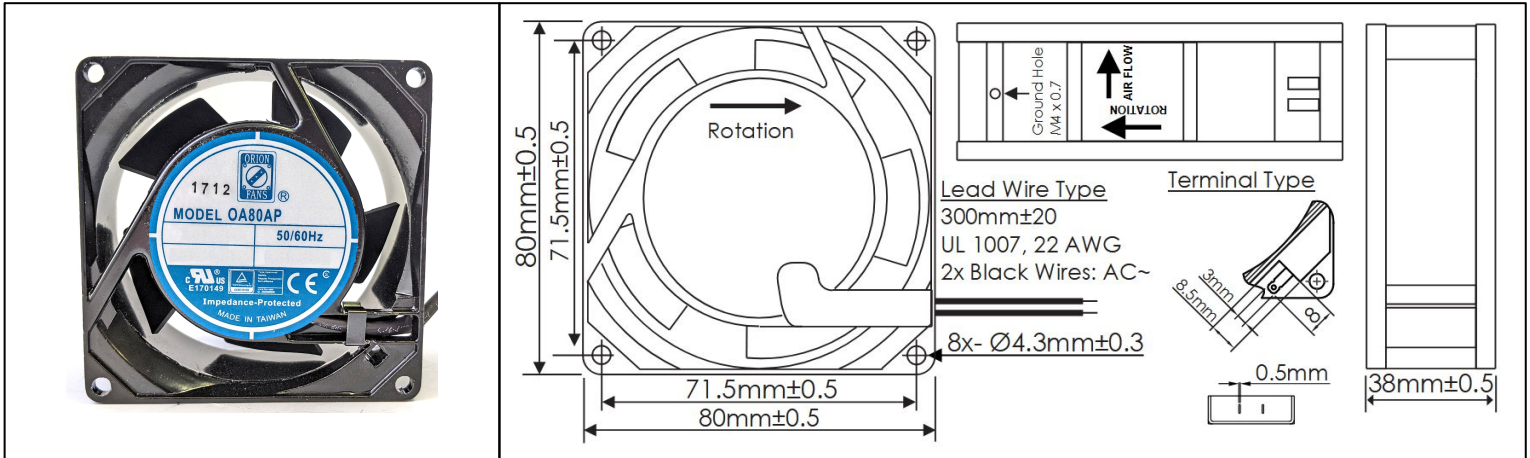

Frame	Die Cast Aluminum, Black Finish	<u>Operating Temperature</u> -40°C ~ +70°C <u>Storage Temperature</u> -40°C ~ +80°C <u>Life Expectancy</u> 15K Hours (L10 @ 40°C) Weight: 0.62 lbs.
Impeller	PBT, UL94 V-0 Plastic	
Connection	2x Lead Wires, 22 AWG, or Terminals	
Motor	Shaded Pole, Single Phase, Impedance Protected, Class B Insulation	
Bearing System	Sleeve Bearing	
Dielectric Strength	1500VAC/min, <1mA	
Insulation Resistance	≥10M Ohm @ 500 VAC	

Part Number	Rated Voltage (Volts AC)	Voltage Range (Volts AC)	Frequency (Hertz)	Locked Current (Amps)	Rated Power (Watts)	Rated Speed (RPM)	Max Airflow (CFM)	Min Noise Level (dBA)	Max Static Pressure (" H2O)
OA80AP-11-1*S	115	100 ~ 125	50 / 60	0.14 / 0.12	12 / 9	2425 / 2900	23 / 28	32 / 36	0.13 / 0.19

*Insert "T" for Terminal type Power Connection, "W" for Wire Lead type Power Connection