




SPECIFICATIONS

Material


Insulator : PBT, glass reinforced, rated UL 94V-0
 Contact : Phosphor Bronze

Electrical


Current Rating : 1 Amp
 Contact Resistance : 30 mΩ max.
 Insulation Resistance : 3000 MΩ min.
 Dielectric Withstanding Voltage : 500V AC for 1minute
 Operating Temperature : -40°C to +105°C
 * Terminated with 1.00mm pitch flat ribbon cable.

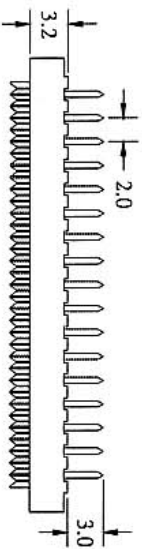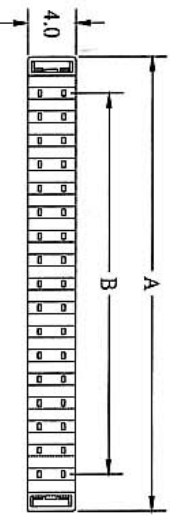

POSITION	A	B
8	12.20	6.00
10	14.20	8.00
12	16.20	10.00
14	18.20	12.00
16	20.20	14.00
20	24.20	18.00
22	26.20	20.00
24	28.20	22.00
26	30.20	24.00
30	34.20	28.00
34	38.20	32.00
40	44.20	38.00
44	48.20	42.00
50	54.20	48.00
68	72.20	66.00



(5.2)
 TERMINATED
 HEIGHT



RECOMMENDED P.C.B LAYOUT

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT
 MM

SCALE

PART NAME

2.0mm Dip Plug

DRAWING. APPROVED

APPD. CKD.

TOLERANCE

PART NO.

REV. A

制表日: 2005/08/16

heavin

C9100-XXXXB0000R