


MATERIAL	
CONTACT	BRONZE
INSULATOR	PBT 130X CLASS FIBRE (UL-94V-0)
COLOR	BLACK OR GRAY
CONTACT PLATED	GOLD OVER NICKEL
ELECTRICAL	
CURRENT RATING	3 Amp
OPERATING TEMPERATURE	-55°C TO +105°C
VOLTAGE	500 VOLTS RMS 60 HZ AT SEA LEADER ON MIN CONTACT SPACING
INSULATION RESISTANCE	1000 MEGOHMS

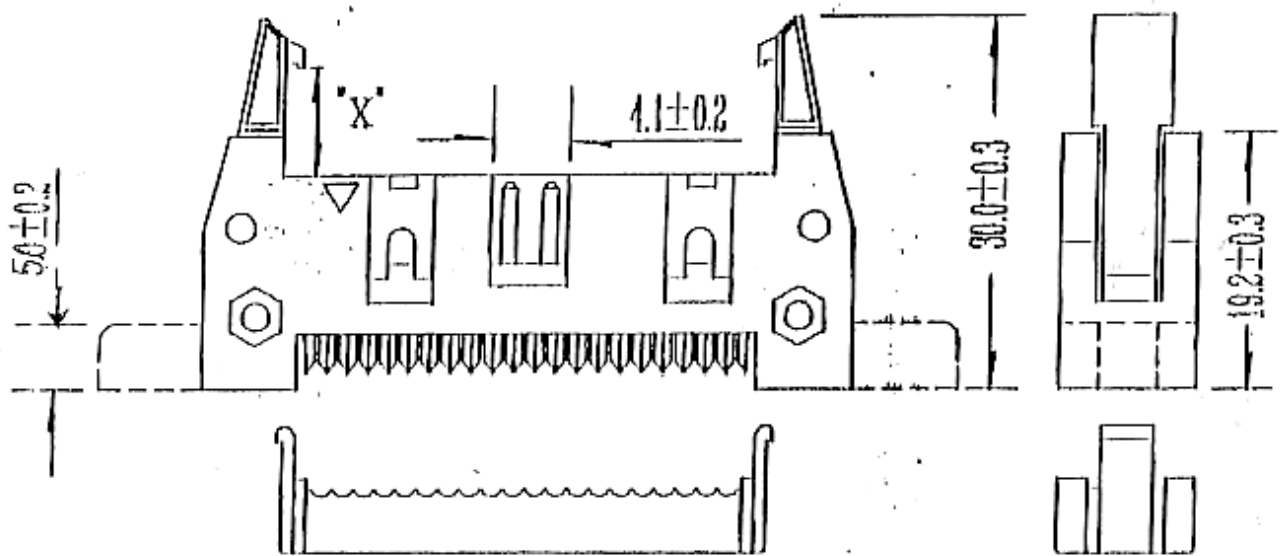

NO OF CONTACT	10.14.16.20.24.26	± 2.54 mm Center
CONTACT MATERIAL	BRONZE	
CONTACT PLATED	GND	
	G	
EAR	WITHOUT	WITH
	N	Y
COLOR	BLACK	GRAY
	K	G

Marites

UNIT
MM

SCALE
2 : 1

PART NAME
2.54X2.54 Shrouded Header
IDC Type

2000/05/14

DWG.
TINA

APPROVED
SHELLEY

APPD.

CKD.

TOLERANCE

± 0.5

PART NO.

REV.

A