


MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.





CONTACTS: 0.35mm THICKNESS PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
 TIN PLATING OVER NICKEL IN SOLDER AREA.

※ 凡標註記號者, 為品管檢驗之尺寸

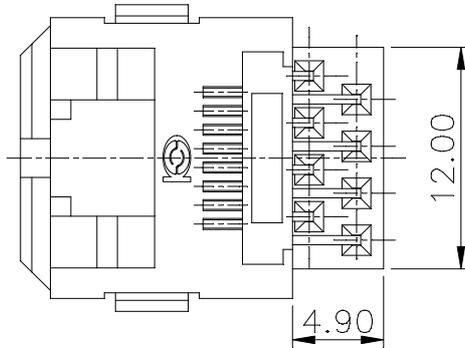

- 6u" P/N 3026665500
- 15u" P/N 3026665600
- 30u" P/N 3026665700
- 50u" P/N 3026665800

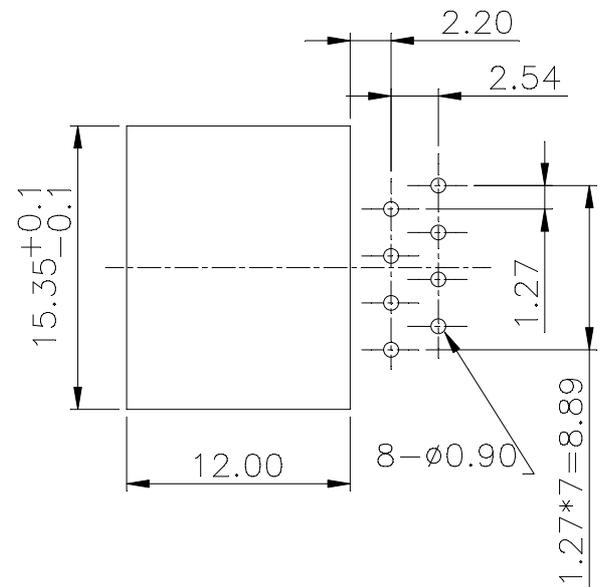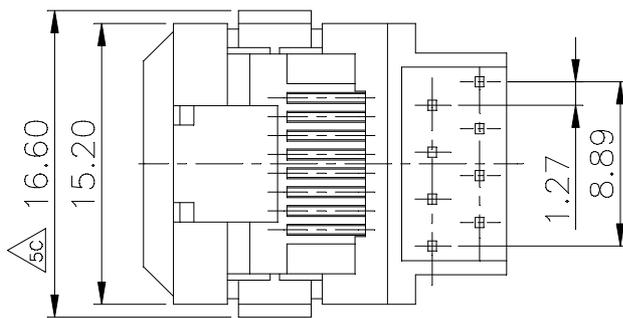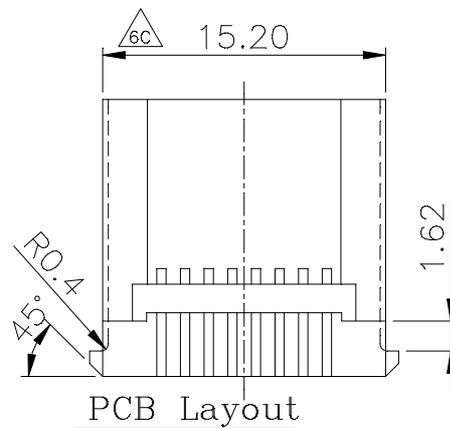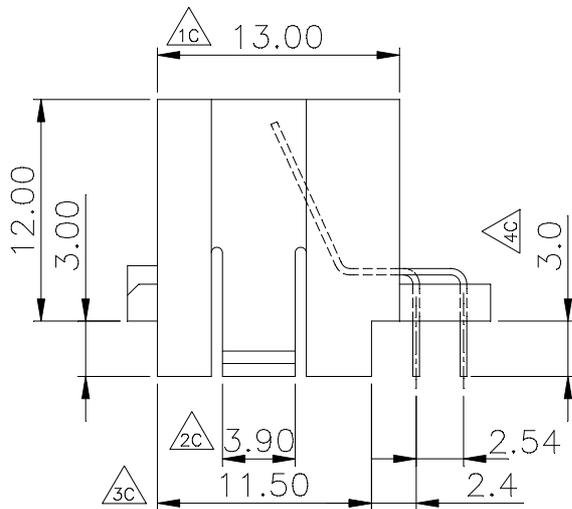

設計 DR. LILY 88-10-22	核准 APPD. Jerry 93-01-07	容許公差 .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	TOLERANCE	品名 ARTICLE BOTTOM ENTRY JACK 8P8C 孔深
版本說明 REVISION NOTE		圖號 DWG NO. 3026665500		單位 UNIT mm
				比例 SCALE 2.5/1
				張數 SHEET 1/1
				版本 REV. A