




REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2013.02.25	李芳忠

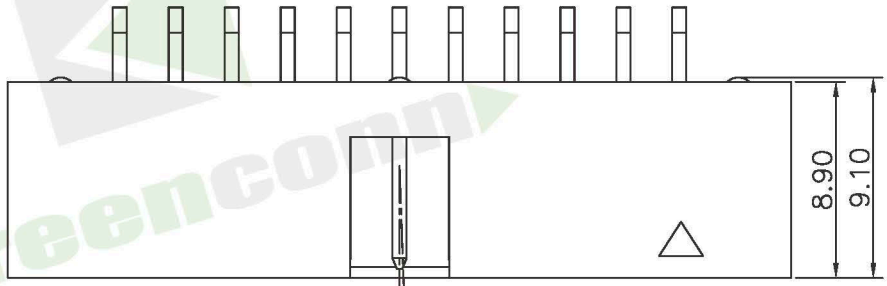

2° MAX SWAY
(EITHER DIRECTION)

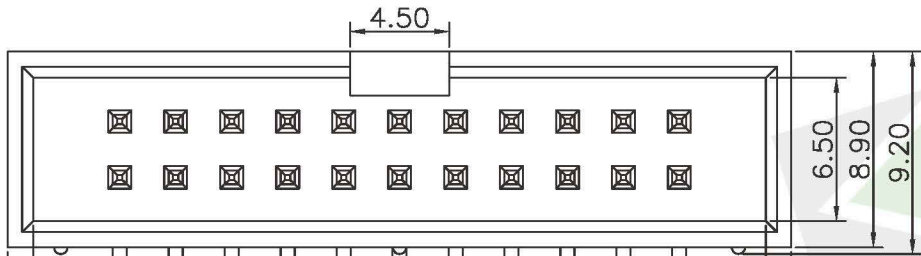


2.54 ± 0.15
PIN 0.64 SQ
2.54 X No. of Contacts - 2.54 ± 0.25
5.32 + 2.54 X No. of Positions ± 0.30
7.62 + 2.54 X No. of Positions ± 0.38

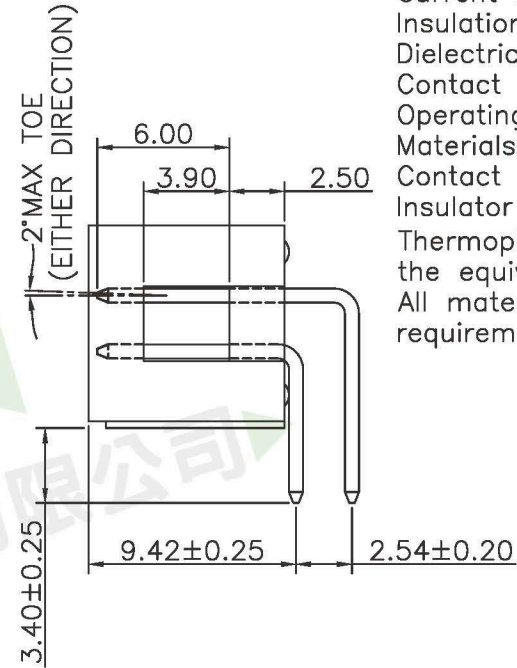

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T(無鹵) or the equivalent material
 All materials must meet Greenconn requirement for environment protection.

Recommended P.C.Board Layout
(Tolerance: ±0.05)



Ordering Information

G PHB204 - XX XX A 040 R 1 B X

No. of Pins per Row 03~32
 Standard Plating 02=Gold Flash
 Selective Plating 01=Tin 05=Gold Flash/Tin
 Color 1=Black
 Standard Packing A=Box
 Selective Packing C=Tube

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE	
X. ± 5.0°	X. ± 0.30
.X ± 3.0°	.X ± 0.25
.XX ± 2.0°	.XX ± 0.15
.XXX ± 1.0°	.XXX ± 0.10

DESIGN: 李芳忠
 CHECKED: 劉北平
 AUDITED: 李輝
 APPROVED: cc_li

DATE: 2013.02.25
 DATE: 2013.02.25
 DATE: 2013.02.25
 DATE: 2013.02.25

DWG. NO.
 GPHB204-CA40RB
 PART NO.
 GPHB204-XXXX A040R1BX

TITLE.
 2.54 BOX HEADER
 DUAL ROWS R/A TYPE
 CONNECTOR

REV.	UNIT.	SCALE.	PAGE.
01	mm	3:1	1/1