


◆ SPECIFICATION

DESCRIPTION

UL2896 - 36N × 150mm * 0,5p * (4/4 , 8/8) * (0,05*0,32) * P7

► CABLE TYPE (PATTERN : 7)

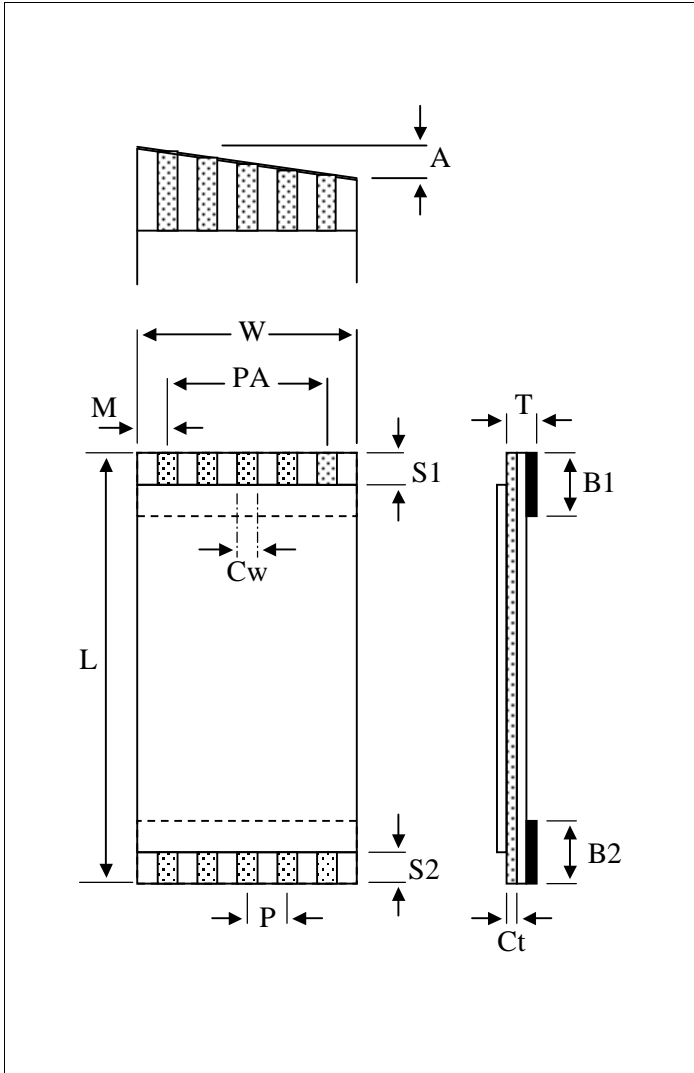

► CABLE DIMENSION [unit : mm]

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	0,5	± 0.050
NO. OF CONDUCTOR	N	36	-
CABLE LENGTH	L	150	± 3.00
STRIP LENGTH	S1	4	± 1.0
	S2	4	± 1.0
S/T LENGTH	B1	8	± 2.0
	B2	8	± 2.0
INSERT THICK	T	0,3	± 0.05
WIDTH	W	18,50	± 0.10
SPAN	PA	17,50	± 0.10
MARGIN	M	0,50	± 0.10
CONDUCTOR THICK	Ct	0,05	± 0.01
CONDUCTOR WIDTH	Cw	0,32	± 0.03
LESS THAN	A	0,5	-
PLATED	PL	1 μ m ↑	

◎ REMARK