

**MATERIALS:**

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC  
FLAMMABILITY RATING UL 94V-0.

CONTACTS: 0.35MM THICKNESS PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.



TIN PLATING OVER NICKEL IN SOLDER AREA.

6u" P/N 3030615500;3030626100


15u" P/N 3030615900;3030626200

30u" P/N 3030616400;3030626300

50u" P/N 3030616900;3030626400

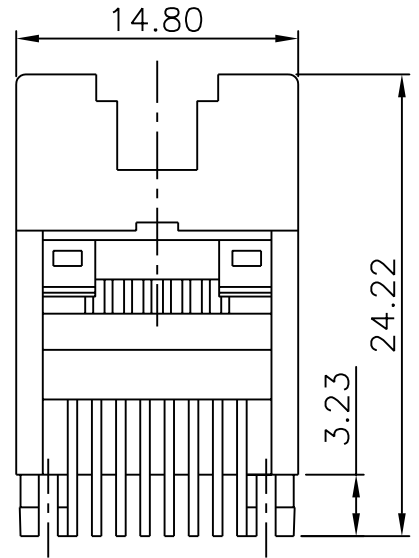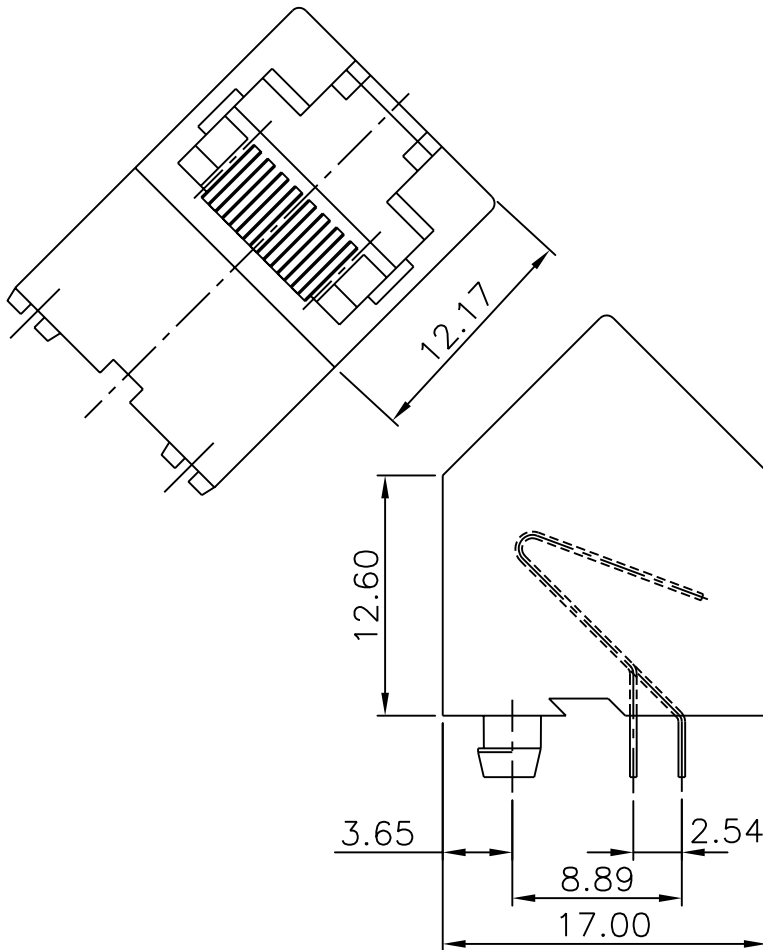

PCB LAYOUT/TOP VIEW

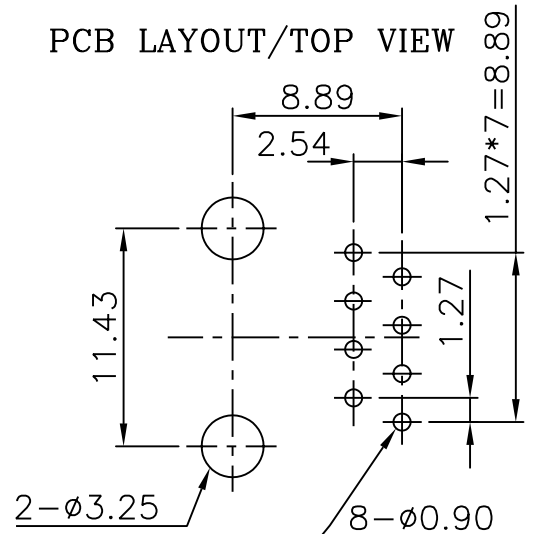

修正 REVISION	日期 DATE	容許公差 TOLERANCE	品名 45° RJ45 PCB JACK
		.XXX ±0.10	ARTICLE (8P8C UNSHIELDED)
		.XX ±0.25	圖號 3030615500
		.X ±0.38	DWG NO.
		X ±0.50	單位 UNIT mm
核准 APPD.		校對 CHKD.	比例 SCALE 2.5/1
設計 DR. Hsu		張數 SHEET 1/1	版本 REV. A
		88-06-29	

