




**Material:**

- \* Insulator: LCP With 35% GF/mineral. or Nylon 9T UL 94V-0
- \* Contact: Phosphor Bronze

**Ordering Code:**

**CBC1 \*\* \* D 1 0 0**  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② No. of Contact:  
With Key: 10,20,30~100(X1= 100)  
Without Key: 6~100
- ③ Plating code:  
2= Gold flash plated over 1.27μm(50μ") Nickel  
3= 0.38μm(15μ") Gold plated over 1.27μm(50μ") Nickel  
4= 0.76μm(30μ") Gold plated over 1.27μm(50μ") Nickel
- ④ Tail Style: D = DIP Type
- ⑤ Insulator Color: 1 = Black
- ⑥ Other option:  
0= Without Key and Peg  
1= With Key and Peg  
2= Without Key , With Peg
- ⑦ Material option:  
0= LCP With 35% GF/mineral.  
M= Nylon 9T

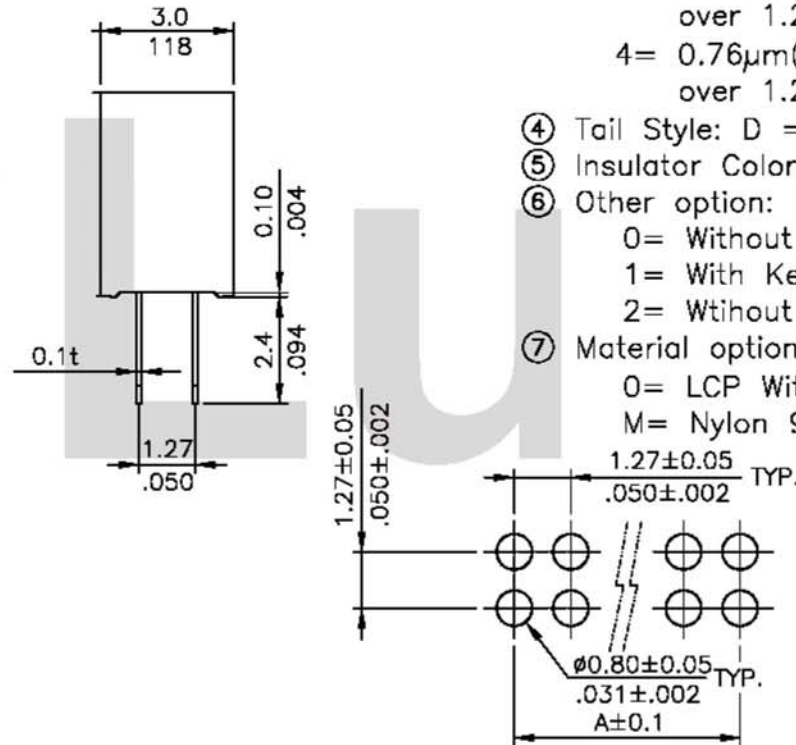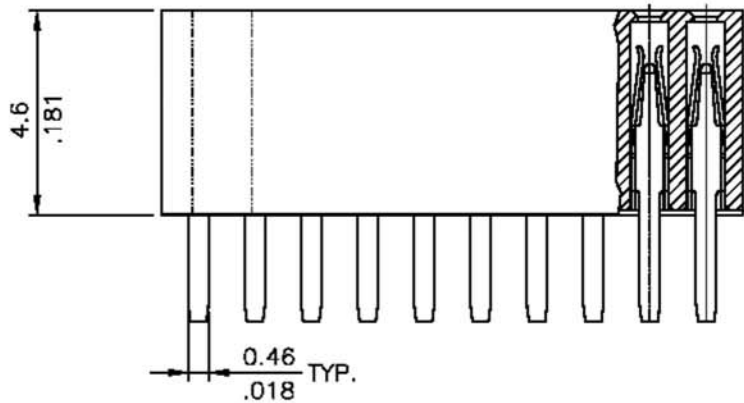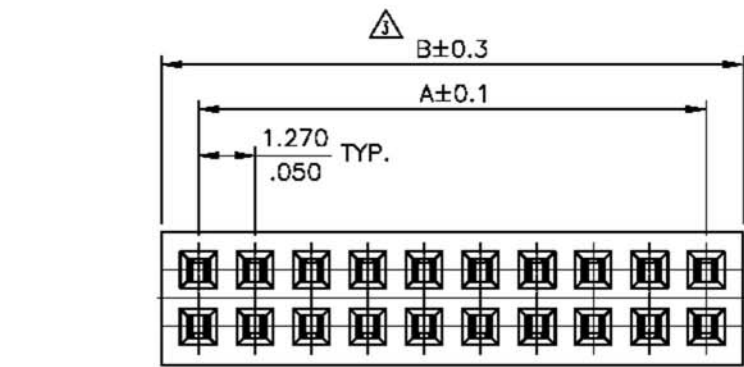


DIM. A = 1.27 X No. of Spaces  
 DIM. B = DIM. A + 1.67

\* Available in 6 through 100 Circuits

Lead Free Process  
 RoHS Compliant

Recommended P.C. Board Layout

④					DATE	UNIT: mm / inch	TITLE: 1.27X1.27mm DIP TYPE SOCKET	 瀚荃股份有限公司 CviLux Corporation
③	Sandy	5/3-07'	ECN07156/ECR07018-1	2007.05.21	DRAWN BY: Sandy	5/03-07'	MATERIAL:	
②	SUN	10/18/04	ECR04056-1/ECN04394	ISSUED	ENGINEER: Eisley	5/15-07'		FINISH:
①	SUN	4/08/04'	ECN04141		CHECKED BY: David	5/15-07'	DRAWING NO. CBC106SD	
SYM	NAME	DATE	REVISIONS		APPROVED BY: Alex	5/15-07'	SCALE 7 / 1	SHEET 1 OF 1