
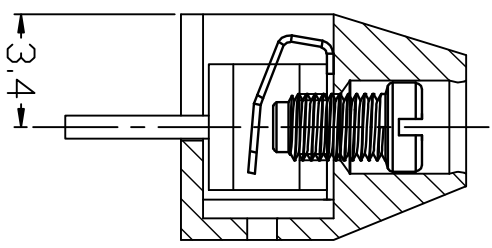


REV	DESCRIPTION	DRAWN	CHECKED	APPROVED

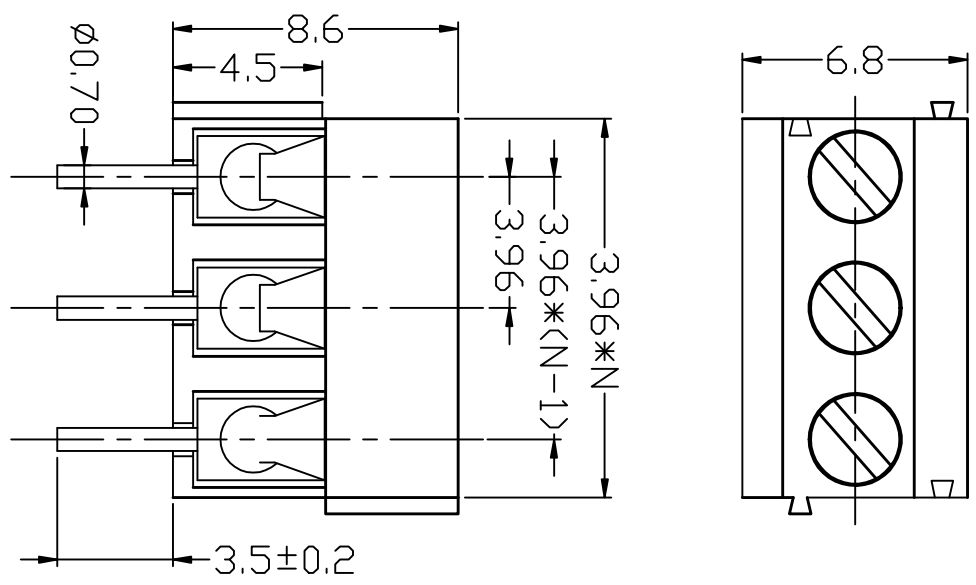

Material
 Screws: M2.5 Steel Zinc Plated
 Wire guard: phosphor bronze Ni plated
 or stainless steel
 Pin Header: Brass, Tin Plated
 Housing: PA66, UL94V-0

Electrical
 Rated Voltage: 300V
 Rated Current: 7A
 Contact Resistance: 20mOhm
 Insulation Resistance: 5000MOhm/1000V
 Withstanding Voltage: AC 1500V/1Min
 Wire Range: 24 - 18AWG

Mechanical
 Temp. Range: -40C - +105C
 Max. Soldering: +250C for 5sec
 Torque: 0.2Nm
 Strip Length: 4.5 - 5mm

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	±0.25	X.	±5°	UNIT	mm	EURO TERMINAL BLOCKS	
.X	±0.15	.X	±3°	SHEET SIZE	A4	PITCH:3.96MM	
.XX	±0.10	.XX	±2°	DRAWING TYPE		SERIES KF396V SERIES	
SCALE 1:1		SHEET 1 OF 1		DFP 慈溪市凯峰电子有限公司 <small>KAIFENG ELECTRONIC</small> KAIFENG ELECTRONIC CO.,LTD			
DRAWING NO.							