
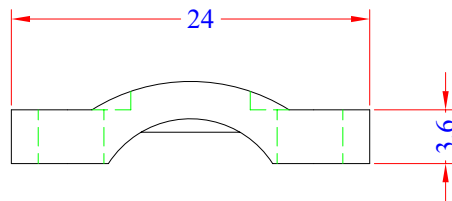
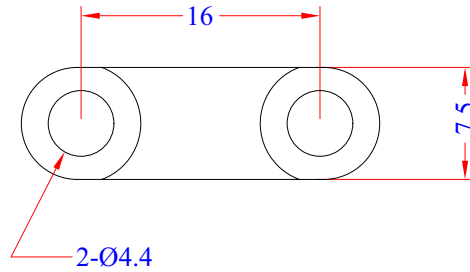


DIM.	TOL
5mm DOWN	±0.2
5~20mm	±0.3
20~40mm	±0.4
40~60mm	±0.5
60~100mm	±0.8
100mm UP	±1.0



SPEC. DWG.

NYLON 66 UL94HB
+15%GF

2007.03.15

BUNNY

ISO 9001

CLT-5(B)

CLT-5

BLACK

This document was created using



To remove this message, purchase the product at www.SolidDWG.com