


### Ordering Information

G PHA201 - XX XX A 01


No. of Pins per Row 02-40  
 Contact Plating 01=Tin, 02=Gold Flash, Duplex Plating, 05=Gold Flash/Tin

**Specifications**  
 Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC/DC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**  
 Contact Material: Copper Alloy  
 Insulation Material: Polyester, UL 94V-0 P.B.T  
 All materials must be GP materials

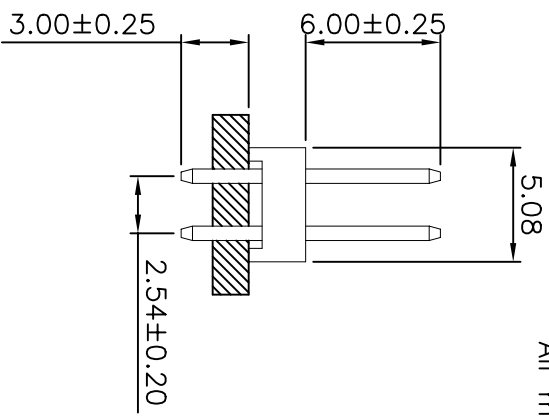

Recommended P.C.Board Hole Layout



REV. 01	UNIT mm	SCALE 3=1		<b>格稜股份有限公司</b> <b>Greencom Corporation</b>		<b>GENERAL TOLERANCE</b> X. ± 5' X. ± 1' X. ± 2' X. ± 0.38 XX. ± 1' XX. ± 0.25 XXX. ± 0.5' XXX. ± 0.13		<b>DRAWN</b> LENGJIANJUN	<b>DATE</b> 09-02-04	<b>DWG. NO.</b> G PHA201-A01	<b>TITLE</b> 2.54 PIN HEADER DUAL ROW DIP TYPE BASE 2.54H
				<b>CHECK</b>	<b>DATE</b>	<b>PART NO.</b> G PHA201-XX XX A 01	<b>APPROVE</b>	<b>DATE</b>			