

序号/Rev.No.	名称/Title	文件编号/File No.
1	114单排塑料件	QJ/XYT-11124
2	114端子图(直)	QJ/XYT-11128

Specifications:

Contact Resistance: 30mΩ max.at DC 100 mA

Insulator Resistance: 1000MΩ min.at DC 500V


Current Rating: 1A/M/P

Dielectric Withstanding Voltage: AC 500V For 1 minute

Operating Temperature: -55°C---+105°C

Contact: Brass

Housing: PBT &30% Glass Fiber(UL 94V-0)

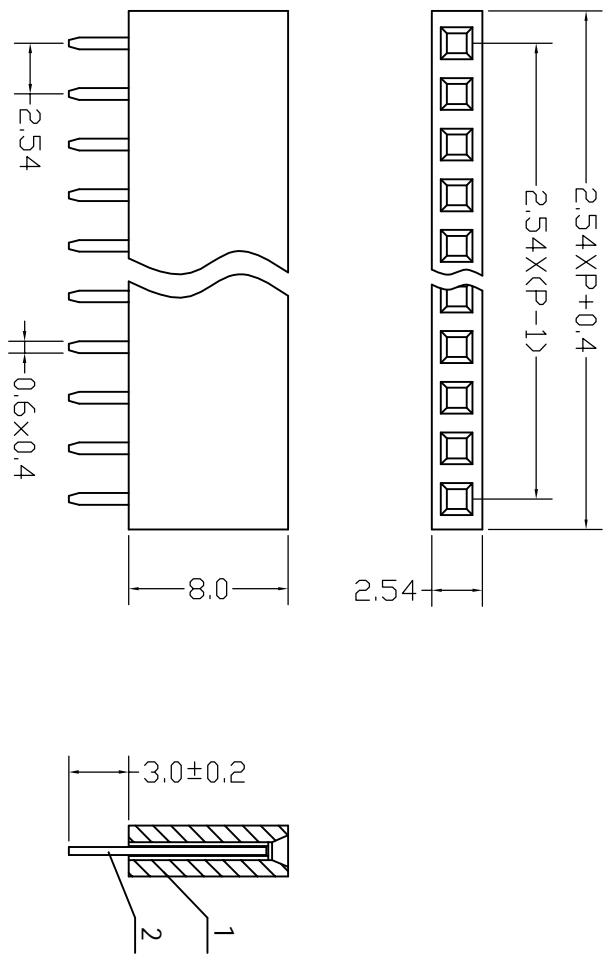

- 要求:
1. 塑料件无裂痕。
  2. 整排端子成一直线，相邻端子之间相互平行。

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X: ±0.2 X*: ±2°
				.X: ±0.1 .X*: ±1°
				.XX: ±0.05 .XX*: ±0.5°
				.XXX: ±0.01
设计/Designed by				单位/Units: mm
审核/Checked by				
批准/Approved by				
图名/Title				
114-A-SSXXG				
文件编号/File No.				
页序/Sheet				
备注/Remark				
序号/Rev.No.	更改记录/Revision note	签名/Signature	日期/Date	



**新亚电子**  
XINYA ELECTRONIC CO.,LTD