
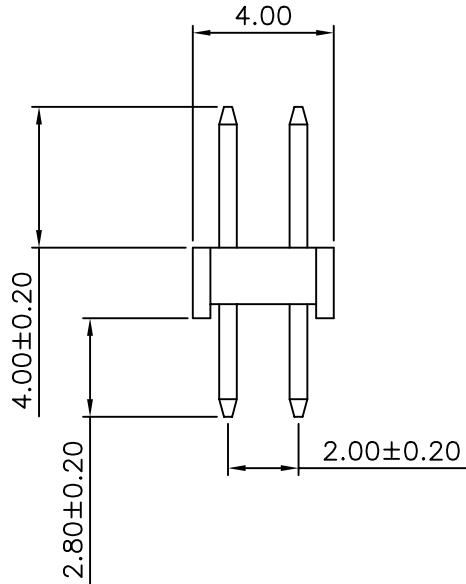
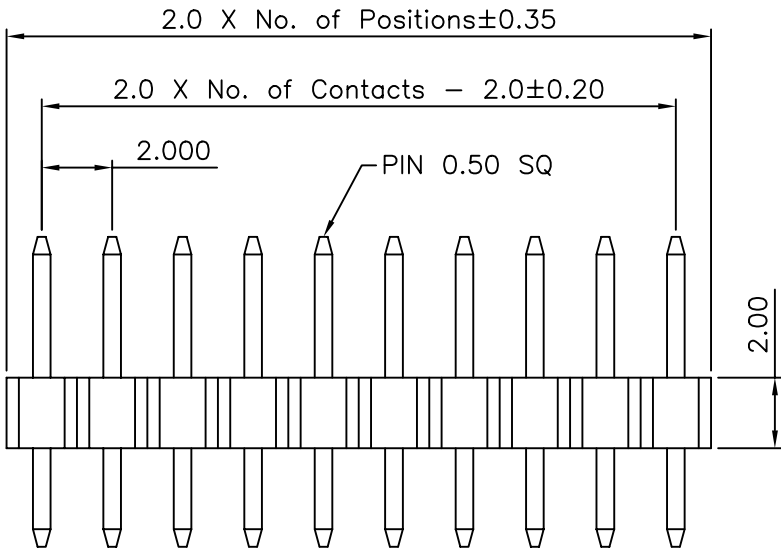



REV.	DESCRIPTION	DATE

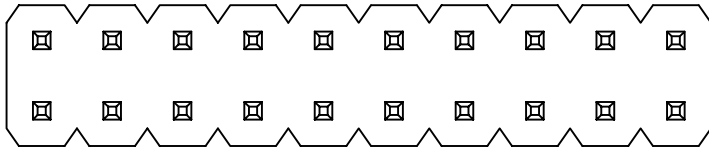

Specifications
 Current Rating: 2Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials
 Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0 PBT
 All materials must be GP materials

Recommended P.C.Board
 Hole Layout

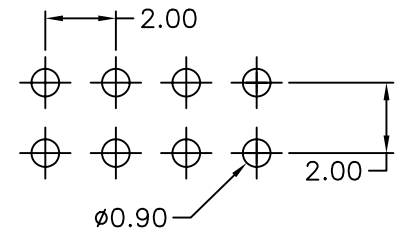

Ordering Information

G PFA201 - XX XX A 01

No. of Pins per Row
 02-40

Contact Plating
 01=Tin
 02=Gold Flash
 Duplex Plating
 05=Gold Flash/Tin
 ...

格稜股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.* ± 5°	X. ±
.X* ± 2°	.X ± 0.38
.XX* ± 1°	.XX ± 0.25
.XXX* ± 0.5°	.XXX ± 0.13

DESIGN: XIAO PING

DATE: 09-13-04'

DWG. NO.

G PFA201-A01

TITLE:

2.00 PIN HEADER
 DUAL ROWS DIP TYPE
 BASE 2.00H

CHECKED:

DATE:

PART NO.

G PFA201-XX XX A01

AUDITED:

DATE:

APPROVED:

DATE:

REV.	UNIT.	SCALE.	
01	mm	5:1	