


◆ SPECIFICATION

| | |
|-------------|---|
| DESCRIPTION | UL2896 - 24N × 110mm * 1.0p * (4/4 , 8/8) * (0,1*0,65) * P7 |
|-------------|---|

▶ CABLE TYPE (PATTERN : 7)

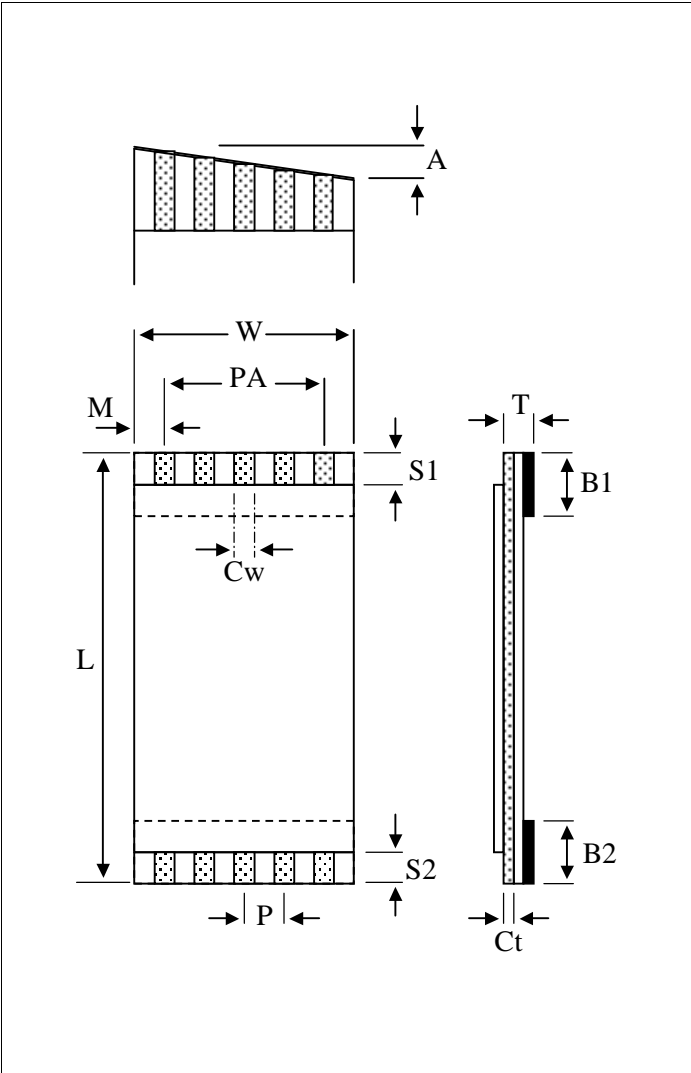

▶ CABLE DIMENSION [unit : mm]

| DESCRIPTION | Abbr | Dimension | Tolerance |
|------------------|------|----------------------|------------|
| PITCH | P | 1.0 | ± 0.10 |
| NO. OF CONDUCTOR | N | 24 | - |
| CABLE LENGTH | L | 110 | ± 3.00 |
| STRIP LENGTH | S1 | 4 | ± 1.0 |
| | S2 | 4 | ± 1.0 |
| S/T LENGTH | B1 | 8 | ± 2.0 |
| | B2 | 8 | ± 2.0 |
| INSERT THICK | T | 0,3 | ± 0.05 |
| WIDTH | W | 25,00 | ± 0.15 |
| SPAN | PA | 23,00 | ± 0.15 |
| MARGIN | M | 1.0 | ± 0.15 |
| CONDUCTOR THICK | Ct | 0,10 | ± 0.01 |
| CONDUCTOR WIDTH | Cw | 0,65 | ± 0.03 |
| LESS THAN | A | 0,5 | - |
| PLATED | PL | 1 μ m \uparrow | |

◎ REMARK