


Poles	Dimension(mm)		
	A	B	C
2	1.50	4.50	3.40
3	3.00	6.00	4.90
4	4.50	7.50	6.40
5	6.00	9.00	7.90
6	7.50	10.50	9.40
7	9.00	12.00	10.90
8	10.50	13.50	12.40
9	12.00	15.00	13.90
10	13.50	16.50	15.40
11	15.00	18.00	16.90
12	16.50	19.50	18.40
13	18.00	21.00	19.90
14	19.50	22.50	21.40
15	21.00	24.00	22.90


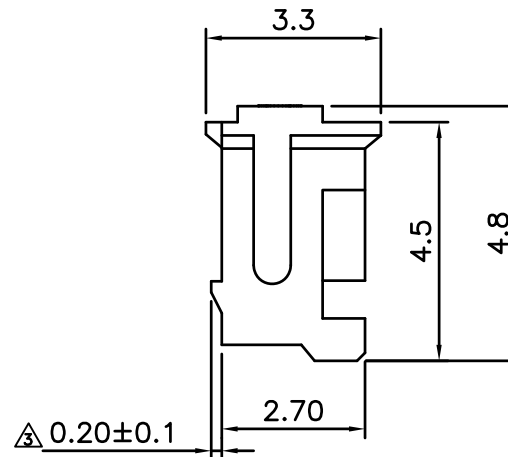


SPECIFICATIONS

- Current Rating : 1A AC/DC
- Withstanding Voltage : 500V AC/minute
- Insulation Resistance : 500MΩ min
- Temperature Range : - 25°C to + 85°C
- Contact Resistance : 20mΩ max

HOUSING

- Part No. : JS-1173-XX
- Poles : 2~15
- Material : Nylon 66 UL94V-0
- Q' ty : 1000pcs./Bag

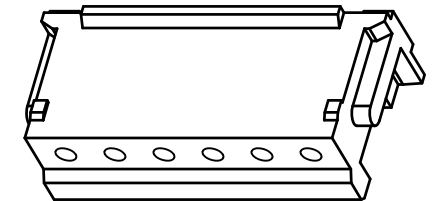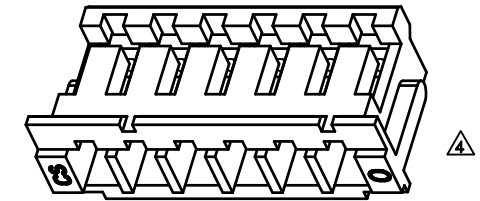

3D VIEW



喬訊電子工業股份有限公司

CHYAO SHIUNN
ELECTRONIC INDUSTRIAL LTD.

PART NO JS-1173-XX
1.50mm Crimp Style Connectors Housing

APPROVED BY	SCALE	UNIT	TOLERANCE	LTR	REVISION RECORD	NAME	DATE	LTR	REVISION RECORD	NAME	DATE
施咸光	1:1	mm	.0 ±0.30	△	RoHS Compliant	余秀麗	05/05/15	△			
CHECKED BY	PROJ	VER NO.	.00 ±0.20	△	ECR 200803-011	黃科源	08/03/10	△			
張育瑞	⊕	a4	.000 ±0.10	△	圖面整理,增加CS MARK	Jack	11-08-25	△			
DRAWN BY	DATE	SIZE	ANGLE	△	根據實物,刪除圖紙三角符號	謝君	20-04-13		CUSTOMER		
謝君	2020/04/13	A4	0° ±1°	△					Conforms to The RoHS Instruction		
			.0° ±	△							
			SHEET 1/1	△							