


VERSION	CHANGE CONTENT	DATE
V00	FIRST ISSUE	2006-09-26

TYPE	A	B
LED B/L	13.3	8.9

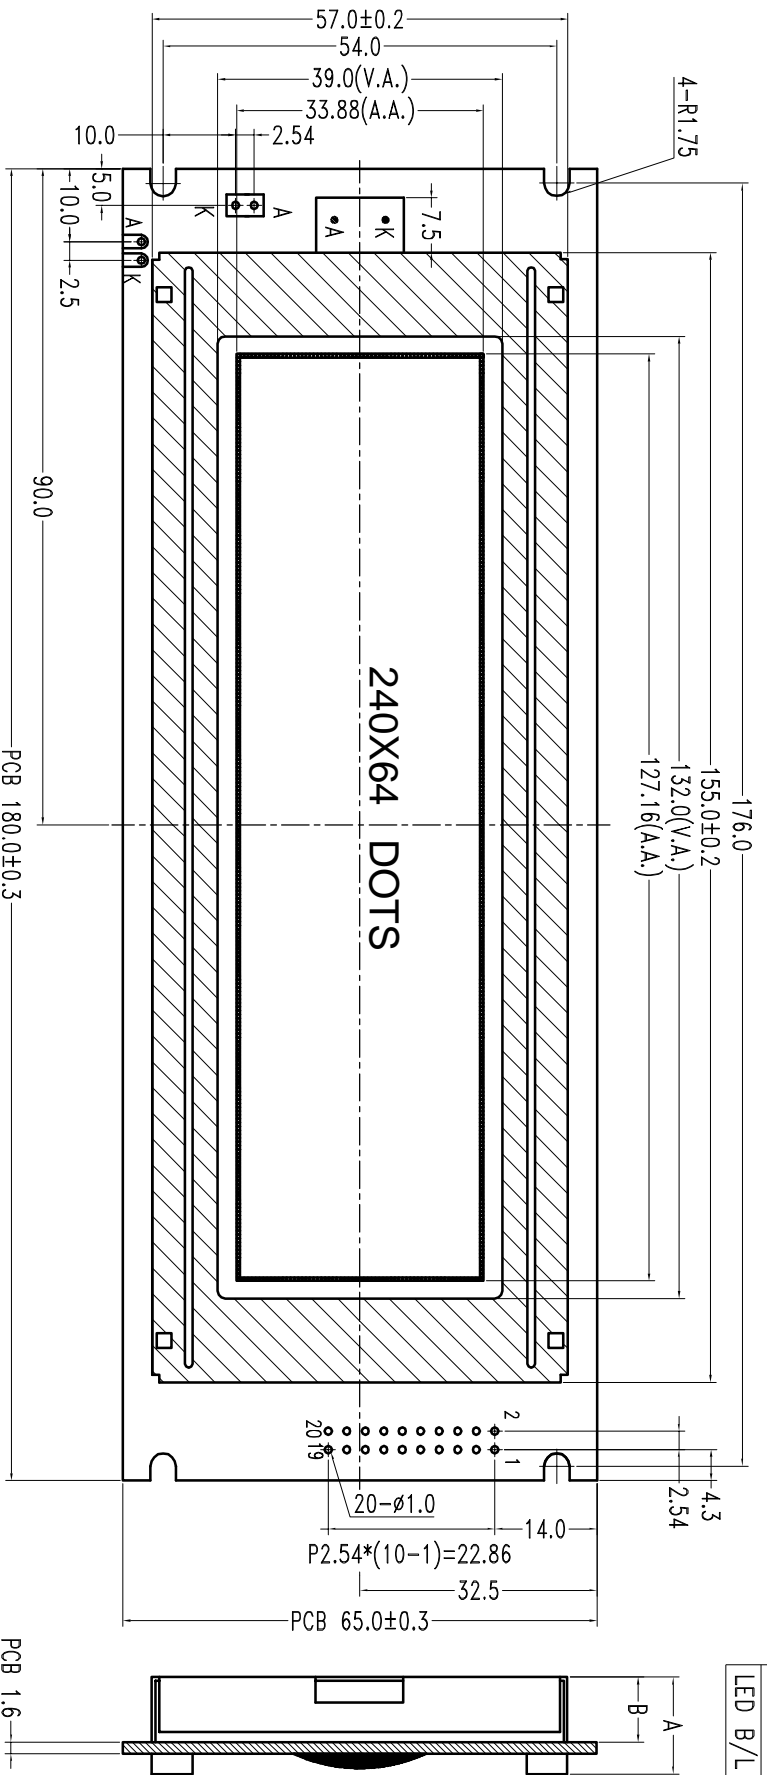

SCALE : 10 : 1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20																												
NAME	F	G	N	D	W	R	D	C	E	C	/	D	N	C	R	E	S	E	T	D	B	0	D	B	1	D	B	2	D	B	3	D	B	4	D	B	5	D	B	6	D	B	7	F	S	V	E	E

LED	A	K
LED	A	K

**SPECIFICATIONS**

1. DISPLAY TYPE: STN/T/TRANSLECTIVE/POSITIVE/V-G
2. LCD DRIVING VOLTAGE: 12.5V
3. LOGIC VOLTAGE: 5.0V
4. VIEWING DIRECTION: 6 O'CLOCK
5. OPERATING TEMP.: -10° C-60° C
6. STORAGE TEMP.: -20° C-70° C
7. DRIVE MODE: 1/64 DUTY, 1/9 BIAS
8. BACKLIGHT: YELLOW GREEN/BOTTOM BACKLIGHT/5.0V
9. CONTROL/DRIVE IC: RA8863/SPLC086A-C
10. OTHER:

**NOTE:**

**DESCRIPTION:**

**CID**

SCALE: FIT	TINSHARP	TINSHARP
SHEET: 1 OF 1	ELECTRONICS CO.,LTD.	MODEL
UNIT: PROJECTION	MM	TC24064A-10
APP:	CHK:	DATE:
DATE:	DWN:	DATE:
		SERIAL NUMBER
		YL0190