


SBC84621


AMD LX800 3.5" Embedded SBC with Dual LANs, 4 COM, 4 USB 2.0 and VGA/LVDS LCD



Features

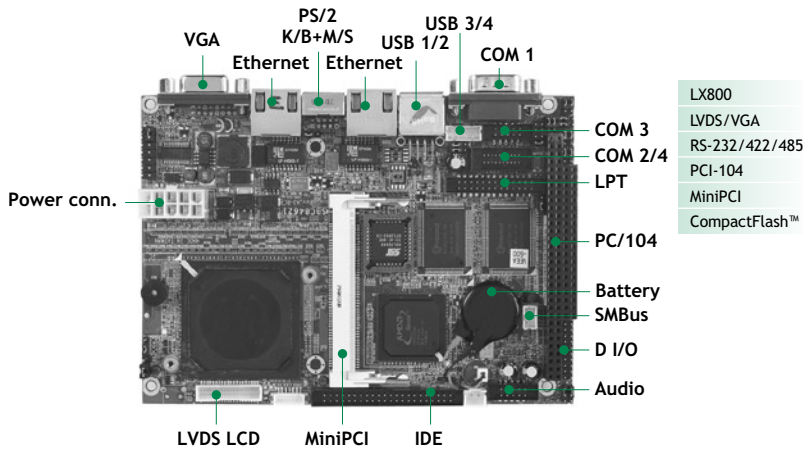

- Low power fanless AMD LX800 processor
- AMD LX800 + CS5536AD
- Dual 10/100Mbps Ethernet
- 4 COM and 4 USB 2.0 ports
- PC/104 and MiniPCI slots for expansion
- VGA and LVDS LCD
- +5V only DC-in supported

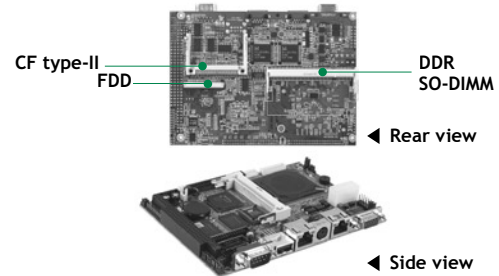

System

CPU	AMD LX800 processor onboard
System Memory	1 x 200-pin SO-DIMM supports DDR-333/400 max. up to 1 GB
Chipset	AMD LX800 + CS5536AD
BIOS	Phoenix-Award
SSD	1 x CompactFlash™ type-II
Board Unique ID	Board unique ID (optional)
Watchdog Timer	255 levels, 1~255 sec.
Expansion Interface	1 x Mini PCI 1 x PC/104 for 16-bit ISA bus
Battery	Lithium 3V/196 mAH
Power Requirements	AMD LX800 @ 500 MHz, 512MB DDR Max. RMS: +5VSB @ 62.91mA, +3.3V @ 24.31mA, +5V @ 1.071A, +12V @ 24mA, -12V @ 25mA
Size	146 x 104 mm
Board Thickness	1.6 mm
Operating Temperature	Standard: 0° C ~ +60° C (32° F ~ 140° F) Optional: -40° C ~ +85° C (-40° F ~ +185° F) -25° C ~ +70° C (-13° F ~ +158° F)
Relative Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	1 x IDE; PATA-100 1 x FDD (optional) 1 x PS/2 keyboard and mouse 1 x RS-232/422/485 (COM 1); with +5V/+12V powered 3 x RS-232 (COM 2/3/4); with +5V/+12V powered 1 x LPT; with SPP/EPP/ECP supported
SATA	N/A
Hardware Monitoring	Detect CPU/system temperature and voltage
Ethernet	2 ports as 10/100Mbps support Wake-on-LAN, RPL/PXE Boot ROM with Realtek RTL8139DL
Audio	AC'97 Codec audio as MIC-in/Line-in/Line-out/speaker-out with Realtek ALC203
USB	4 x USB 2.0
SMBus	System Management Bus for advanced monitoring/control
Digital I/O	Refer to Ordering information

Display

Chipset	AMD LX intergrated
Memory Size	Max. up to 254 MB
Display Interface	1 x VGA 1 x LVDS; 18/24-bit single channel

* W.T.: Wide Temperature

Packing List

Standard				
Quick installation guide, user's manual/utility CD, cable				
Cable				
Part Number	Description	SBC84621	SBC84621	SBC84621
		VEEA-500	VEA-500	VEE-500
		Qty	Qty	Qty
59484500010E	44-44-40 pin IDE cable	1	1	1
59402010000E	ATX power cable 10P	1	1	1
59384500000E	COM + printer cable	1	1	
59384500100E	Audio cable w/ bracket	1	1	
59382631000E	2 x USB 2.0 wafer cable	1	1	1
59380000300E	COM port x 2 w/ bracket	1	1	
59380010300E	COM port x 1 w/ bracket			1

Ordering Information

Standard								
Models	CPU	LCD	Ethernet	Audio	COM	PC/104	D I/O	
SBC84621	LX800	VGA/18-bit	2	Yes	4	Yes	8-In and 8-Out	
VEEA-500	500 MHz	LVDS						
(P/N: E384621100)								
SBC84621	LX800	VGA/18-bit	1	Yes	4	Yes	8-In and 8-Out	
VEA-500	500 MHz	LVDS						
(P/N: E384621101)								
SBC84621	LX800	VGA/18-bit	2	N/A	2	N/A	3-In and 5-Out	
VEE-500	500 MHz	LVDS						
(P/N: E384621102)								
SBC84621	LX800	VGA/24-bit	2	Yes	4	Yes	8-In and 8-Out	
VEEA-500	500 MHz	LVDS						
(P/N: E384621106)								
SBC84621	LX800	VGA/24-bit	1	Yes	4	Yes	8-In and 8-Out	
VEA-500	500 MHz	LVDS						
(P/N: E384621107)								
Optional								
Models	CPU	LCD	Ethernet	Audio	COM	PC/104	D I/O	W.T.
SBC84621	LX800	VGA/18-bit	1	Yes	4	Yes	8-In and 8-Out	-25° C ~ +70° C
VEA-500	500 MHz	LVDS						
(P/N: E384621109)								
SBC84621	LX800	VGA/24-bit	1	Yes	4	Yes	8-In and 8-Out	-25° C ~ +70° C
VEA-500	500 MHz	LVDS						
(P/N: E384621123)								

* All specifications and photos are subject to change without notice.
© 2011 Axiomtek Co., Ltd. All rights reserved.

SBC Services
and Solutions

System on
Modules

Embedded
SBCs
> EPIC

Embedded
SBCs
> 3.5" Capa

Embedded
SBCs
> Pico-ITX

Embedded
SBCs
> PC/104

Industrial
Motherboards

Slot CPU
Cards

Accessories

Appendix